

US011006244B2

(12) **United States Patent**
Snyder

(10) **Patent No.:** **US 11,006,244 B2**
(45) **Date of Patent:** ***May 11, 2021**

(54) **METHODS ON MOBILE DEVICES TO
LOCATE PERSONS**

USPC 455/456.2
See application file for complete search history.

(71) Applicant: **Alan Michael Snyder**, Alamo, CA (US)

(56)

References Cited

(72) Inventor: **Alan Michael Snyder**, Alamo, CA (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **Alan Michael Snyder**, Alamo, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

5,400,246 A	3/1995	Wilson et al.
5,777,565 A	7/1998	Hayashi et al.
5,896,554 A	4/1999	Itoh
5,928,294 A	7/1999	Zelinkovsky
5,959,529 A	9/1999	Kail, IV
6,098,048 A	8/2000	Dashefsky et al.
6,356,838 B1	3/2002	Paul
6,615,046 B1	9/2003	Ur

(Continued)

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **16/658,274**

OTHER PUBLICATIONS

(22) Filed: **Oct. 21, 2019**

PCT/US 14/67189 International Preliminary Report, dated Dec. 18,
2015.

(65) **Prior Publication Data**

(Continued)

US 2020/0053510 A1 Feb. 13, 2020

Related U.S. Application Data

(60) Division of application No. 16/048,305, filed on Jul.
29, 2018, now Pat. No. 10,455,359, which is a
continuation of application No. 15/096,258, filed on
Apr. 11, 2016, now Pat. No. 10,057,719, which is a
continuation of application No. 14/092,846, filed on
Nov. 27, 2013, now Pat. No. 9,344,849.

(51) **Int. Cl.**
H04W 4/02 (2018.01)
H04W 4/029 (2018.01)

(52) **U.S. Cl.**
CPC **H04W 4/025** (2013.01); **H04W 4/029**
(2018.02)

(58) **Field of Classification Search**
CPC H04W 4/025; H04W 4/028

Primary Examiner — Inder P Mehra


(74) *Attorney, Agent, or Firm* — Robert Moll

(57)

ABSTRACT

Methods, computer readable storage medium, and systems
for mobile devices to locate persons or places are described.
In a feature, the invention is a method implemented in a
server for providing beaconing sequences to the mobile
devices for location sharing. In a feature, the invention is a
server executing a method of locating a user using a bea-
coning mobile device. In a feature, the invention is a
non-transitory computer readable medium on a server that
encodes a program to execute a method on a first mobile
device that determine directions and/or distance between the
first mobile device and a second mobile device. In a feature,
the invention is a server executing a method to remember a
place on a mobile device.

14 Claims, 25 Drawing Sheets

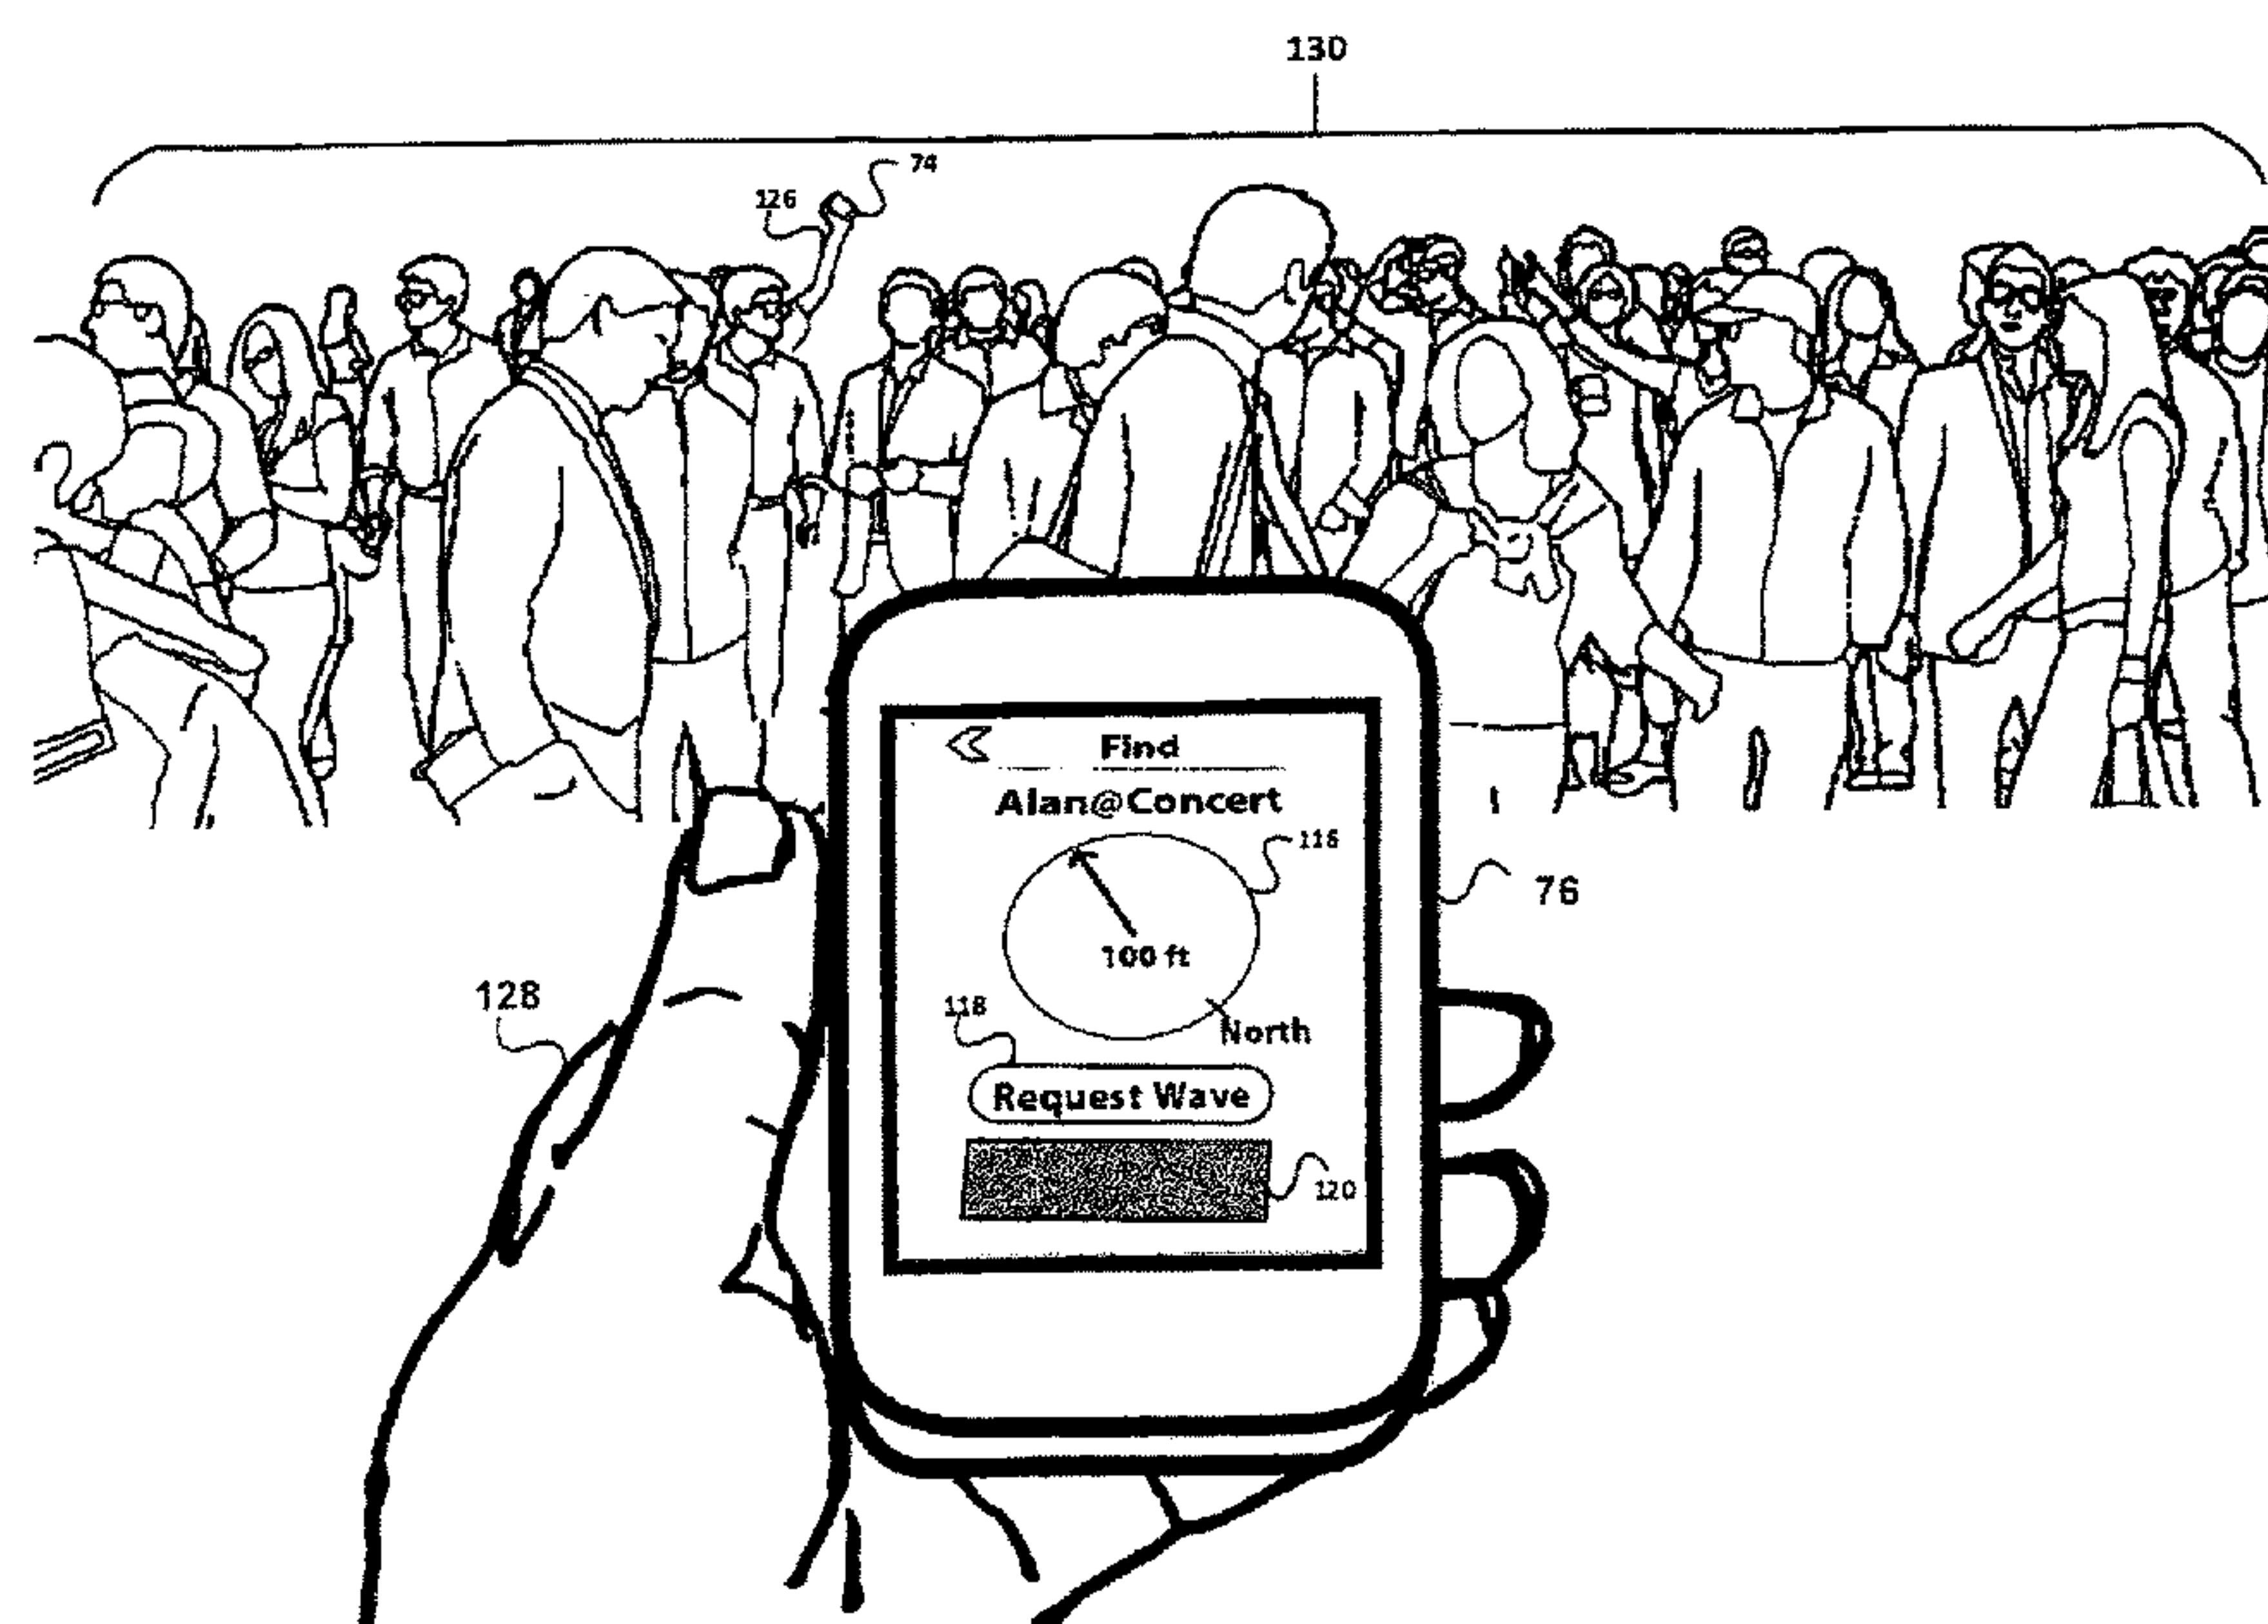

(56)

References Cited

U.S. PATENT DOCUMENTS

6,756,913 B1 6/2004 Ayed
 7,136,747 B2 11/2006 Raney
 8,200,247 B1 6/2012 Starenky et al.
 8,369,867 B2 2/2013 Van Os et al.
 8,504,089 B2 8/2013 Stewart
 8,635,556 B2 1/2014 Lalancette et al.
 9,344,849 B2 * 5/2016 Snyder H04W 4/025
 9,488,494 B2 11/2016 Millspaugh
 10,057,719 B2 * 8/2018 Snyder H04W 4/025
 10,186,188 B2 1/2019 Blanco et al.
 10,448,213 B2 * 10/2019 Snyder H04W 4/029
 10,455,359 B2 * 10/2019 Snyder H04W 4/029
 2002/0003571 A1 1/2002 Schofield et al.
 2002/0097193 A1 7/2002 Powers
 2003/0065556 A1 4/2003 Takanashi et al.
 2003/0065566 A1 4/2003 Kodaka et al.
 2004/0076280 A1 4/2004 Ando et al.
 2004/0177109 A1 9/2004 Lee
 2004/0207556 A1 10/2004 Spilker, Jr. et al.
 2005/0012598 A1 1/2005 Berquist
 2005/0070305 A1 3/2005 Krasner et al.
 2006/0229058 A1 10/2006 Rosenberg
 2006/0276960 A1 12/2006 Adamczk
 2007/0190494 A1 8/2007 Rosenberg
 2007/0258382 A1 11/2007 Foll et al.
 2008/0036653 A1 2/2008 Huston
 2008/0079539 A1 4/2008 Daley
 2008/0113618 A1 * 5/2008 De Leon H04W 12/003
 455/41.2
 2008/0238768 A1 10/2008 Nosworthy
 2009/0063236 A1 3/2009 Pennay
 2009/0083660 A1 3/2009 Lettau
 2009/0176451 A1 7/2009 Yang et al.
 2009/0233629 A1 9/2009 Jayanthi
 2009/0295560 A1 12/2009 Koliopoulos
 2010/0073201 A1 3/2010 Holcomb et al.
 2010/0100233 A1 4/2010 Lu
 2010/0248682 A1 9/2010 Prozeniuk
 2010/0277313 A1 11/2010 Vaysburg
 2011/0046845 A1 2/2011 Kozlay
 2011/0051665 A1 3/2011 Huang
 2011/0053577 A1 3/2011 Lee
 2011/0071889 A1 3/2011 Erhart et al.
 2011/0282799 A1 11/2011 Huston
 2011/0306366 A1 * 12/2011 Trussel H04L 63/0807
 455/457
 2012/0203599 A1 8/2012 Choi
 2012/0209685 A1 8/2012 Nealer et al.
 2012/0252504 A1 10/2012 Firstenberg et al.
 2012/0258741 A1 * 10/2012 Tillson G01S 3/046
 455/457

2012/0265823 A1 10/2012 Parmar et al.
 2013/0028612 A1 1/2013 Ryan et al.
 2013/0059583 A1 3/2013 Van Phan et al.
 2013/0065584 A1 3/2013 Lyon et al.
 2013/0096813 A1 4/2013 Geffner et al.
 2013/0132140 A1 5/2013 Amin et al.
 2013/0134906 A1 * 5/2013 Picariello H05B 47/175
 315/312
 2013/0178257 A1 * 7/2013 Langseth G06T 17/05
 463/4
 2014/0018103 A1 * 1/2014 Wigren G01S 5/0009
 455/456.2
 2014/0056172 A1 2/2014 Lee
 2014/0148154 A1 5/2014 Sonetaka
 2014/0155098 A1 * 6/2014 Markham H04B 1/0064
 455/456.3
 2014/0213304 A1 7/2014 Beckett
 2014/0225916 A1 8/2014 Theimer et al.
 2014/0245354 A1 * 8/2014 Kunkel H04N 5/44543
 725/44
 2014/0282620 A1 * 9/2014 Nuovo G06F 16/9535
 719/318
 2014/0350840 A1 11/2014 D'Argenio
 2015/0092676 A1 * 4/2015 Periyalwar H04W 4/029
 370/329
 2015/0178034 A1 6/2015 Penilla et al.
 2015/0220992 A1 8/2015 Brown et al.
 2015/0237481 A1 8/2015 Ben-Moshe et al.
 2015/0363829 A1 12/2015 Landers
 2015/0371273 A1 12/2015 Canpolat et al.
 2016/0241660 A1 8/2016 Nhu
 2019/0009721 A1 1/2019 Schofield et al.
 2019/0080353 A1 3/2019 Bleacher Snyder et al.
 2020/0413218 A1 * 12/2020 Houri G01S 5/0263

OTHER PUBLICATIONS

PCT/US 14/67189 Written Opinion of the International Searching Authority, dated Apr. 16, 2015.
 PCT/US 14/67189 International Search Report, dated Apr. 16, 2015.
 UTC, Wearable technology, Wikipedia, Jan. 2019.
 AppAdvice Car Finder Reviews, <http://appadvice.com/appguides/show/car-finding>, downloaded Feb. 5, 2014.
 iPhone App in iTunes store—Find Your Car with AR: Augmented Car Finder by AugmentedWorks, Dec. 2, 2013.
 iPhone App in iTunes store—Find My Car by Presselite, Oct. 23, 2013.
 iPhone App in iTunes store—iFind My Car by Mobility-BR Consultoria LTDA-EPP, Oct. 16, 2013.
 iPhone App in iTunes store—iReturn by Christoffer Miranda, Jan. 4, 2013.

* cited by examiner

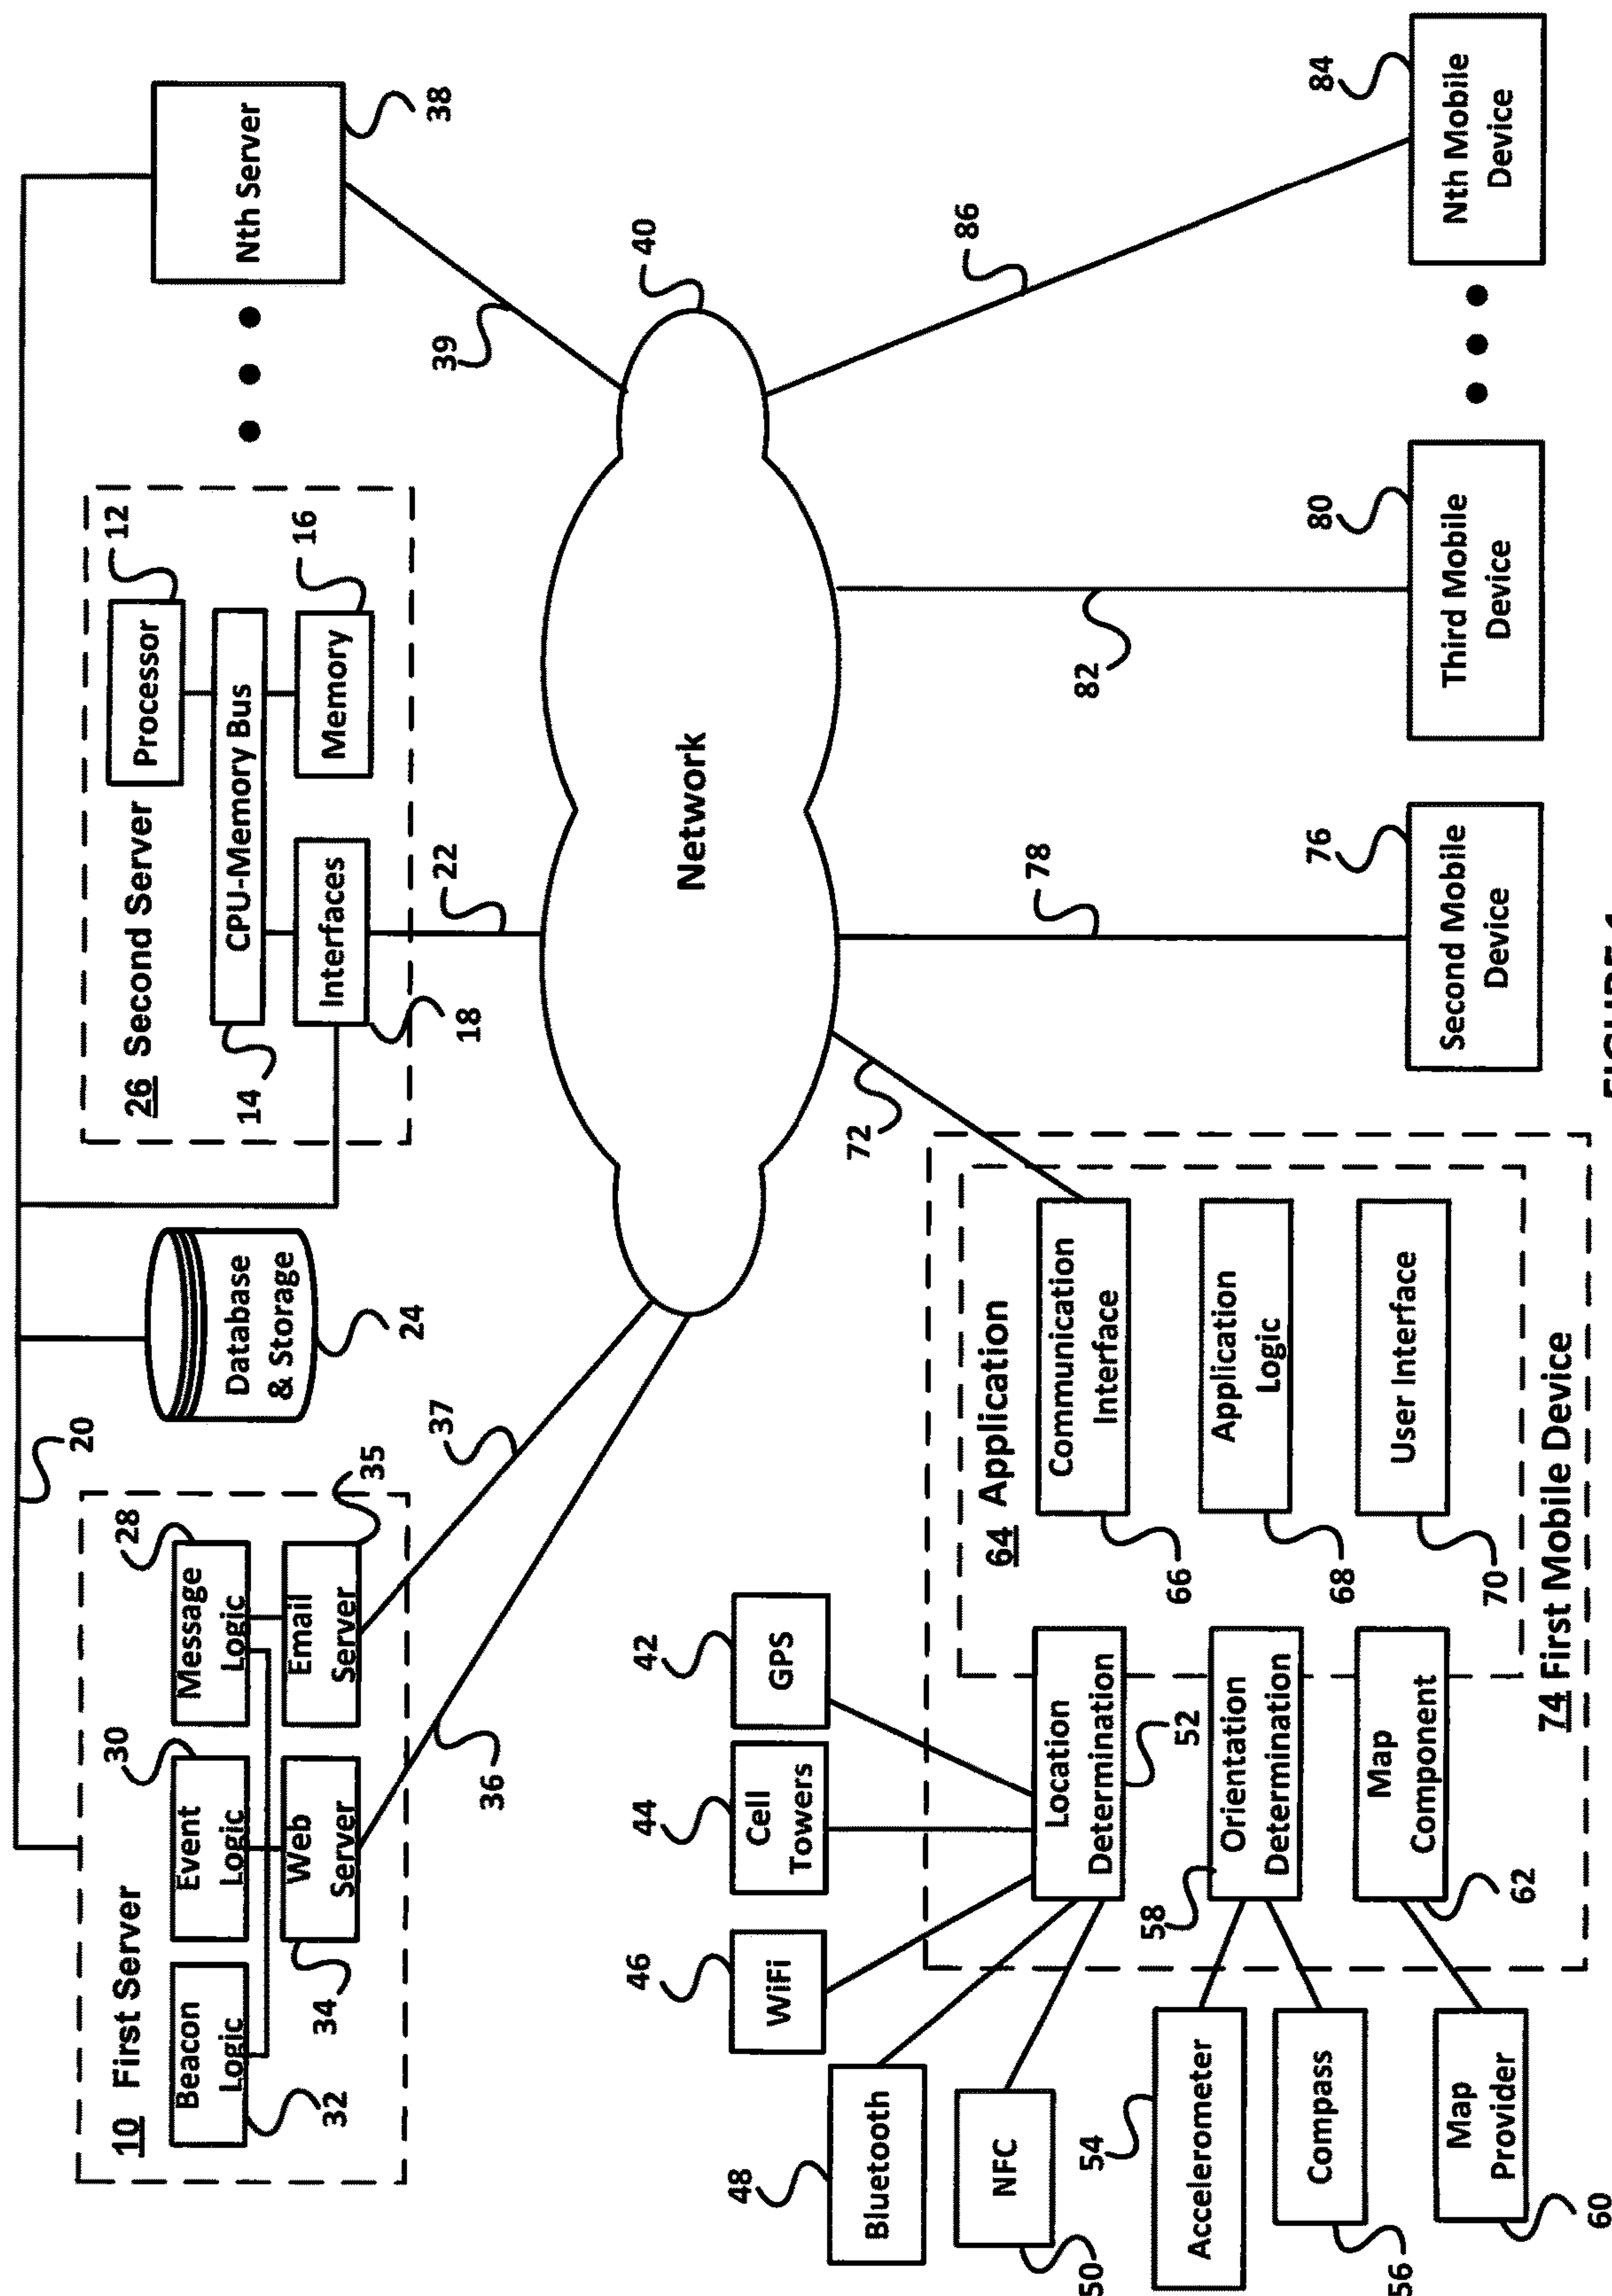


FIGURE 1

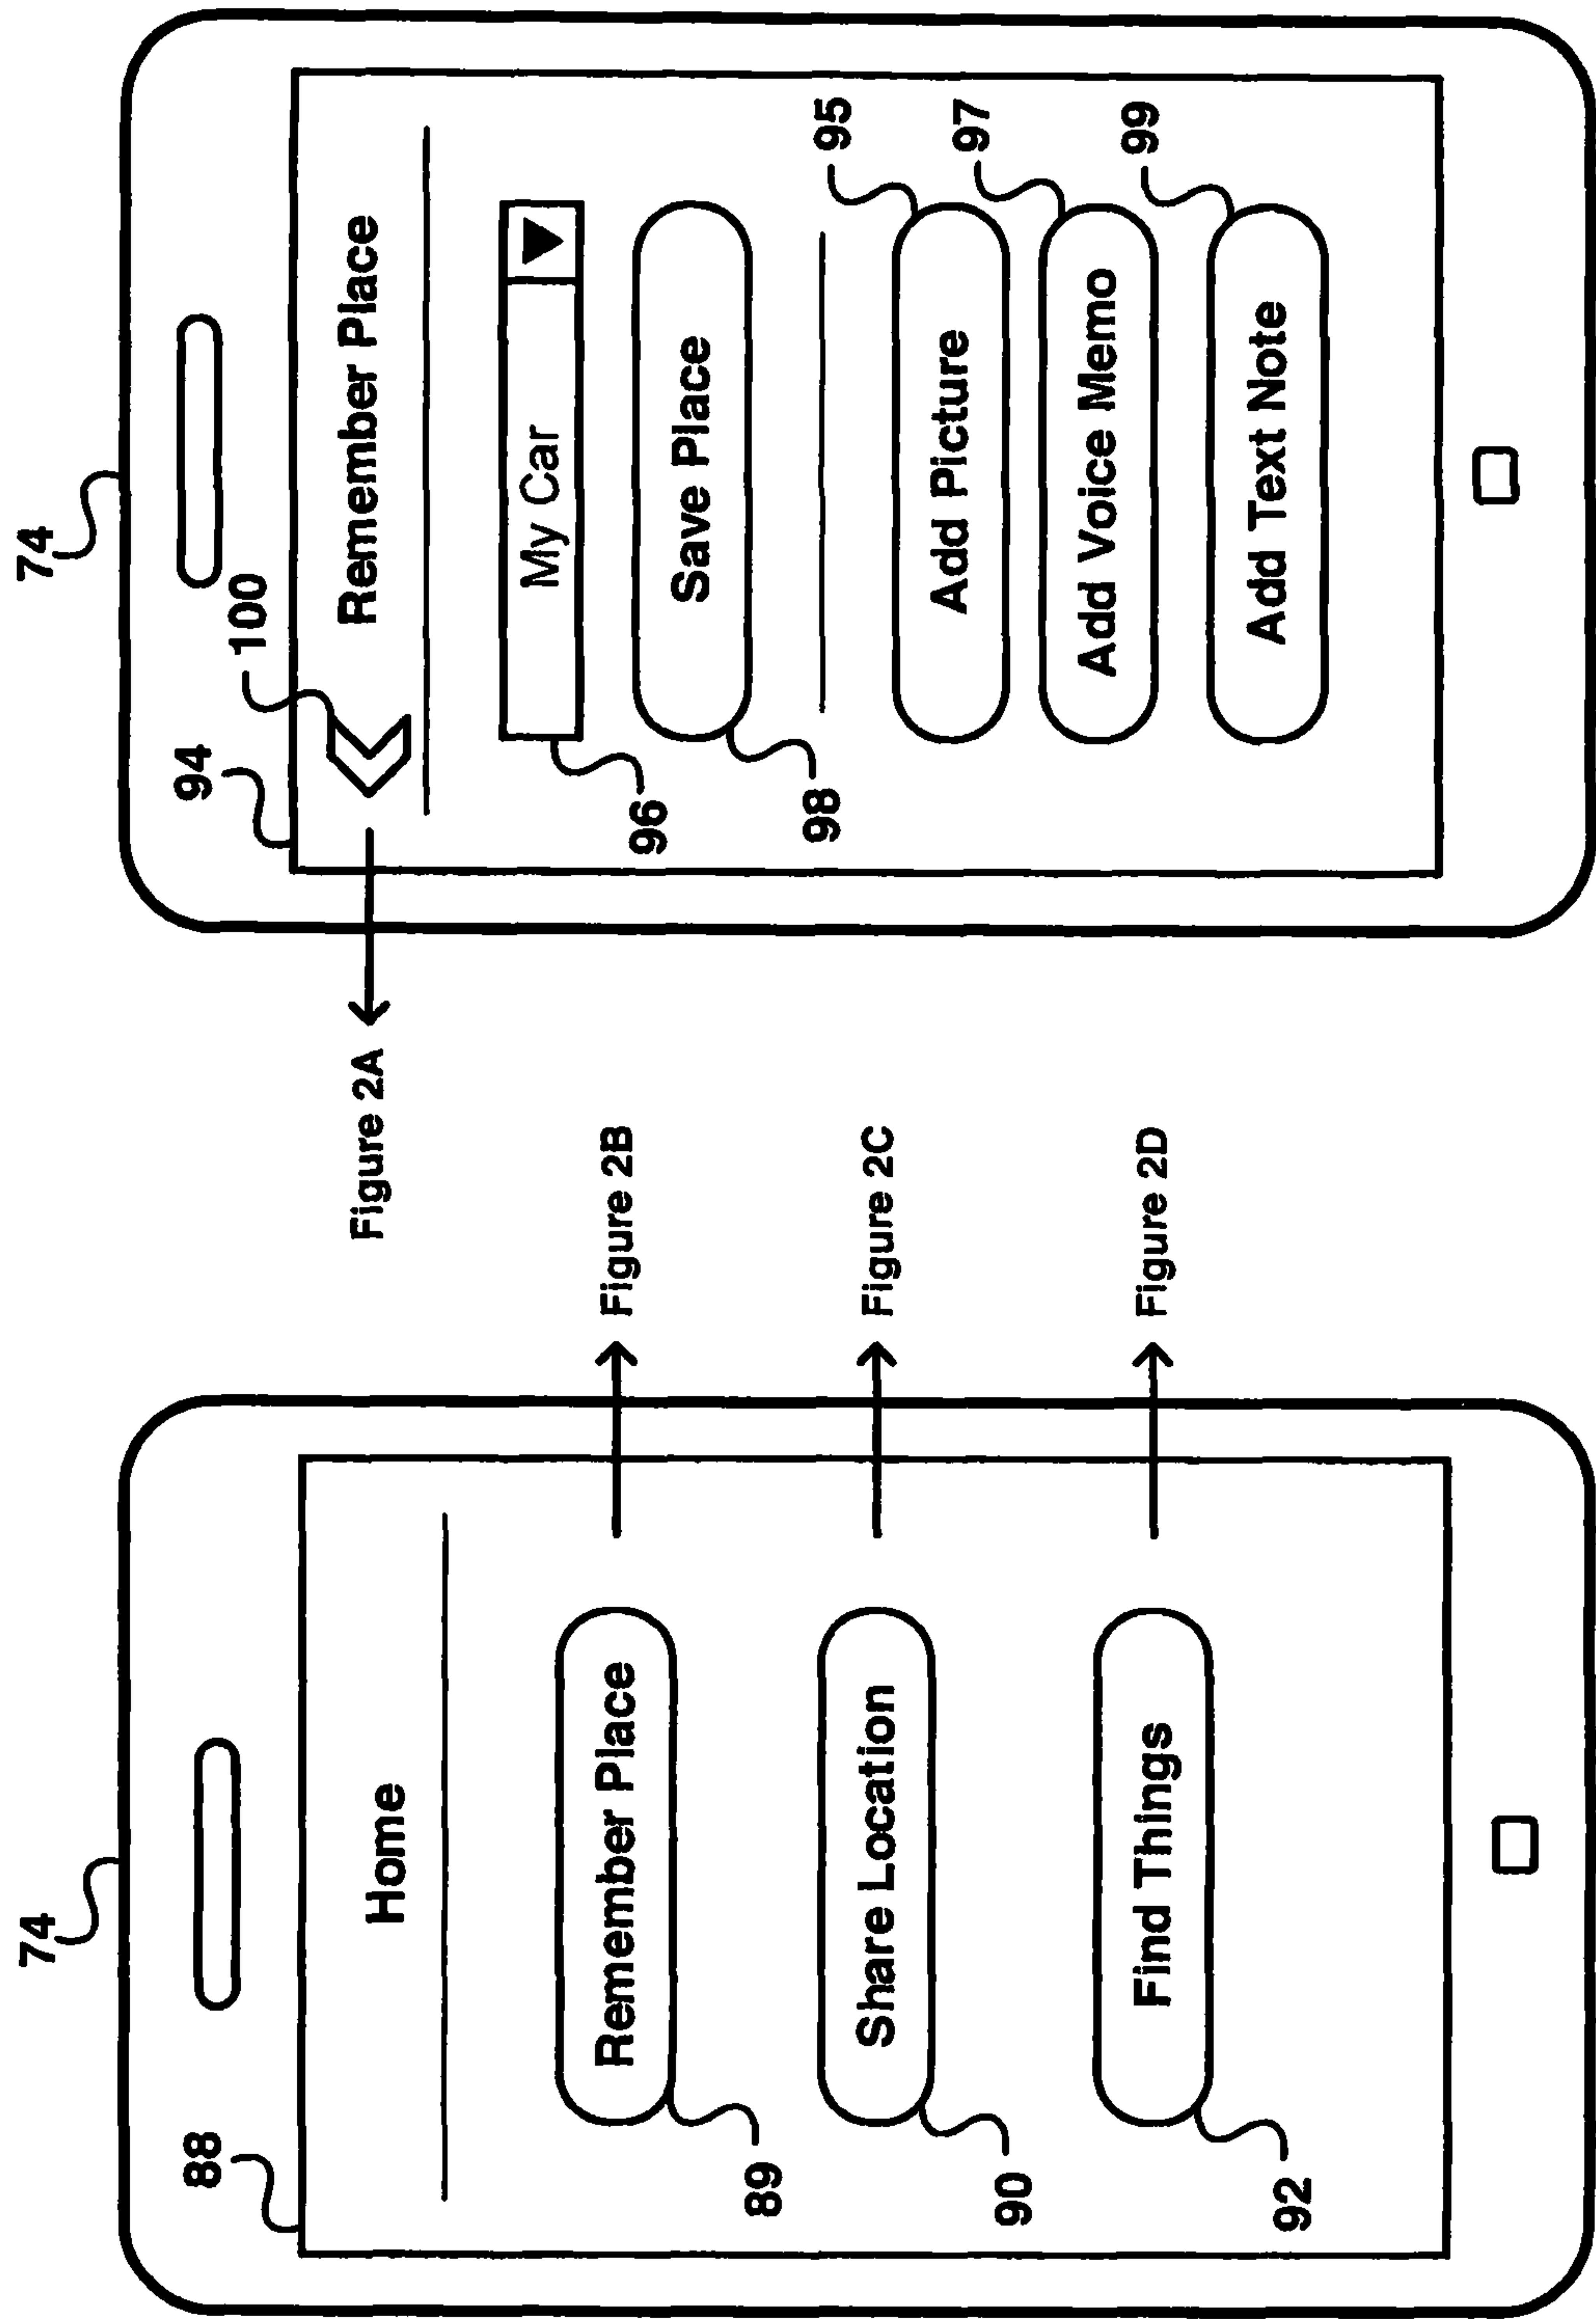


FIGURE 2A

FIGURE 2B

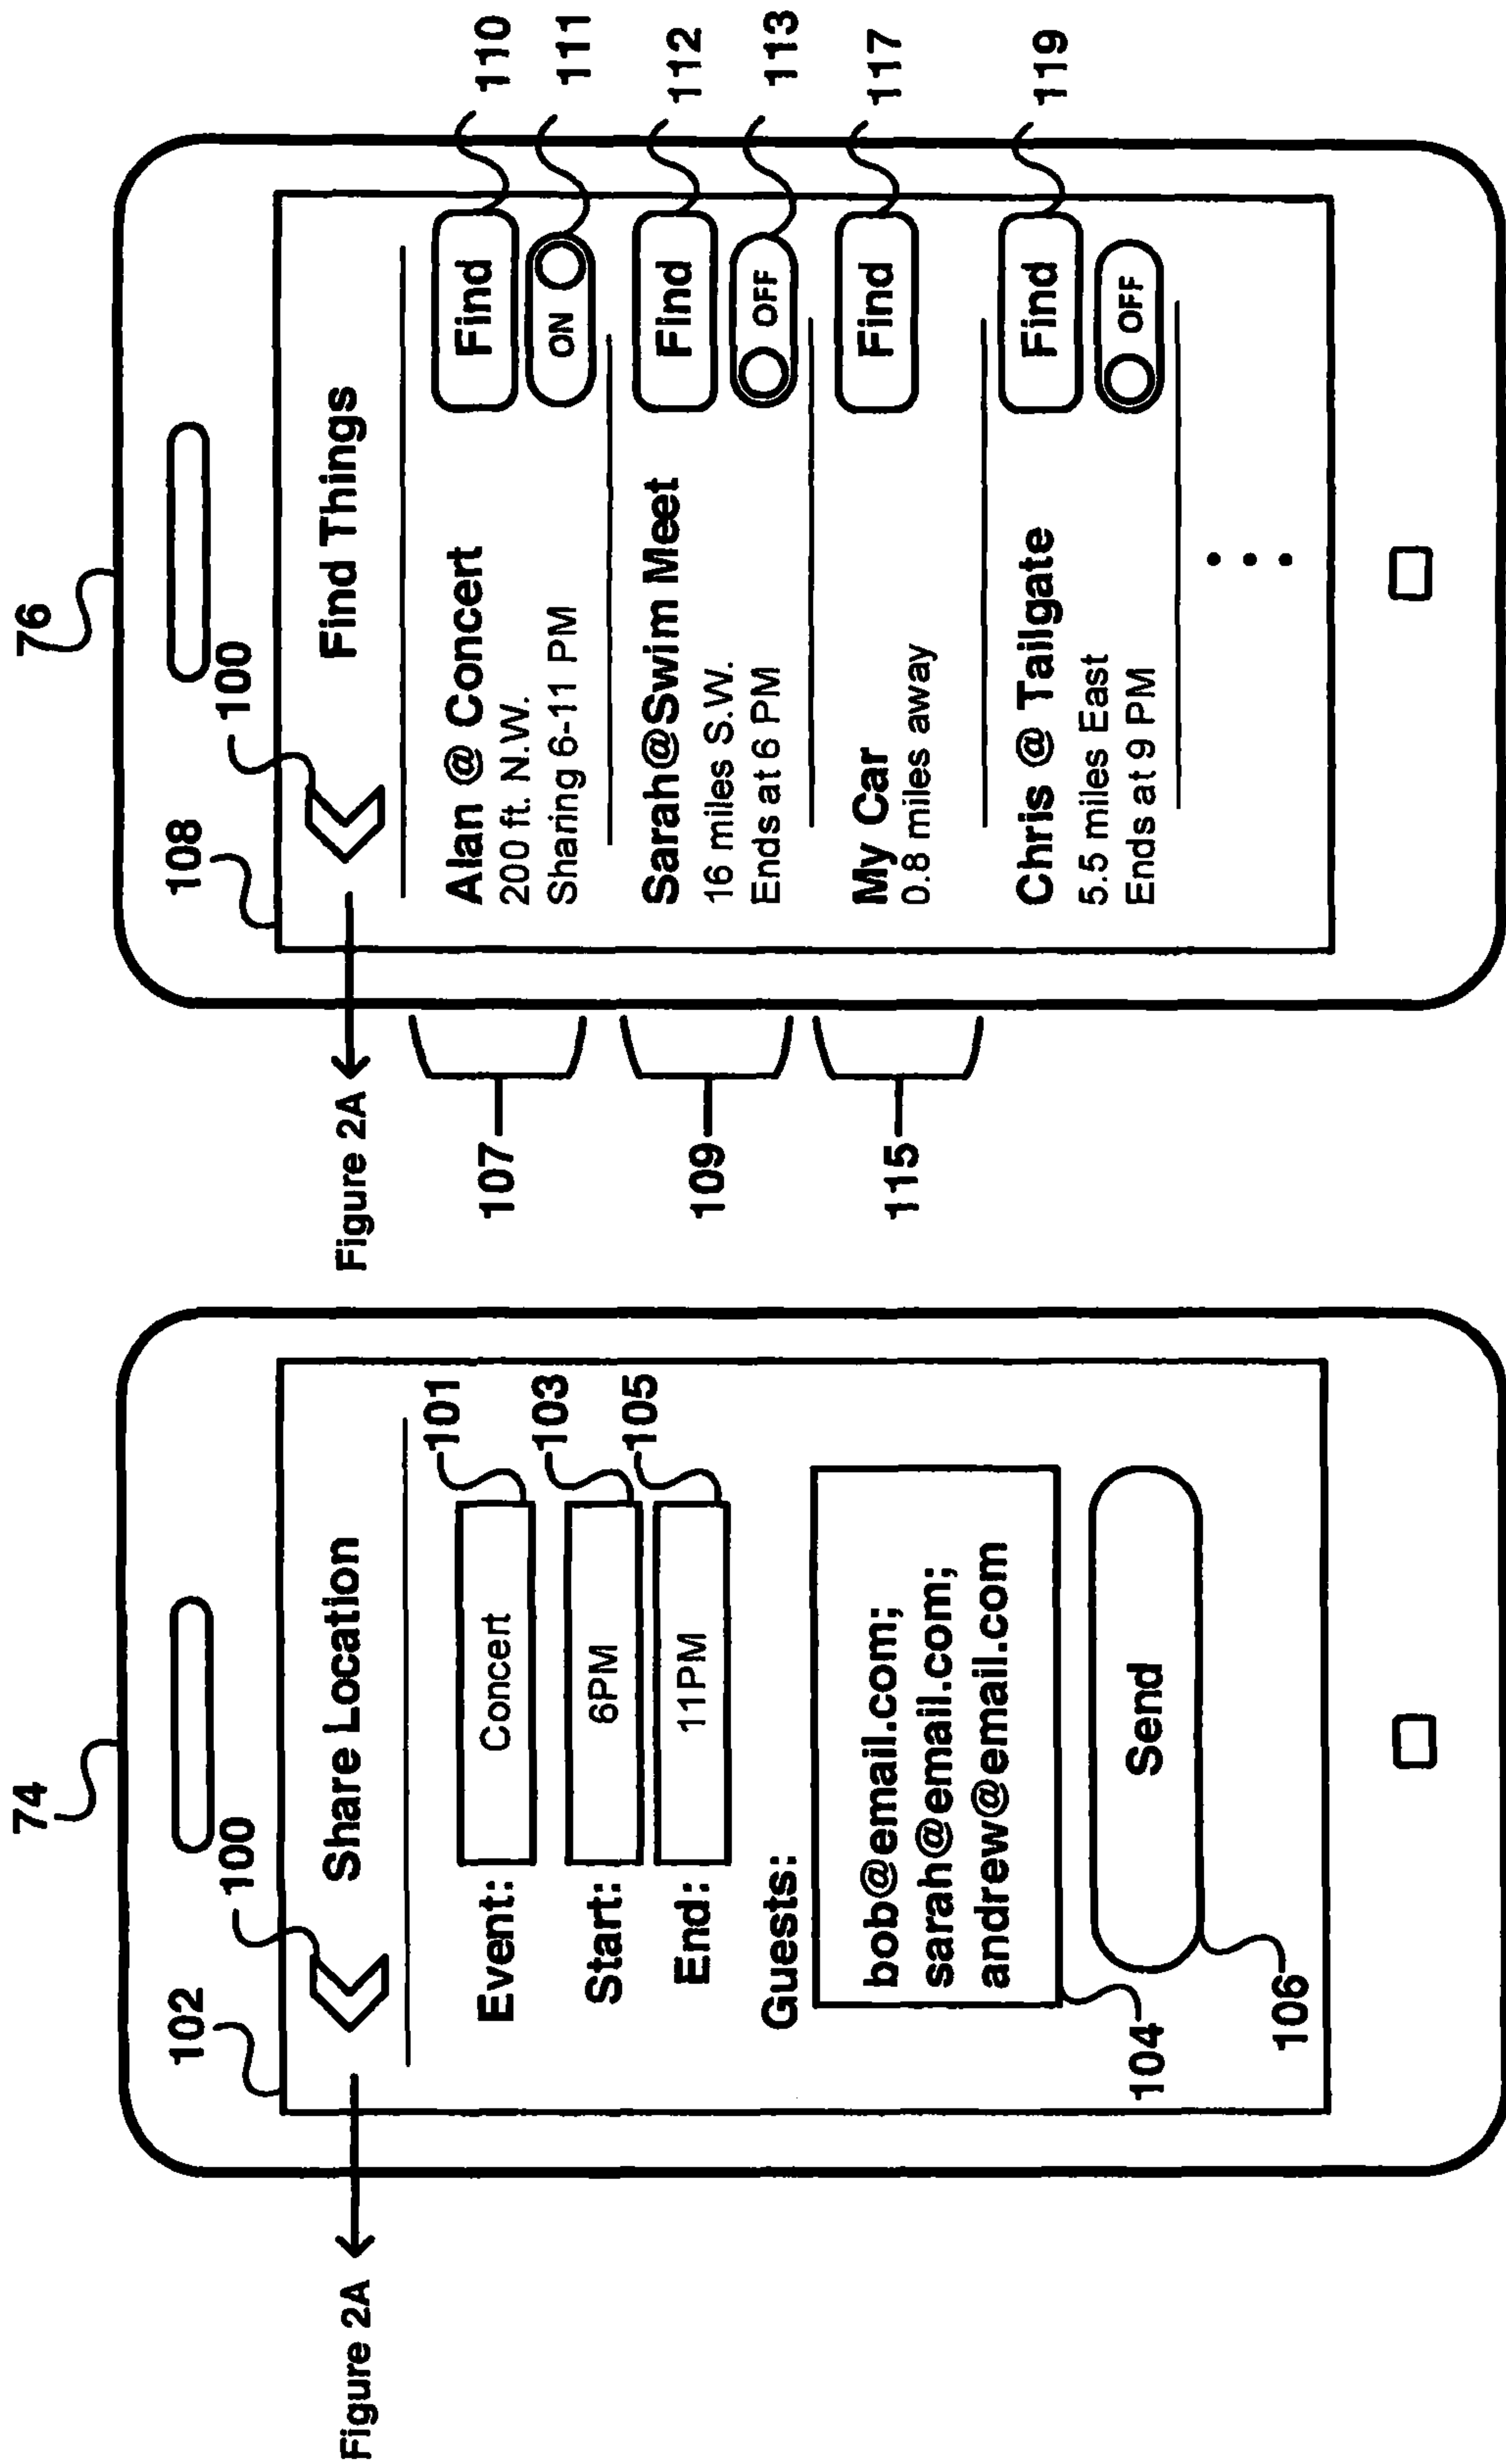


FIGURE 2D

FIGURE 2C

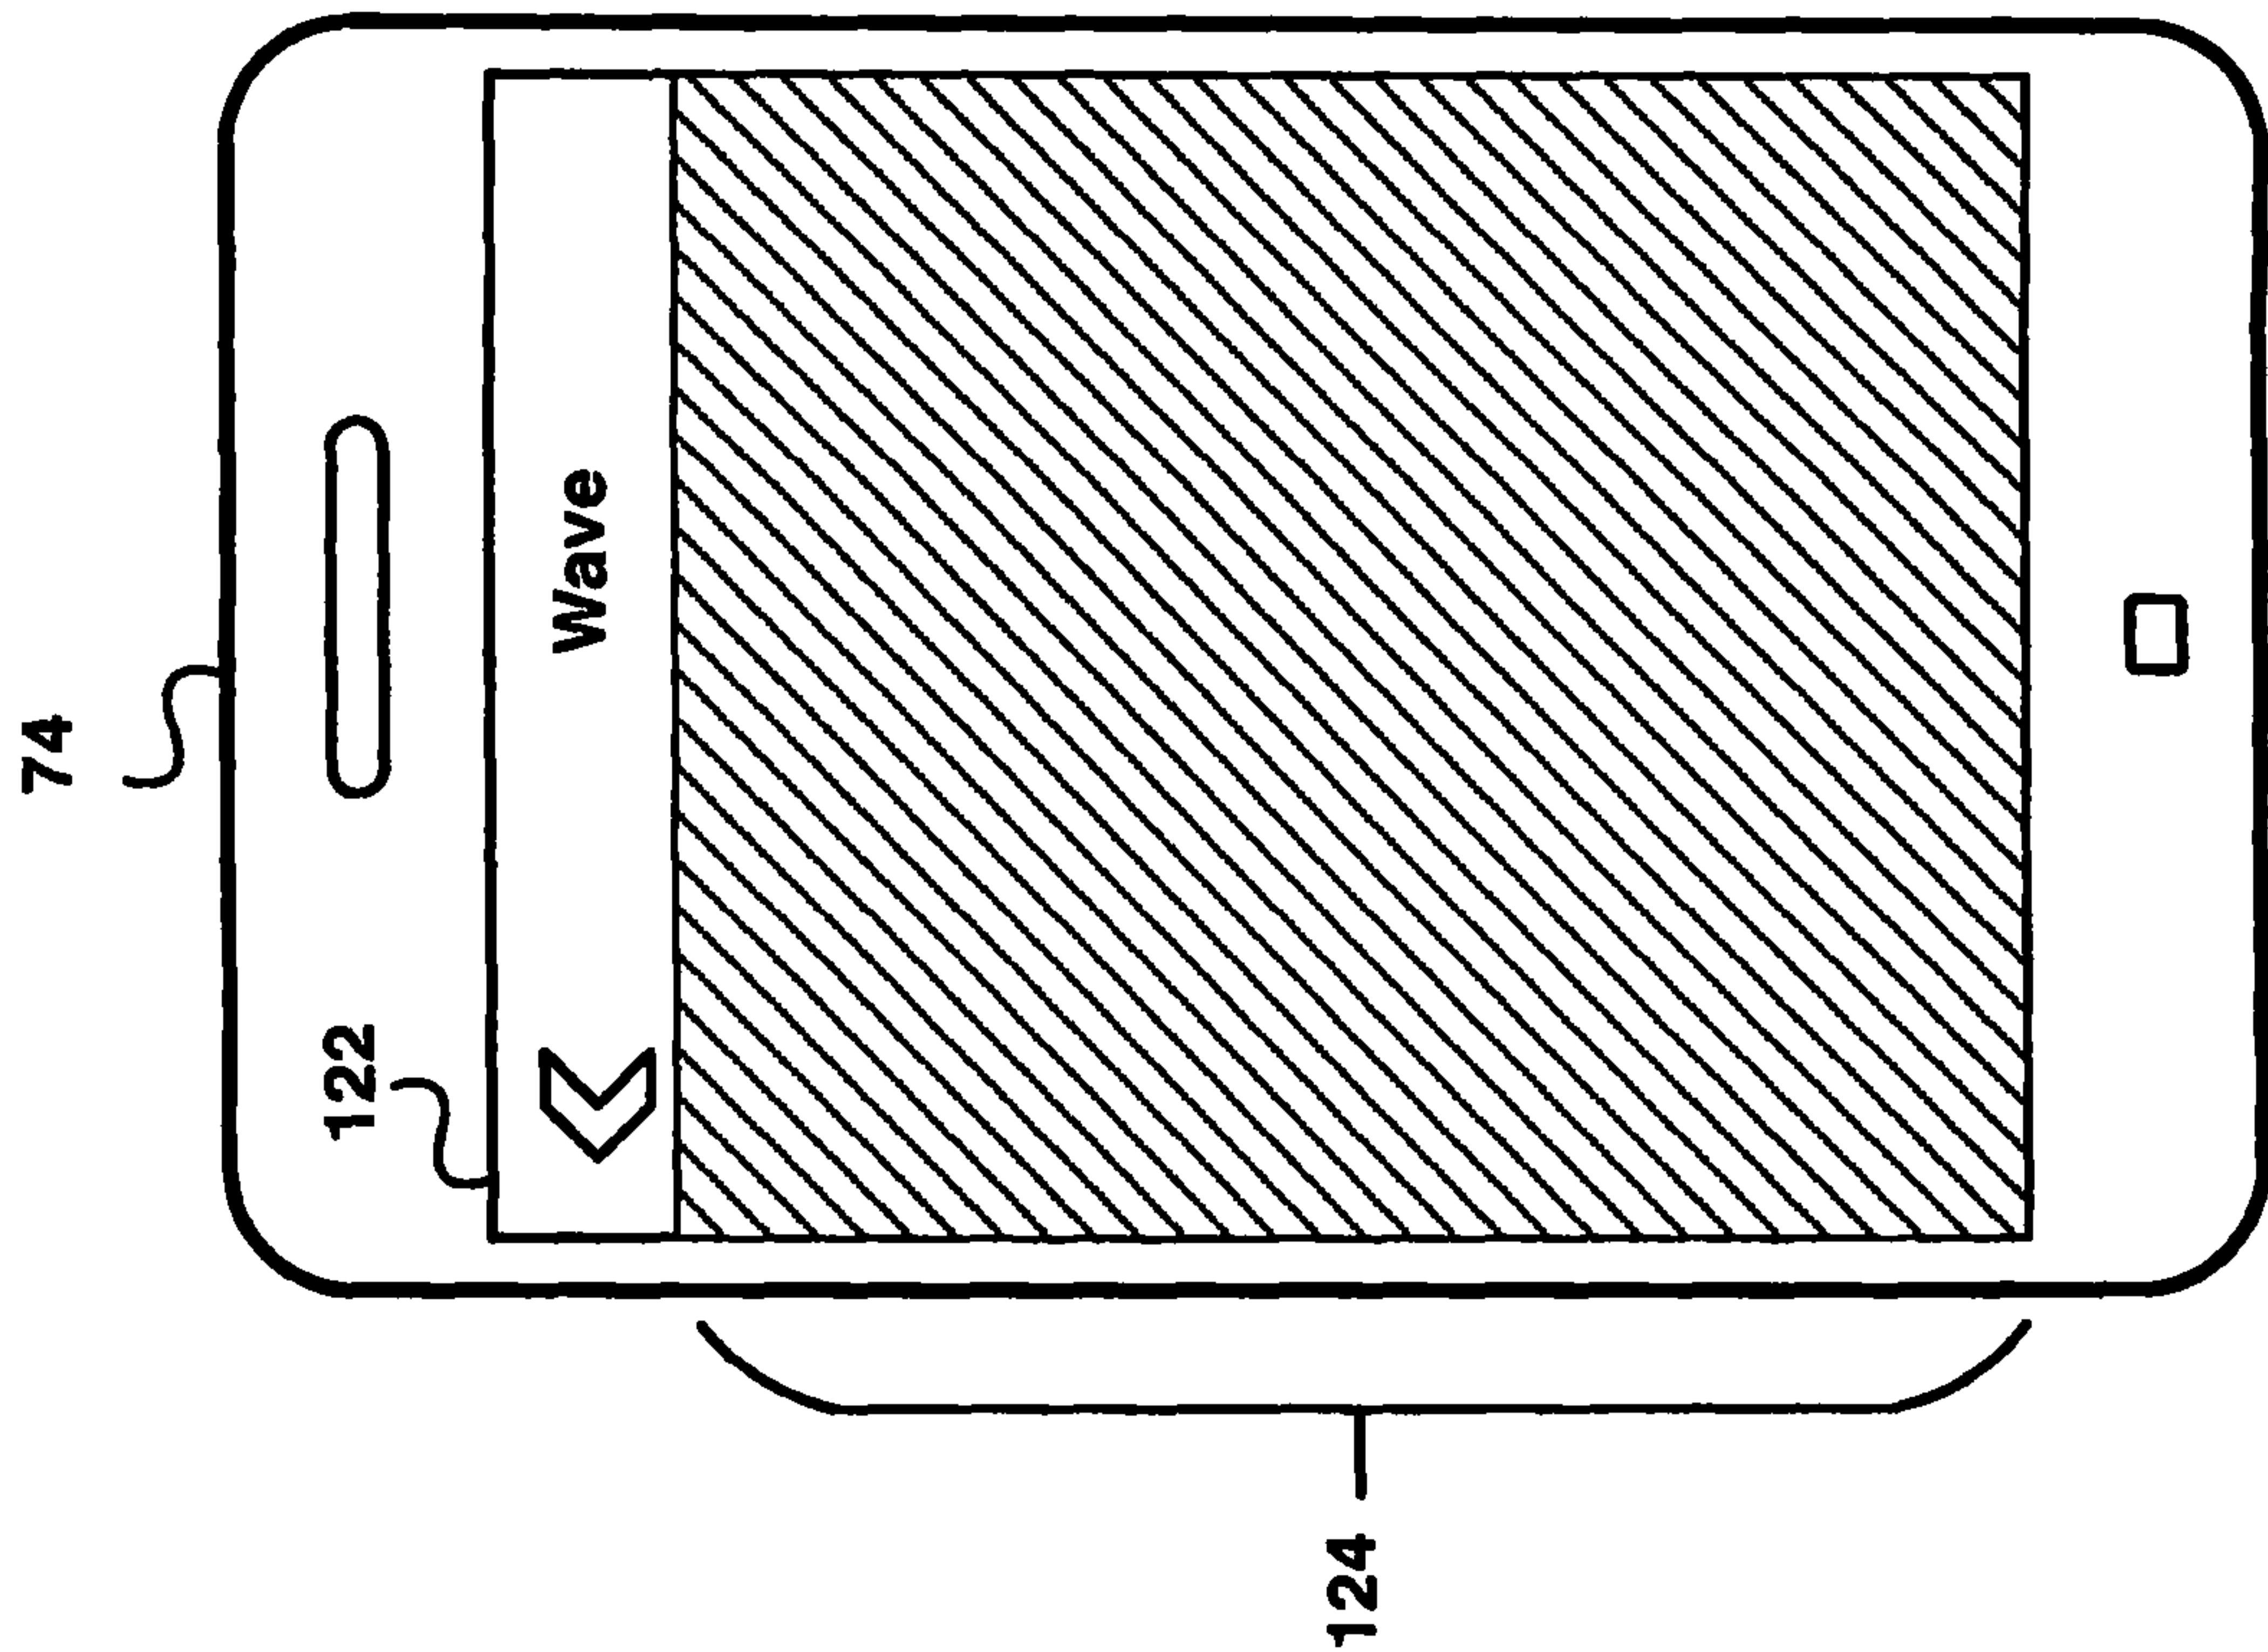


FIGURE 2F

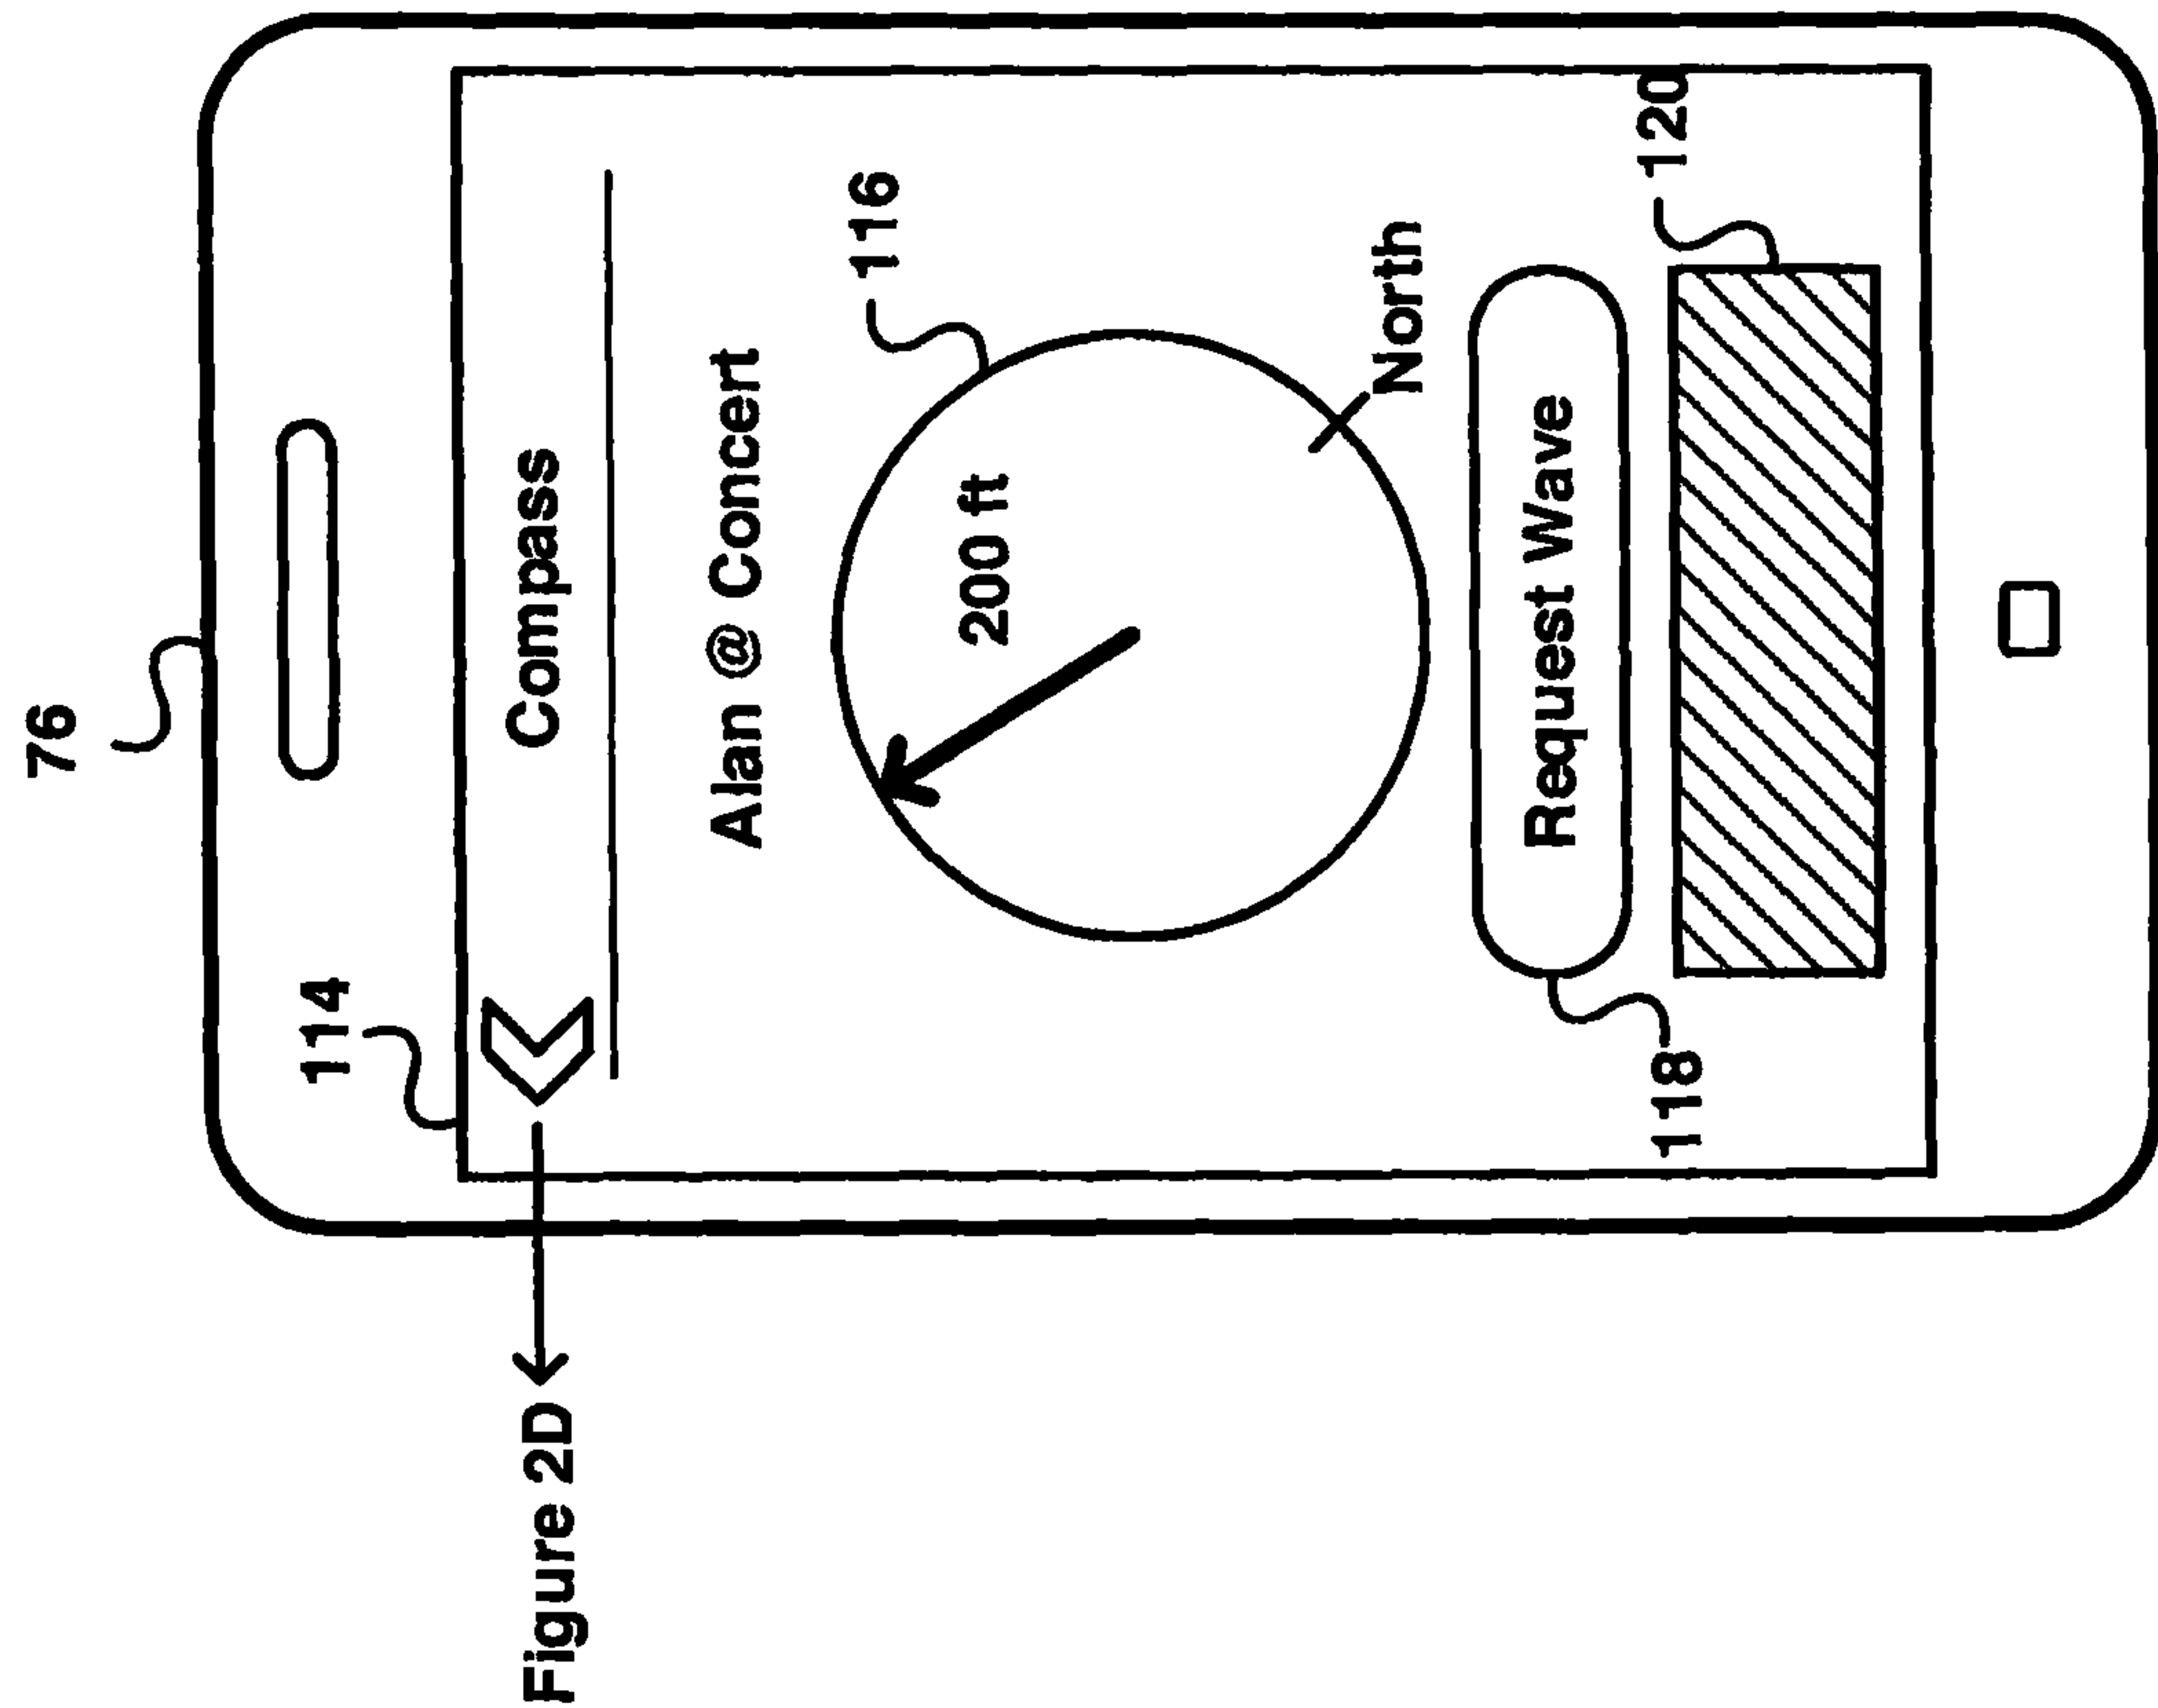


FIGURE 2E

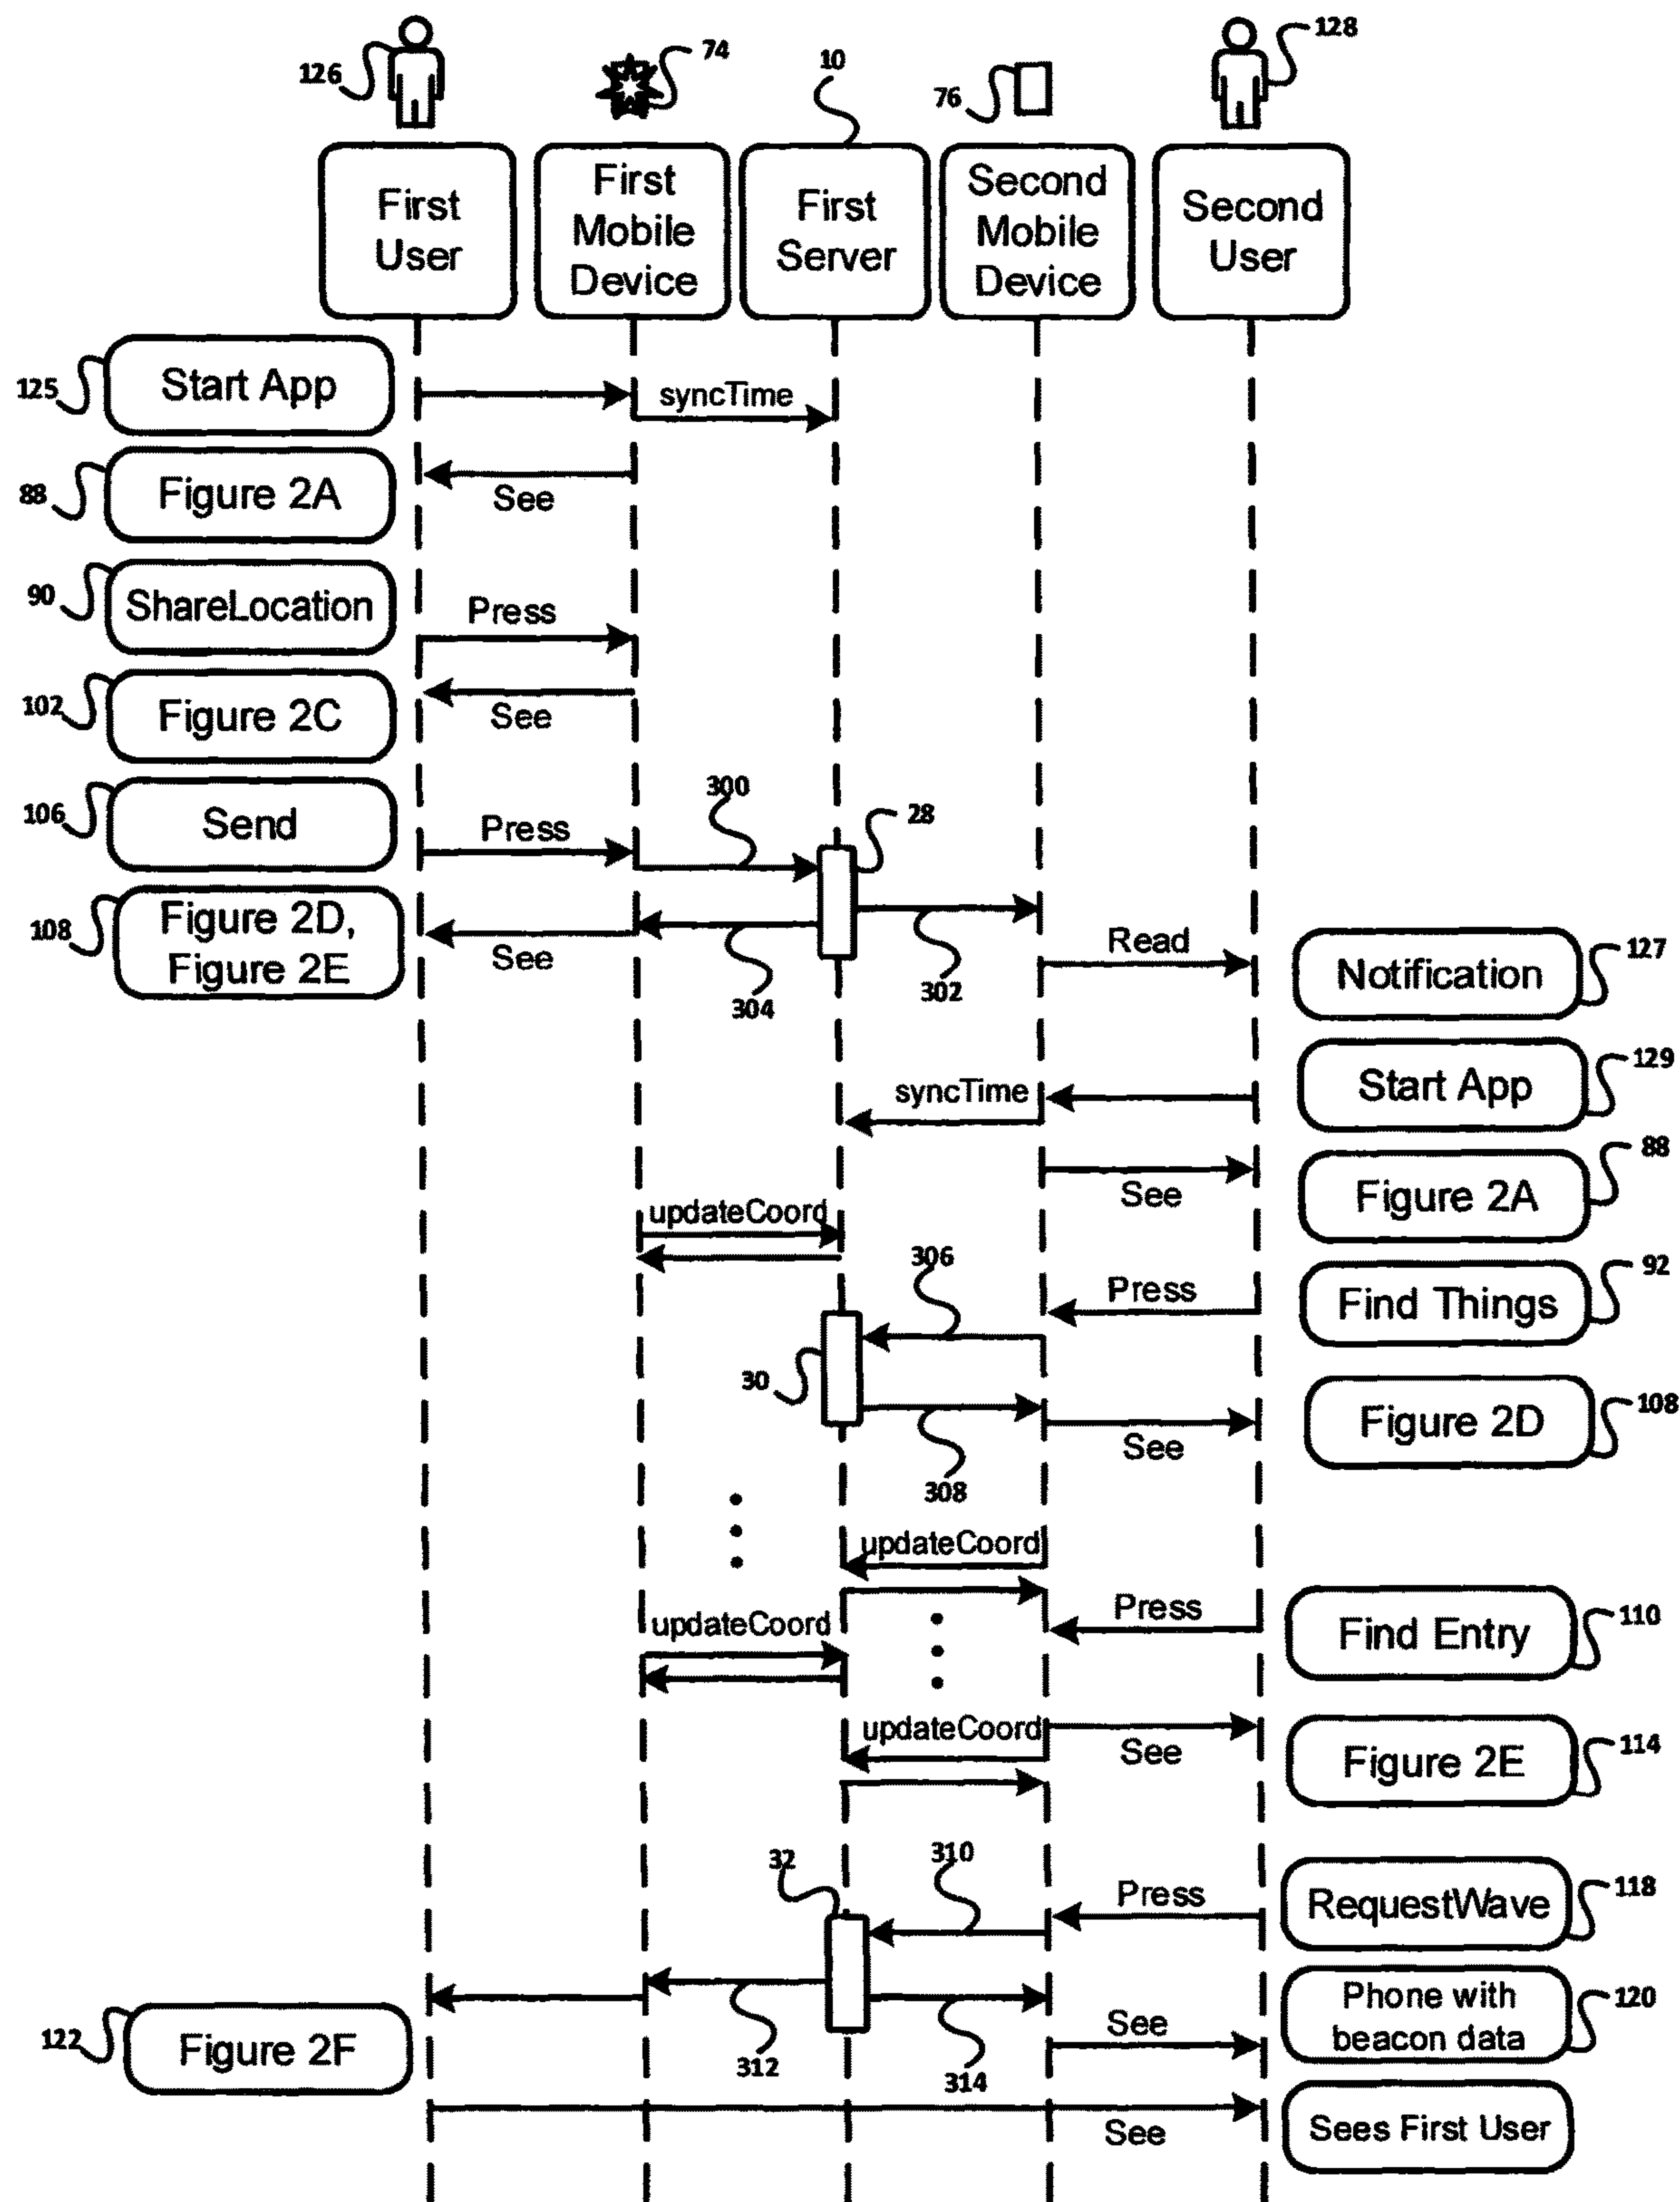


FIGURE 3

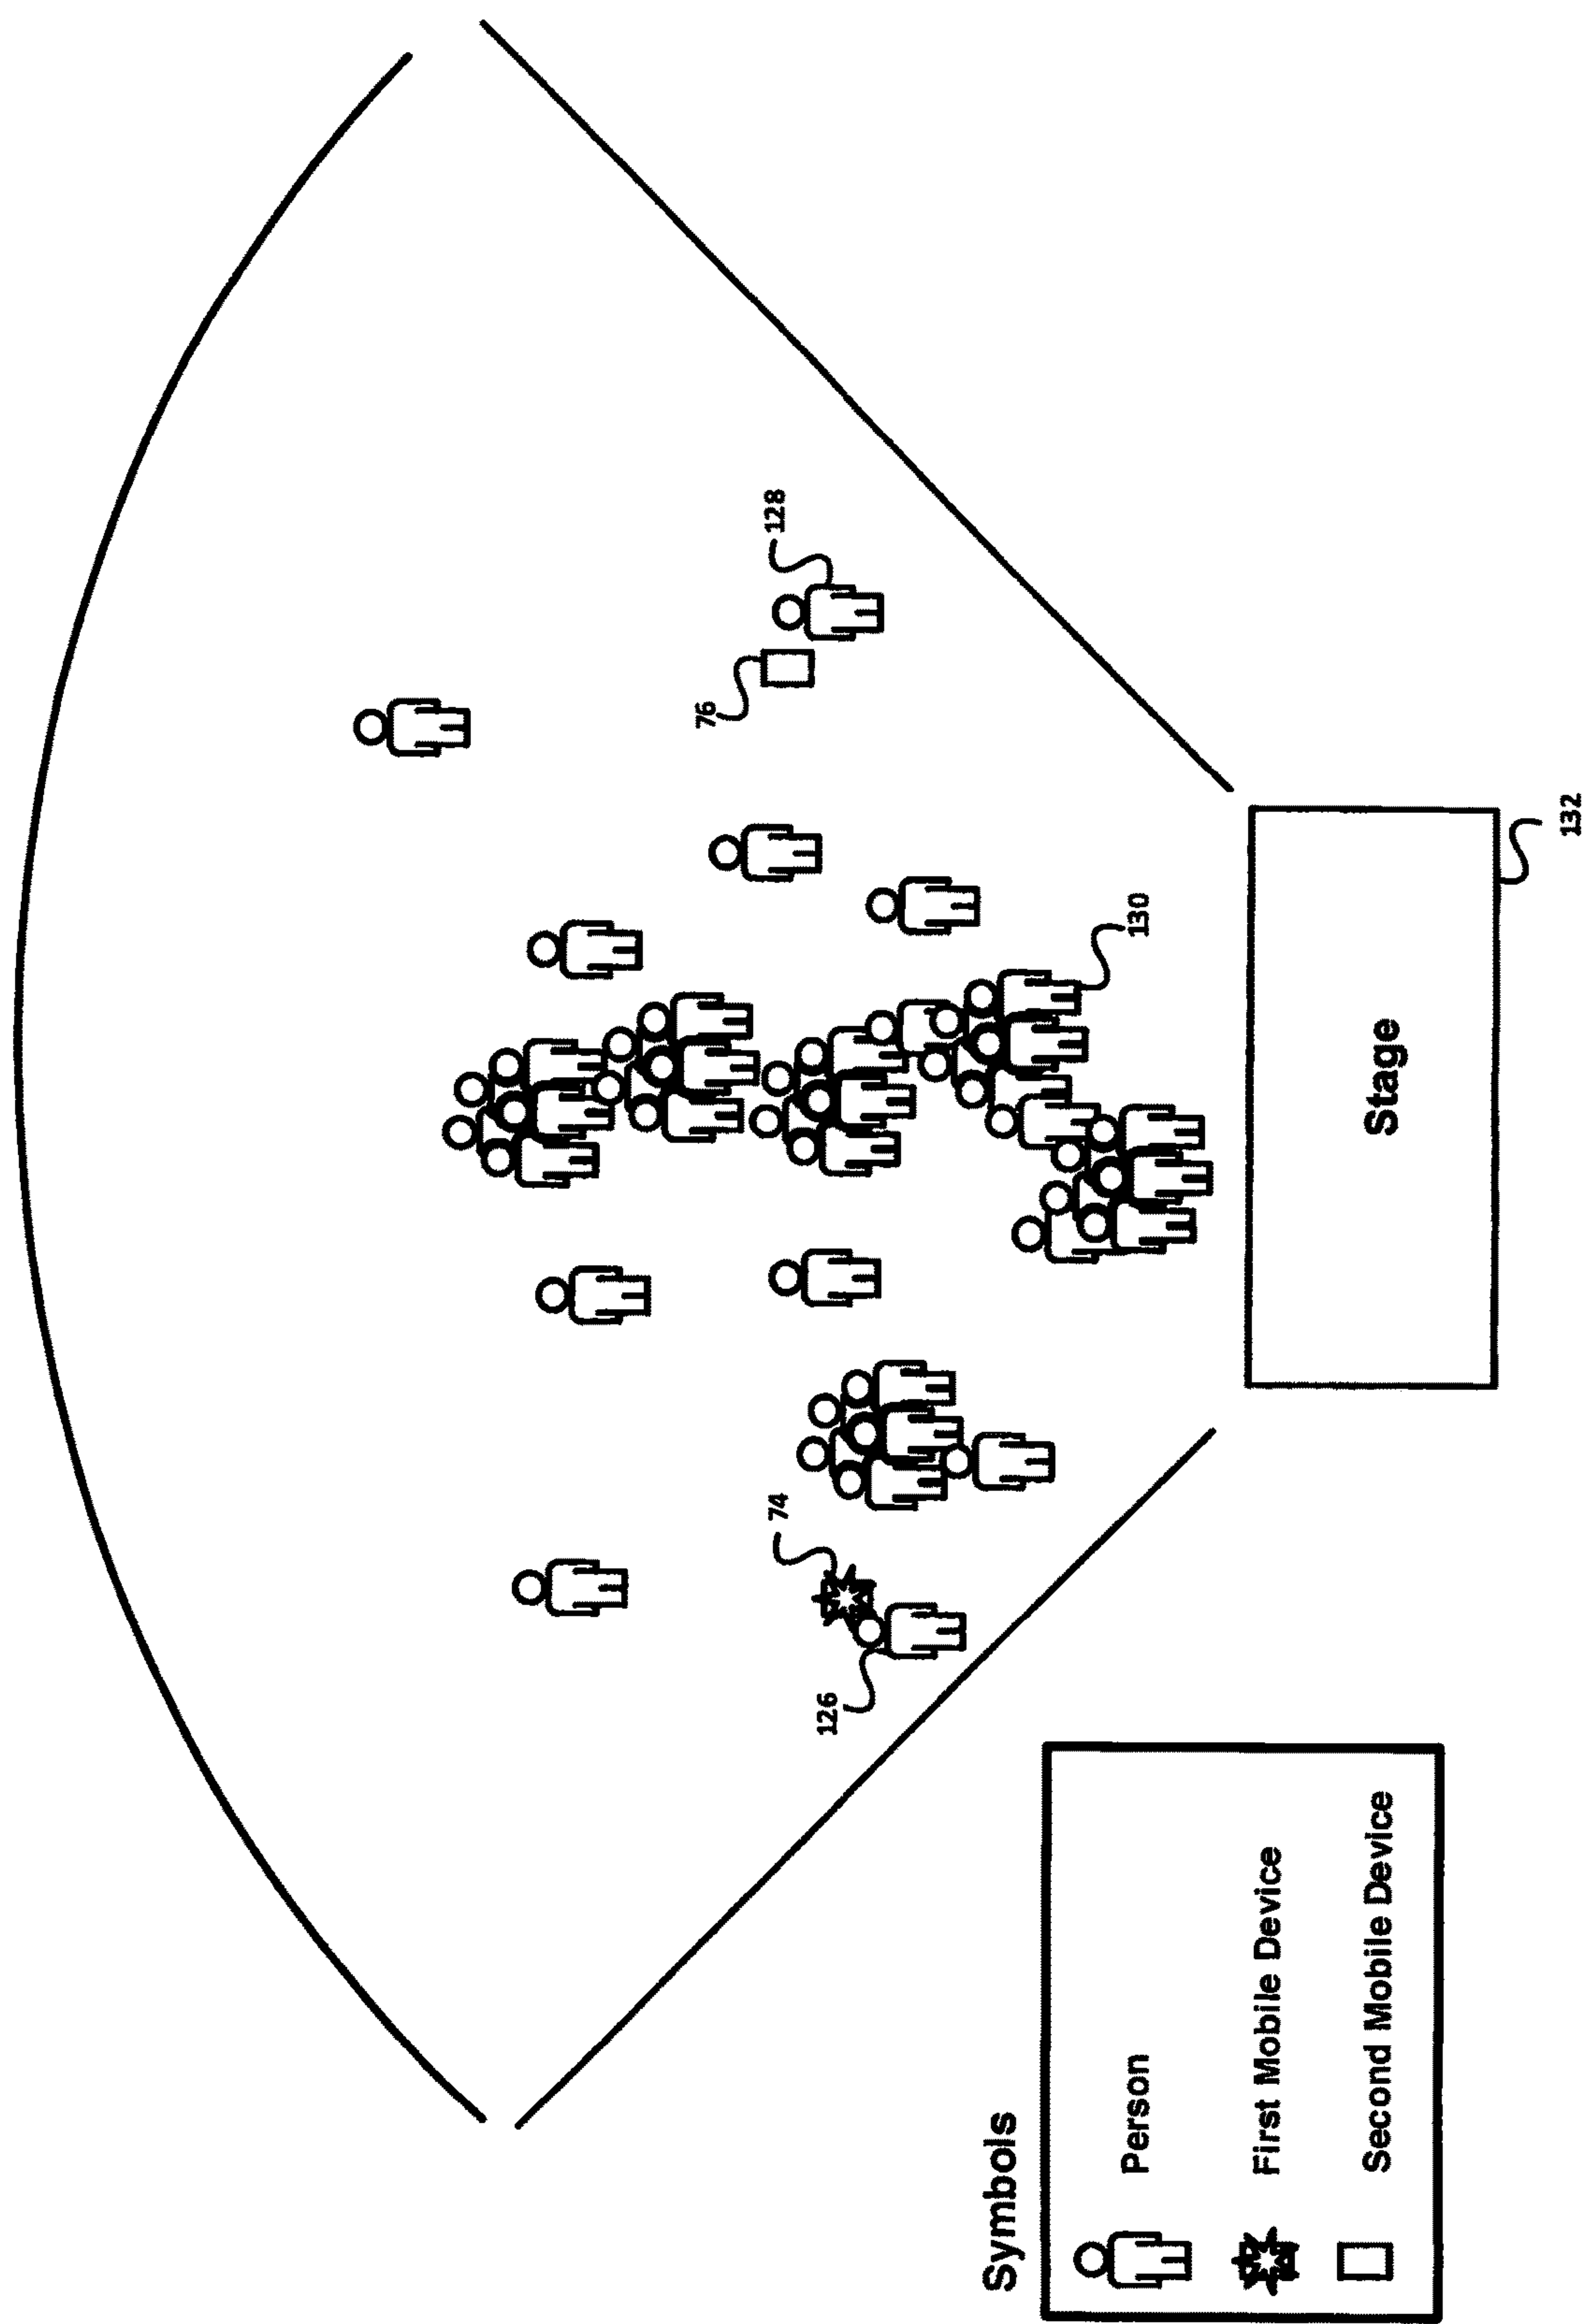


FIGURE 4

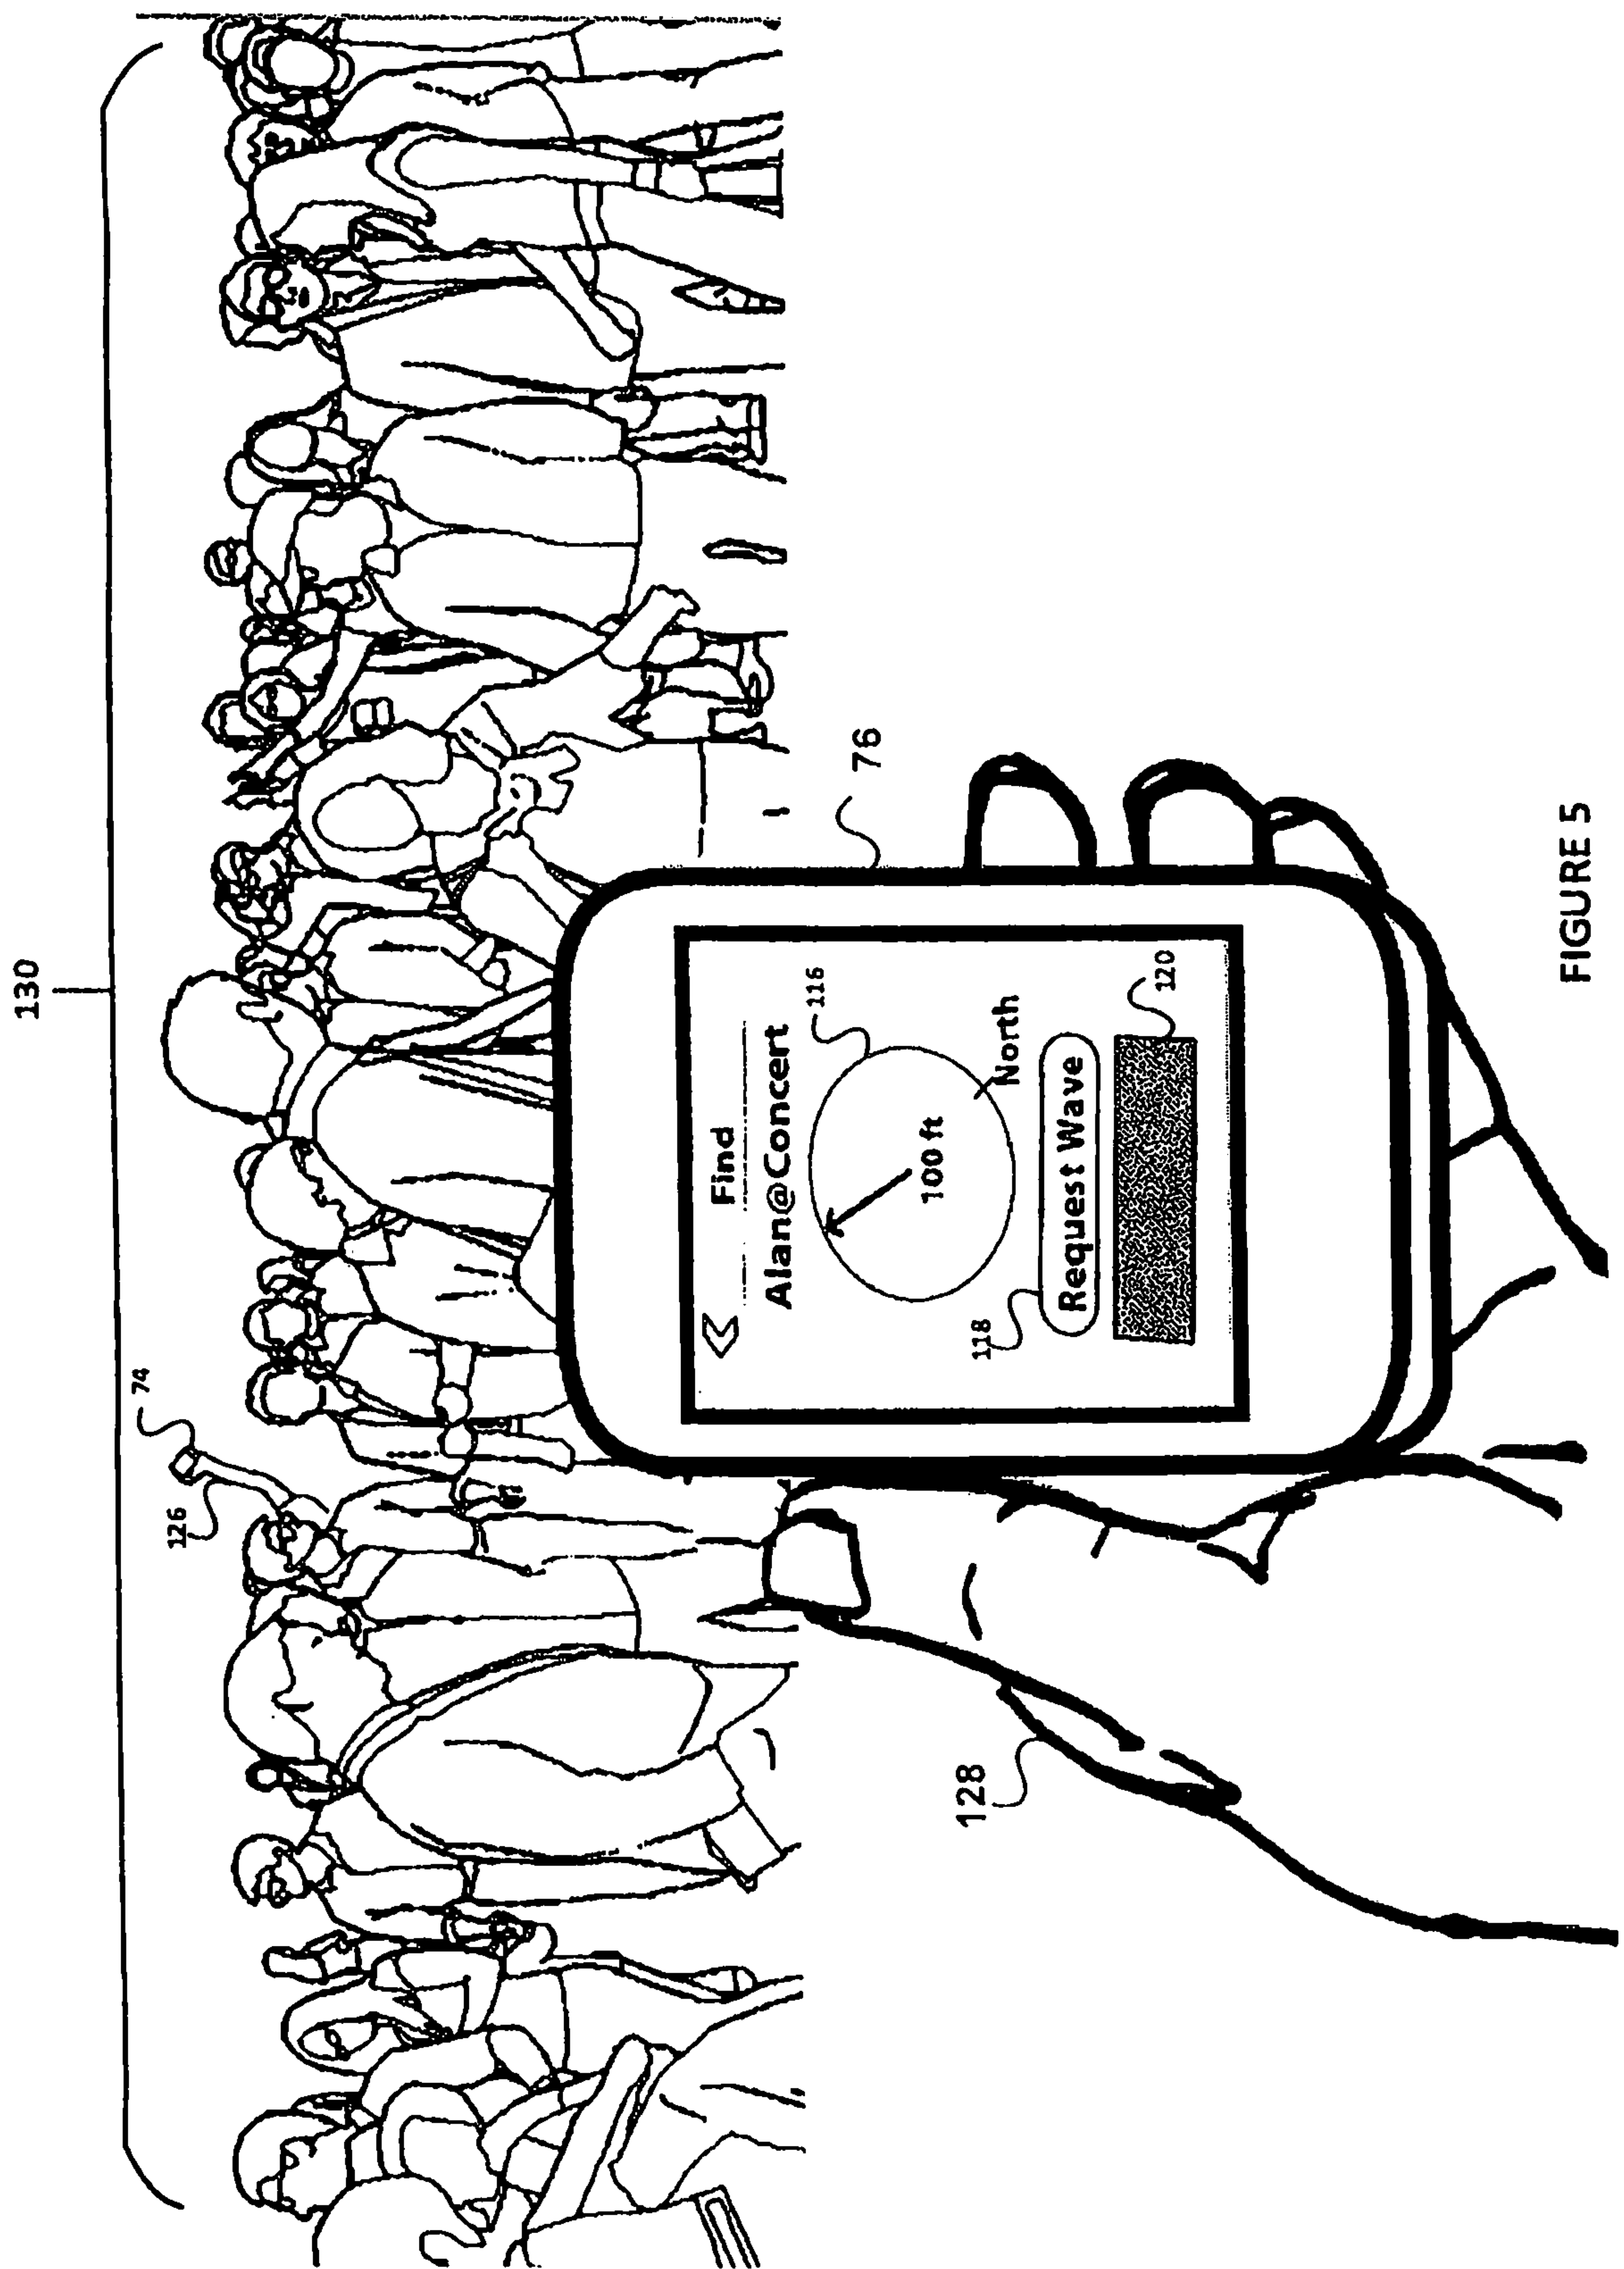


FIGURE 5

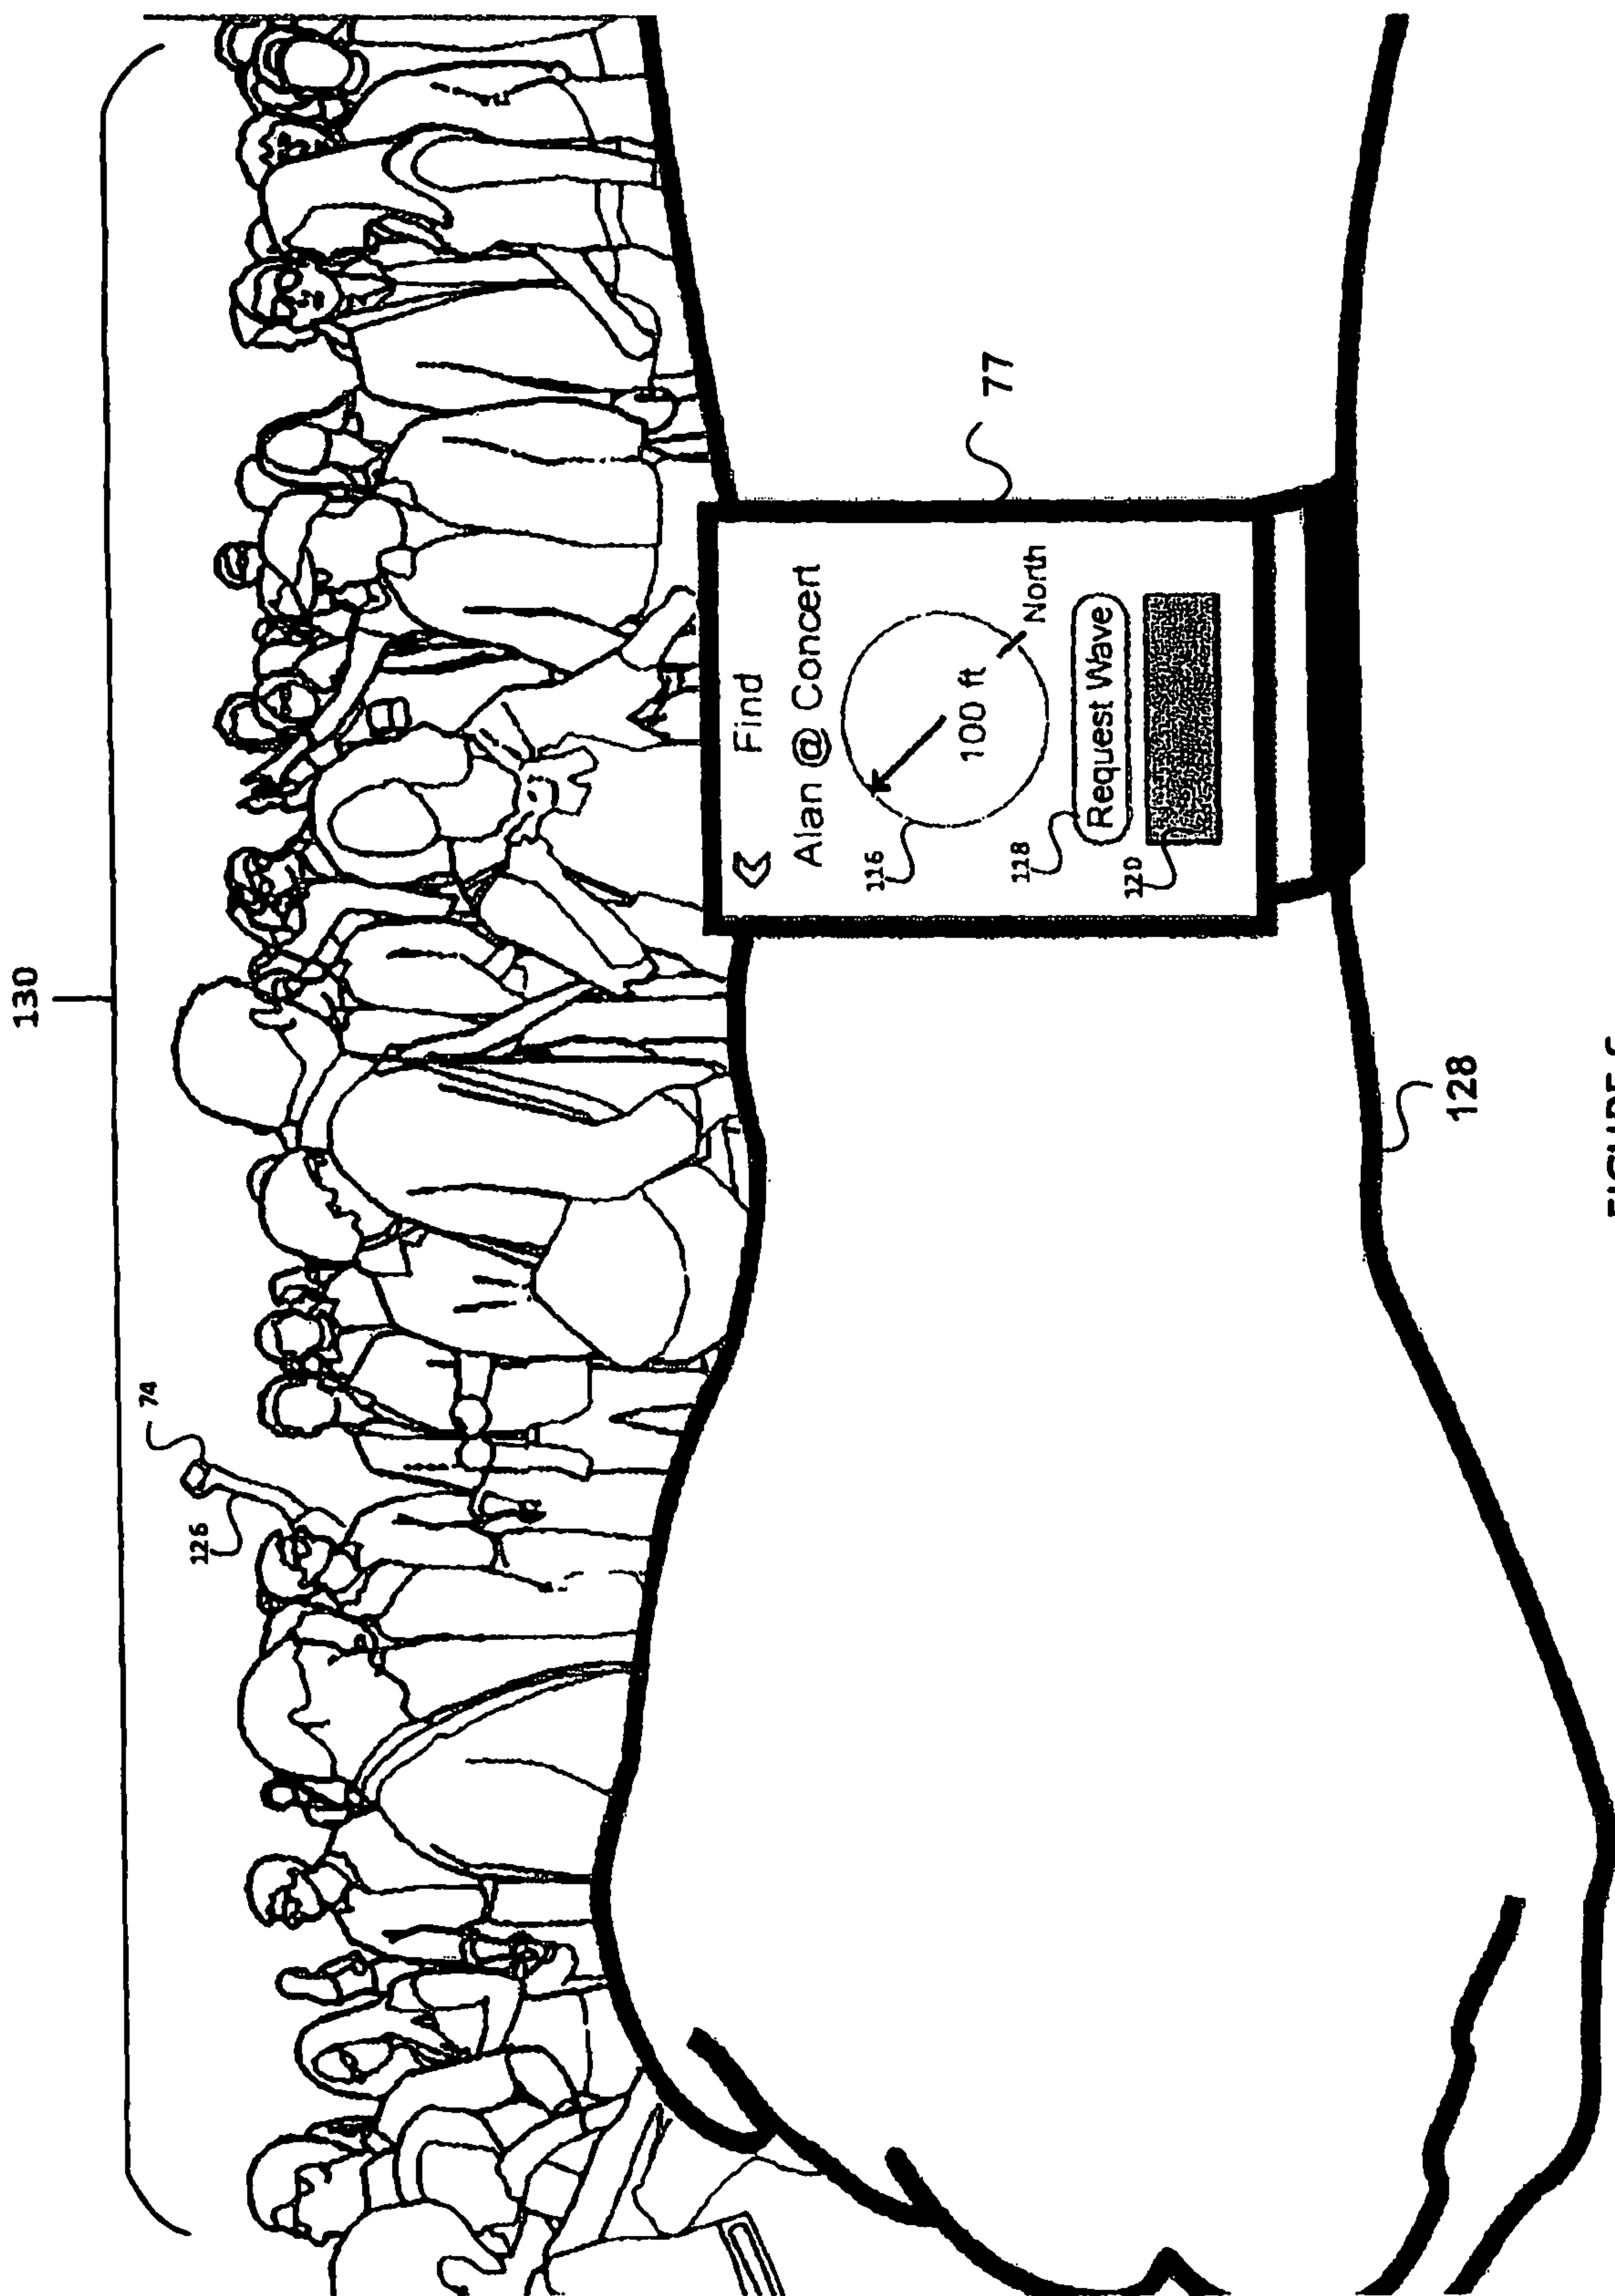


FIGURE 6

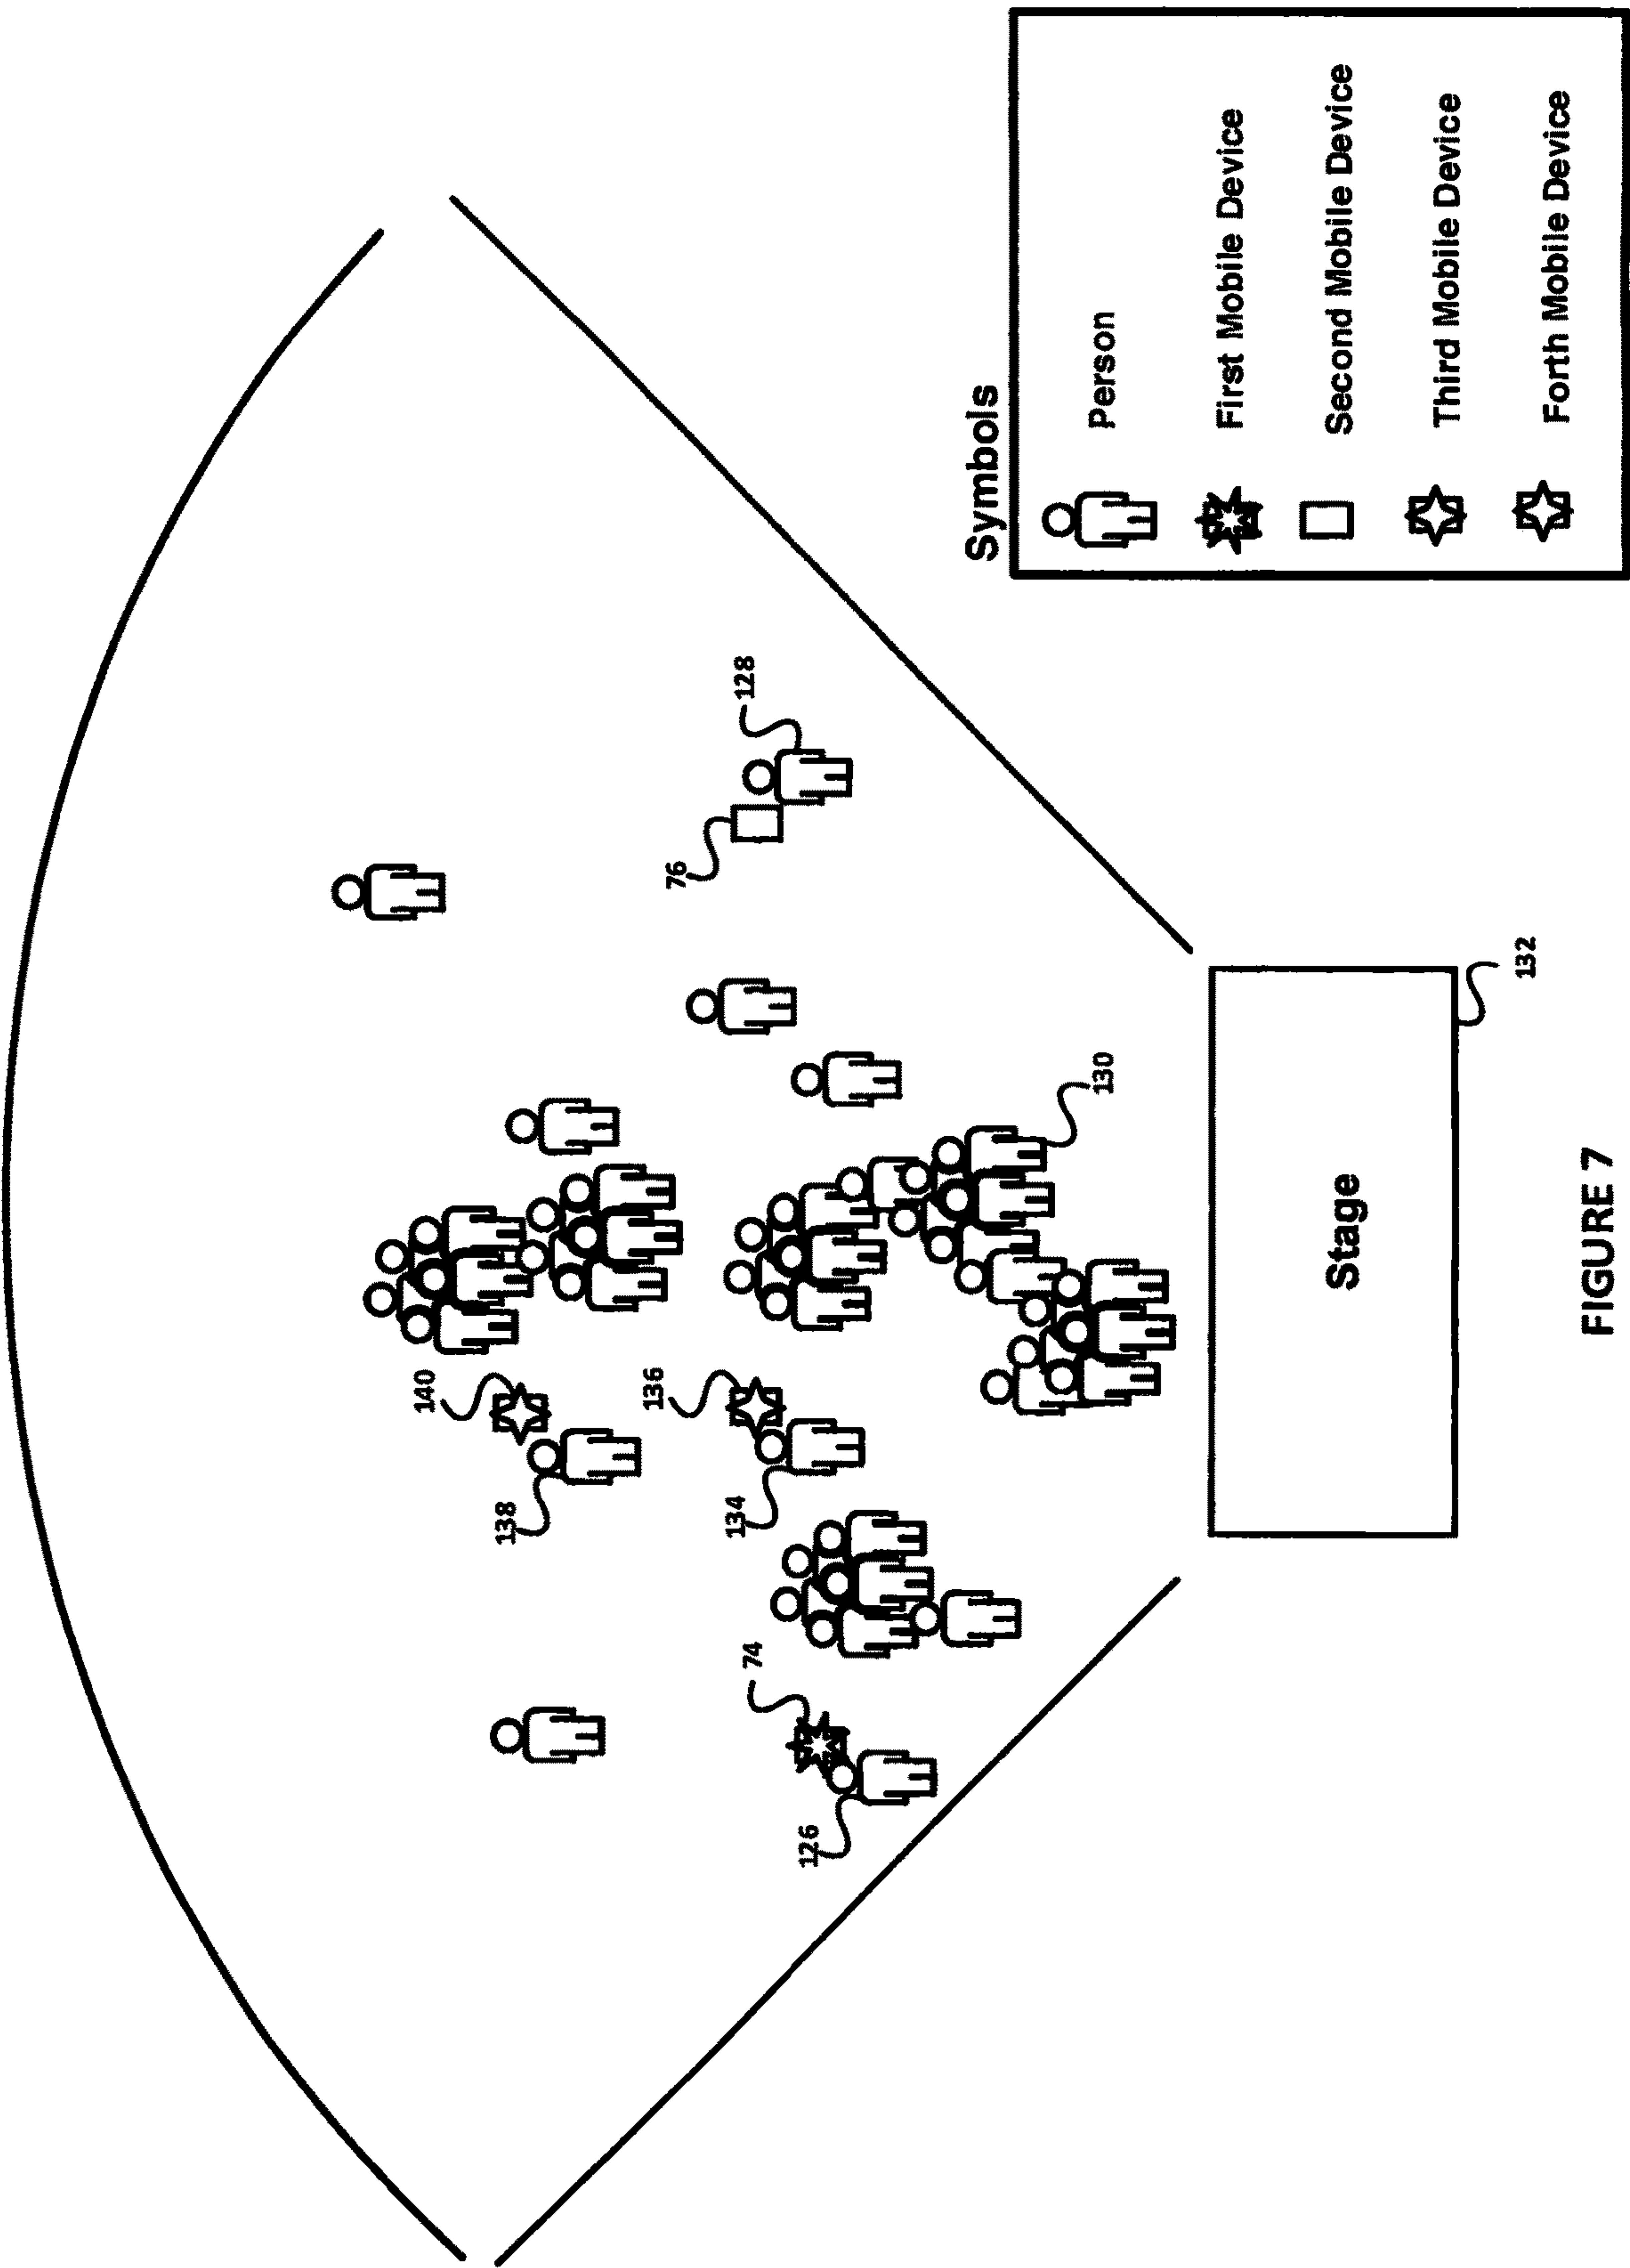


FIGURE 7

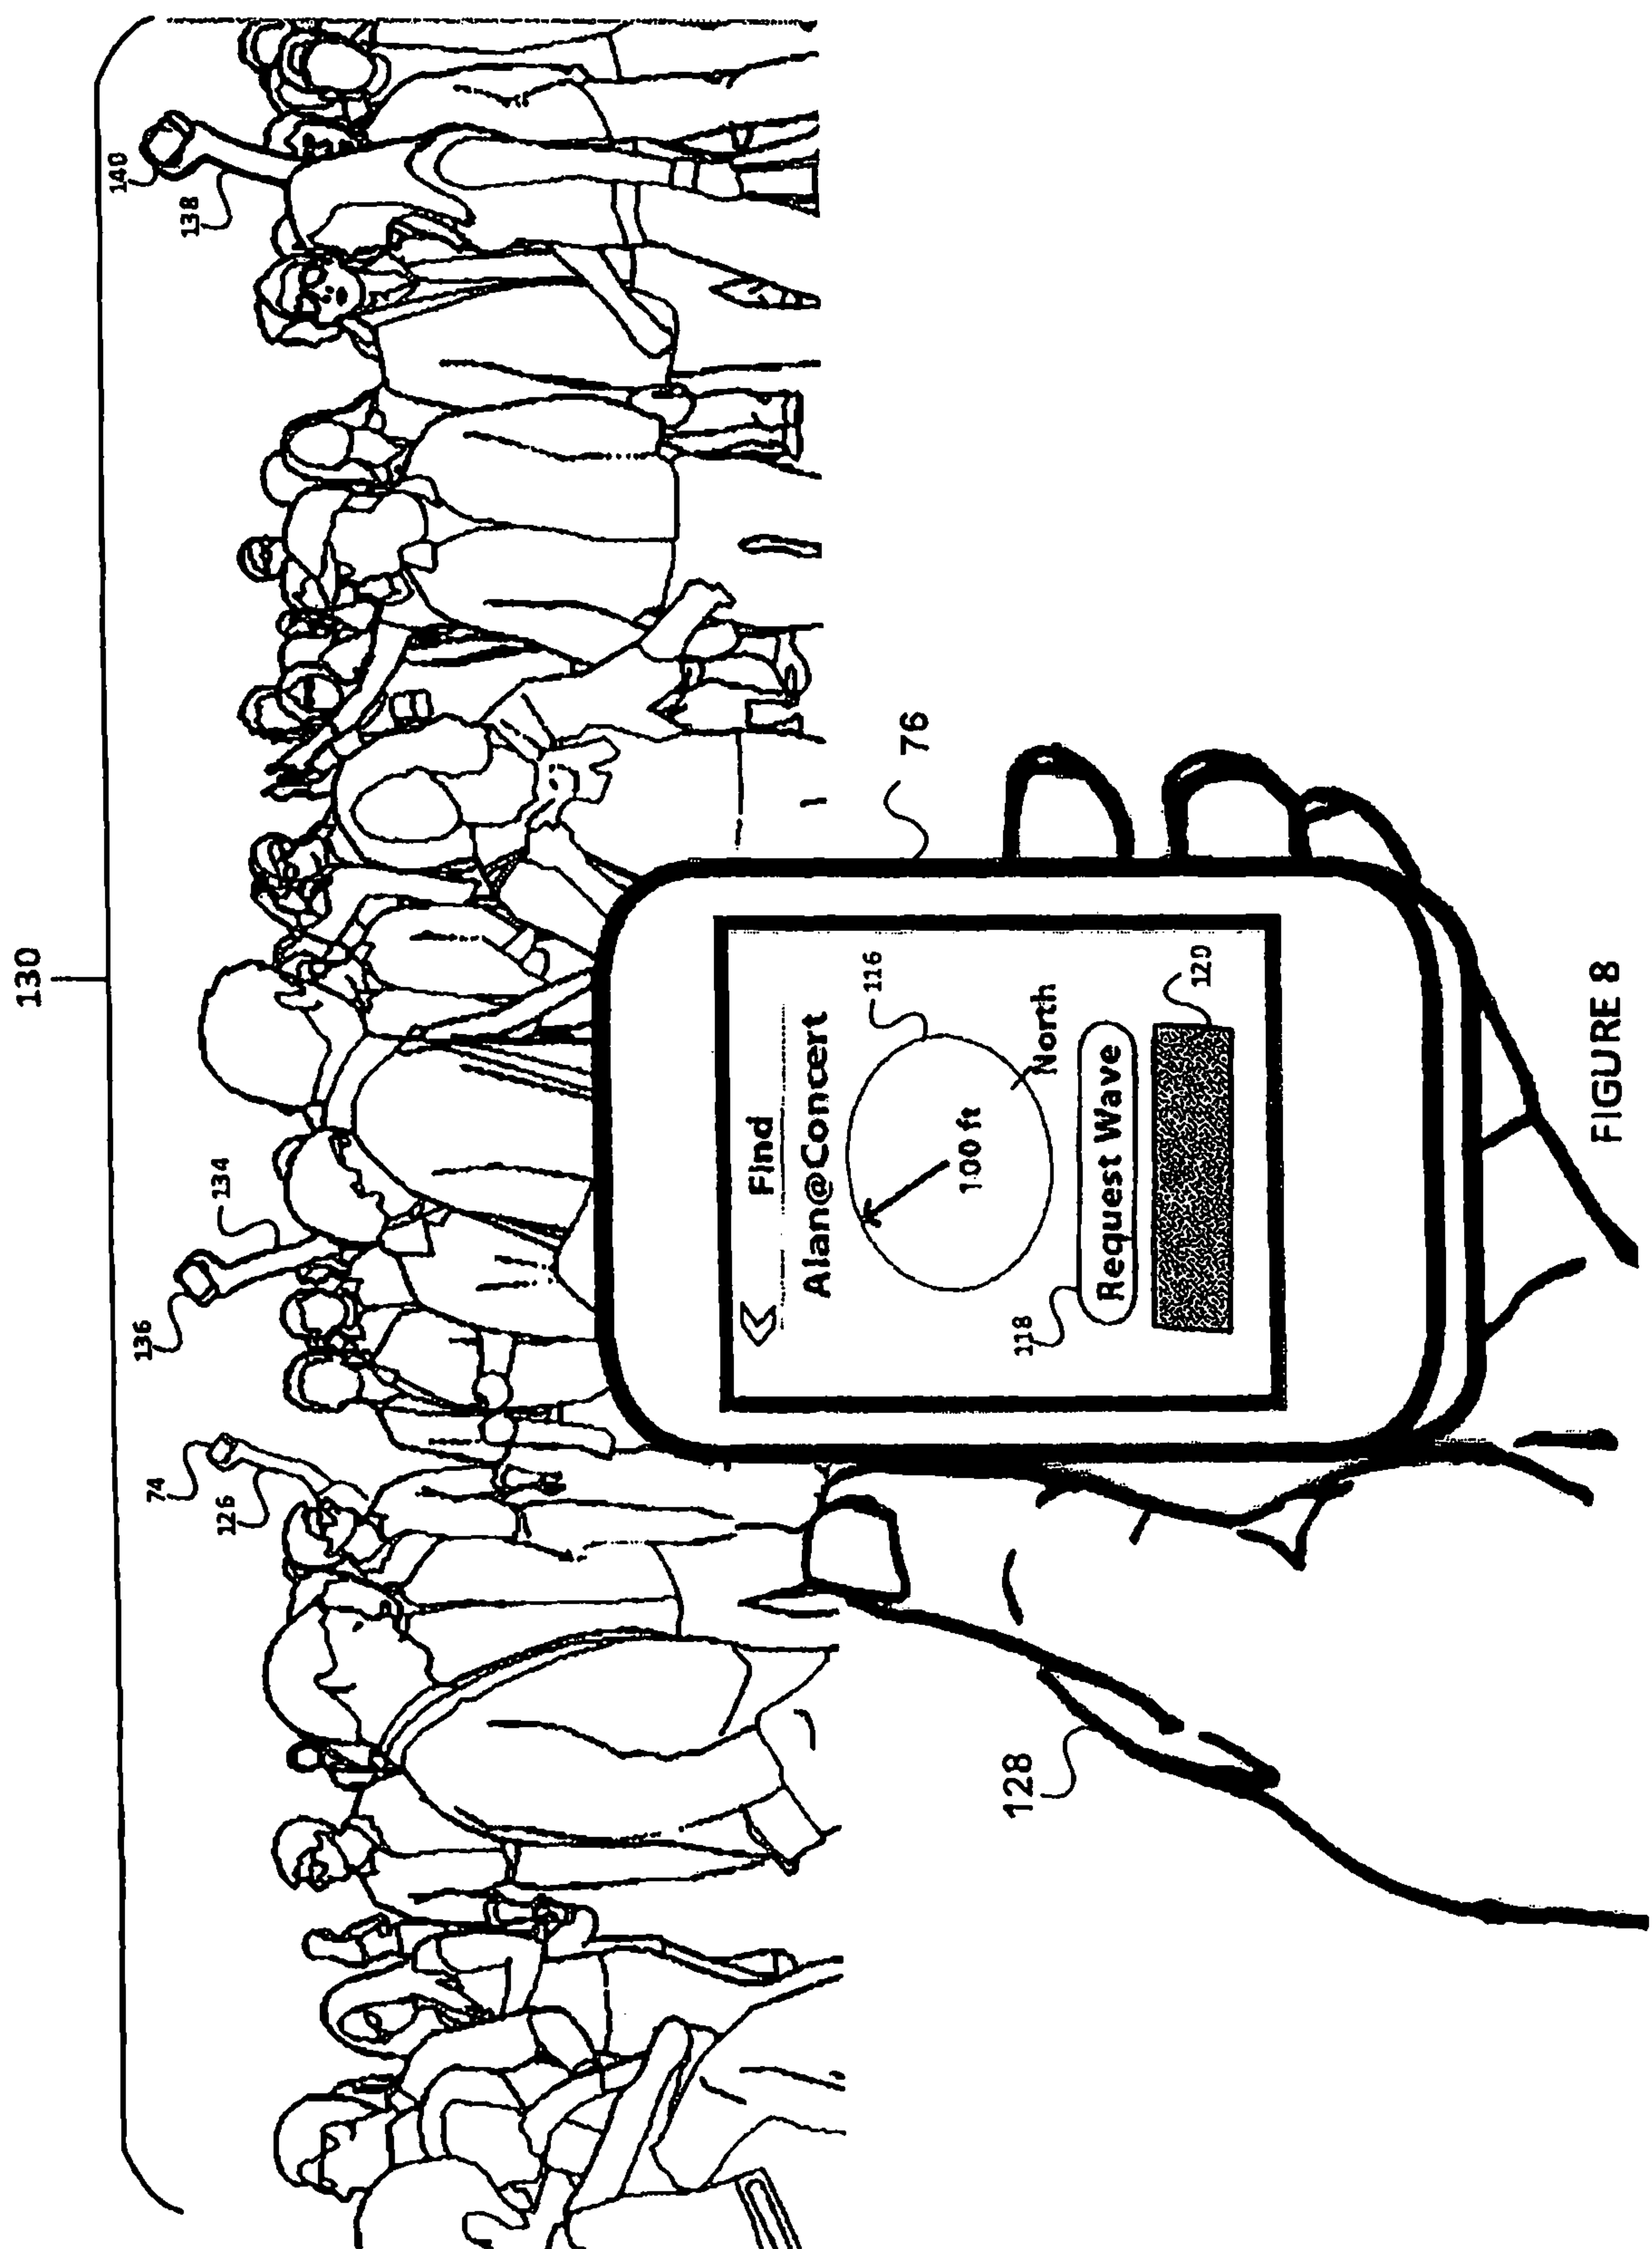


FIGURE 8

Beacons Sequences from Mobile Devices in Crowd

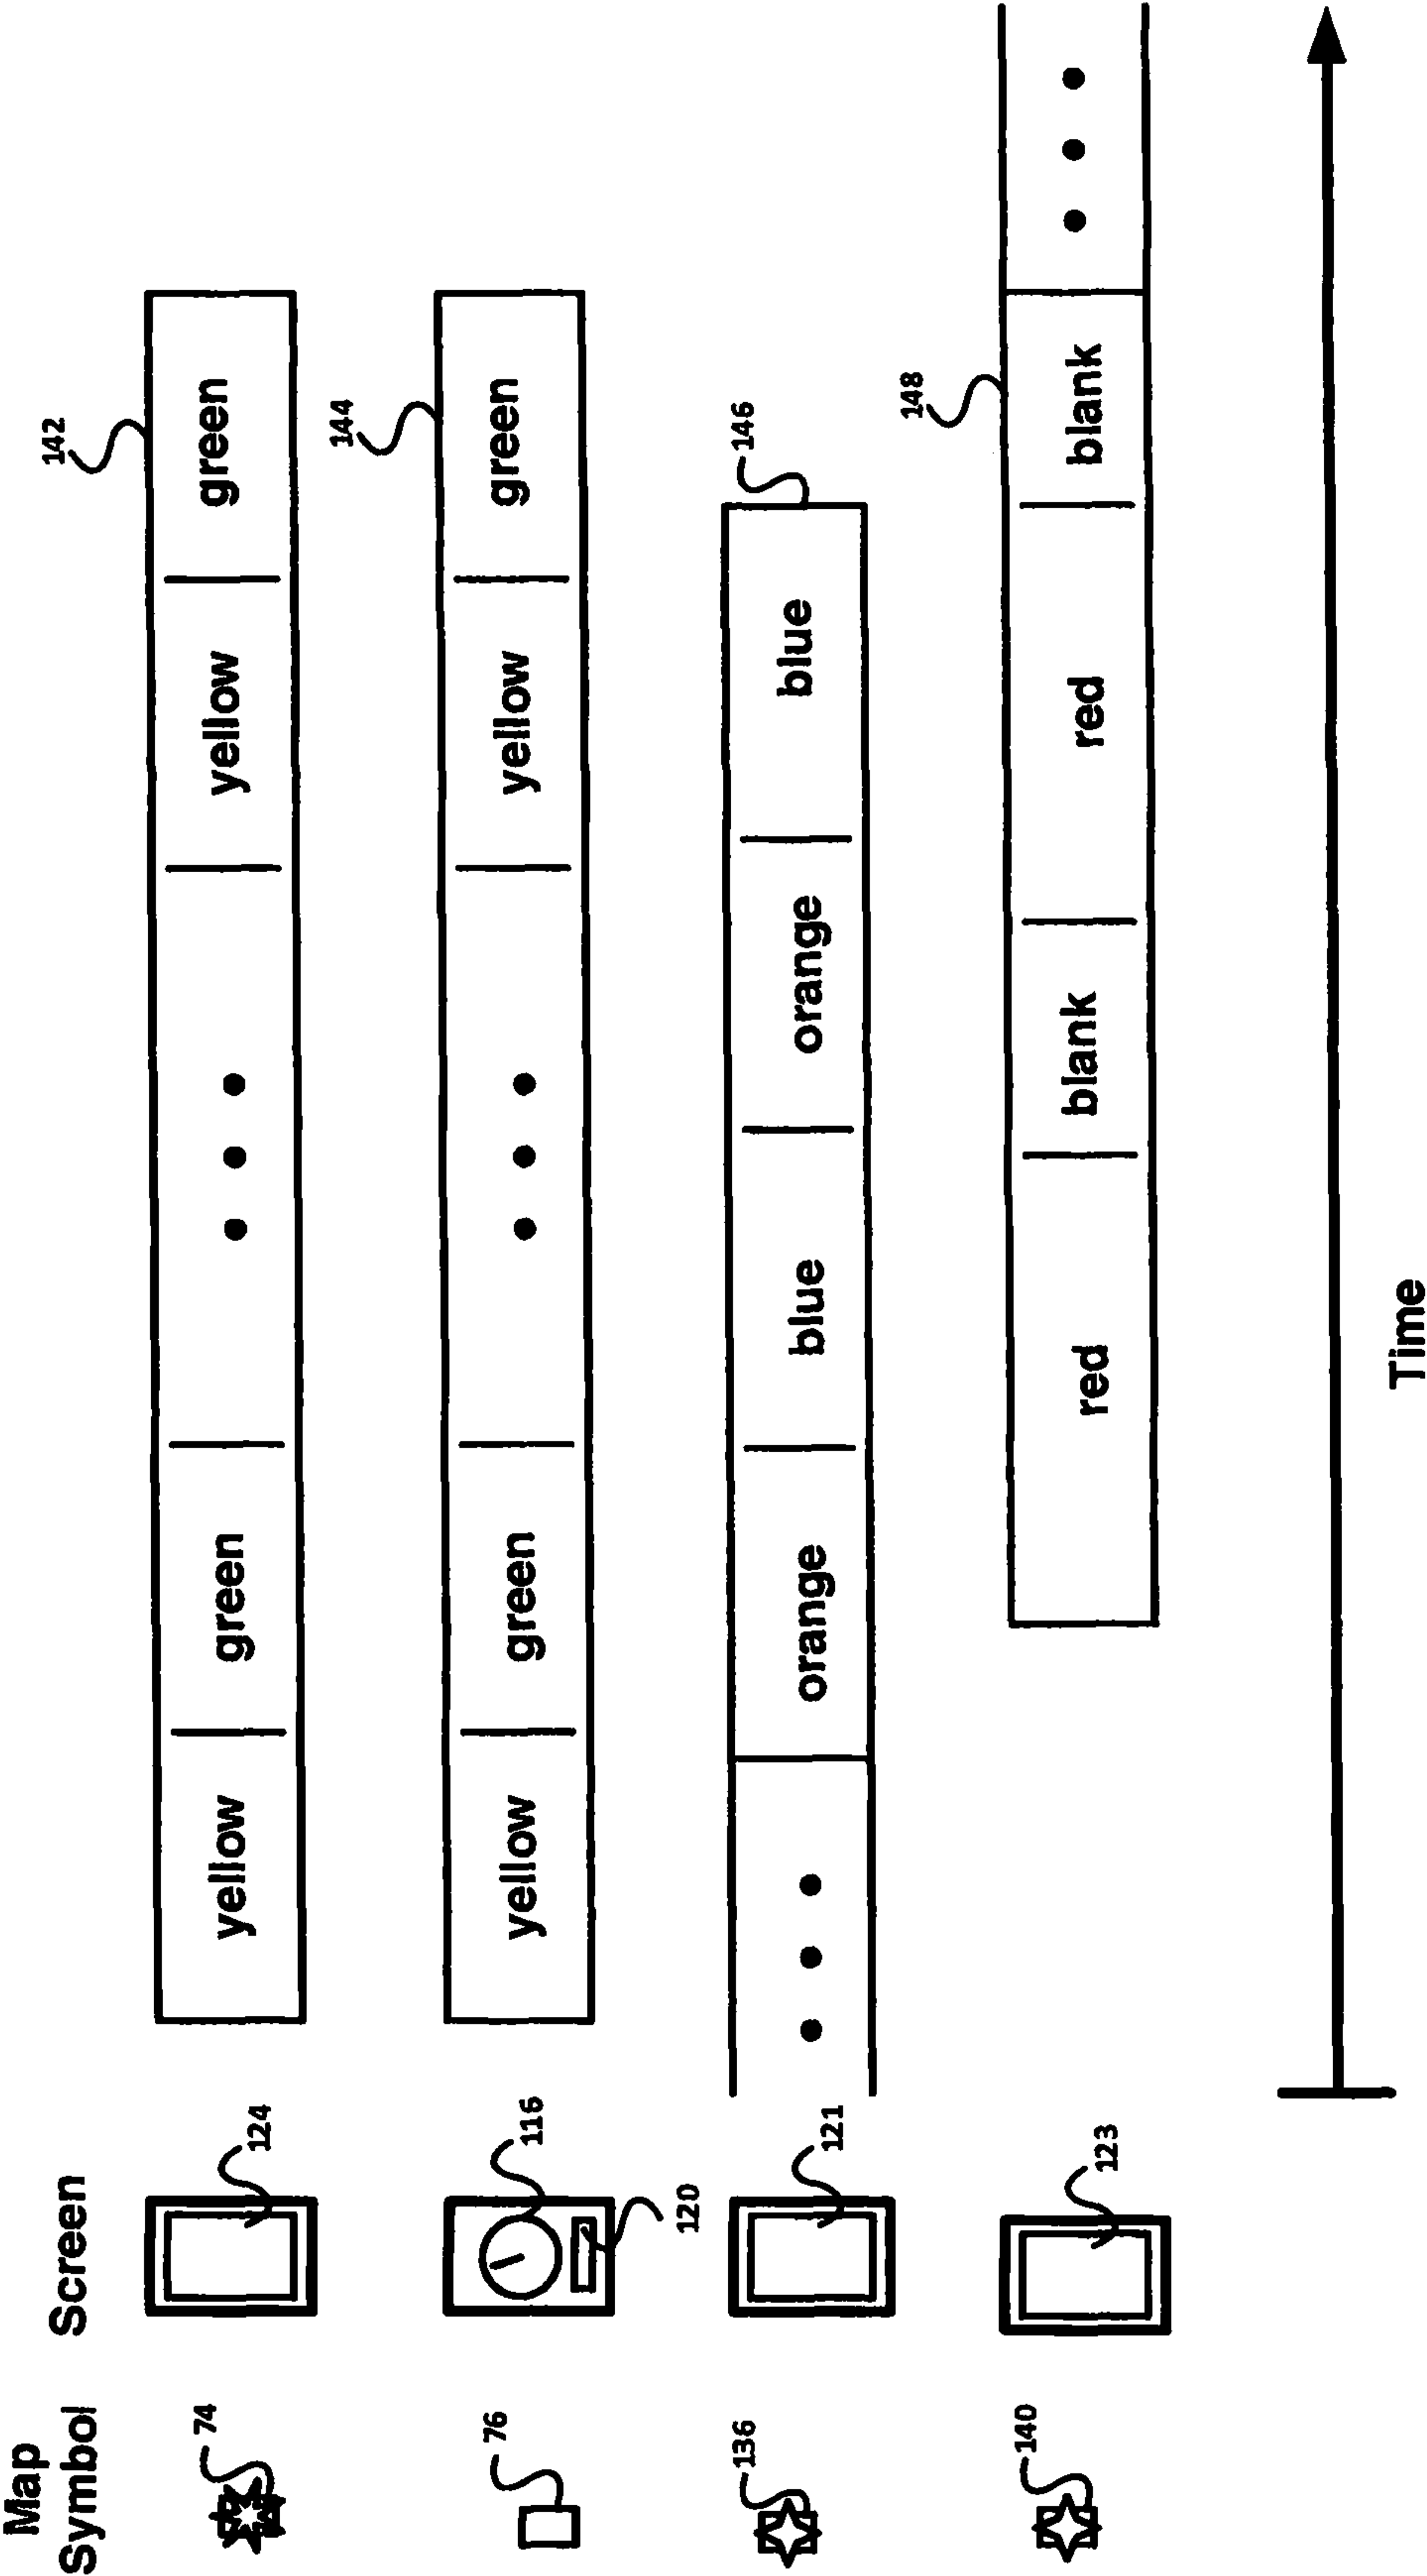


FIGURE 9

Beacon Sequences

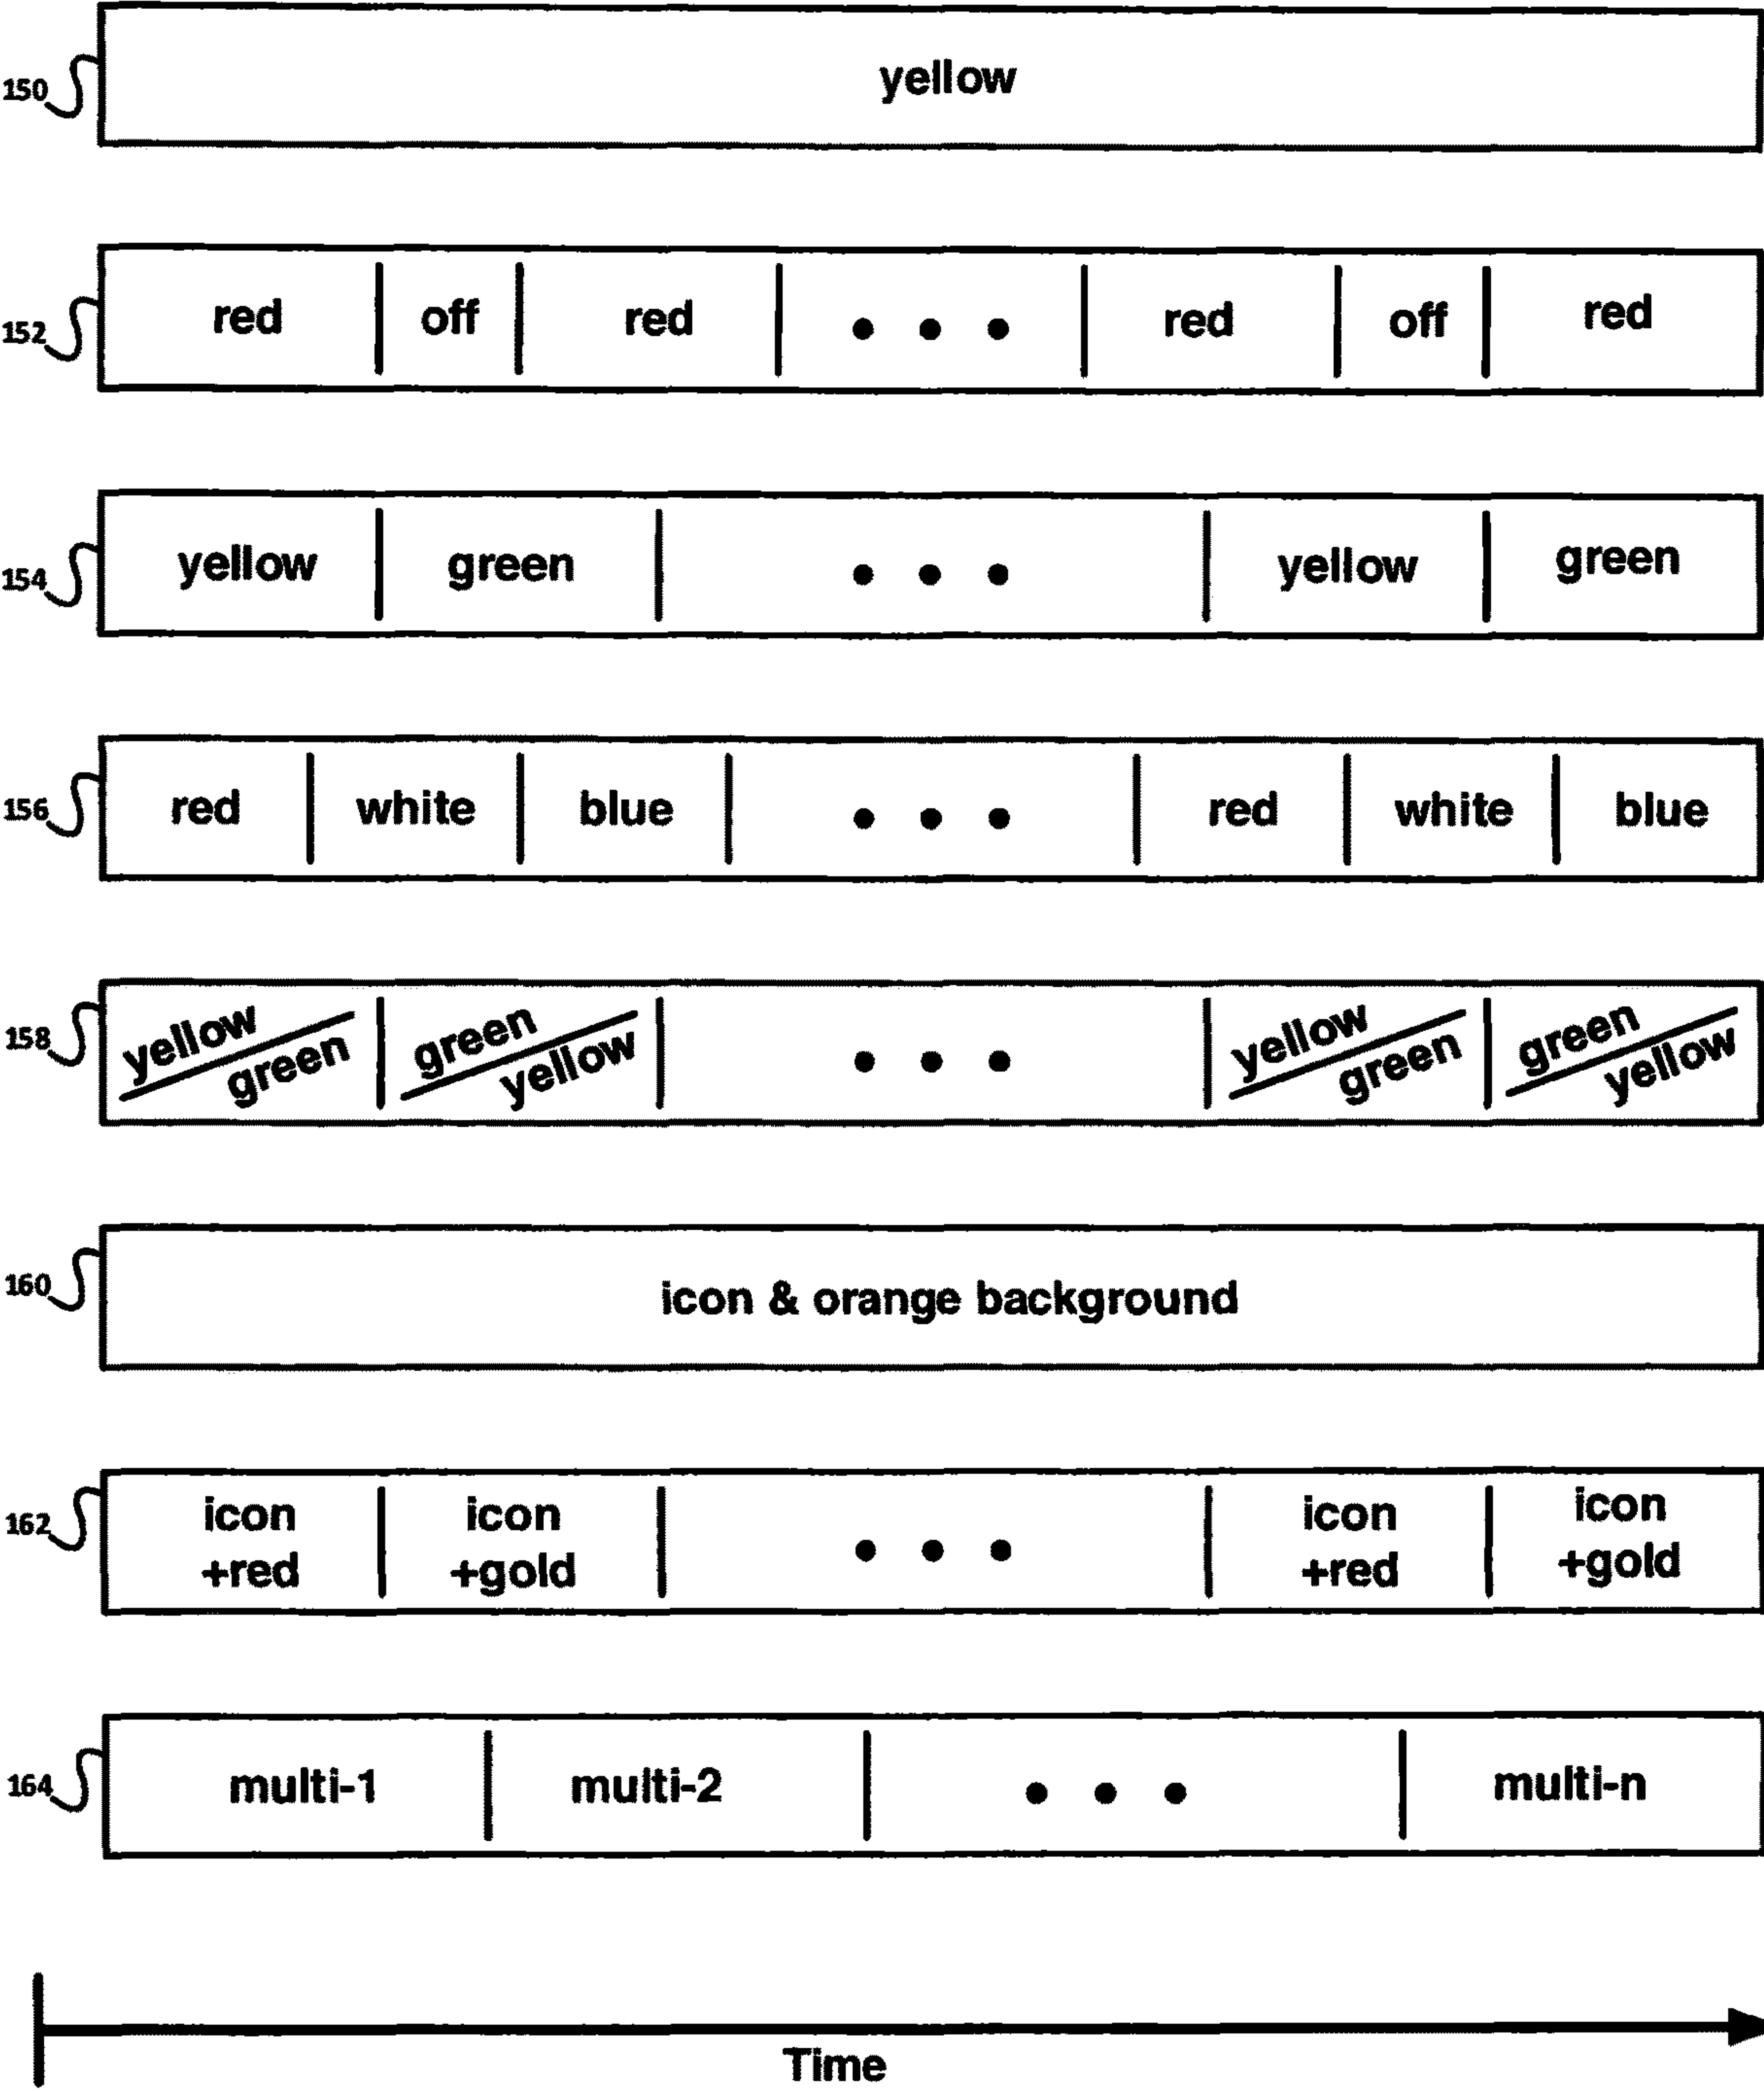


FIGURE 10

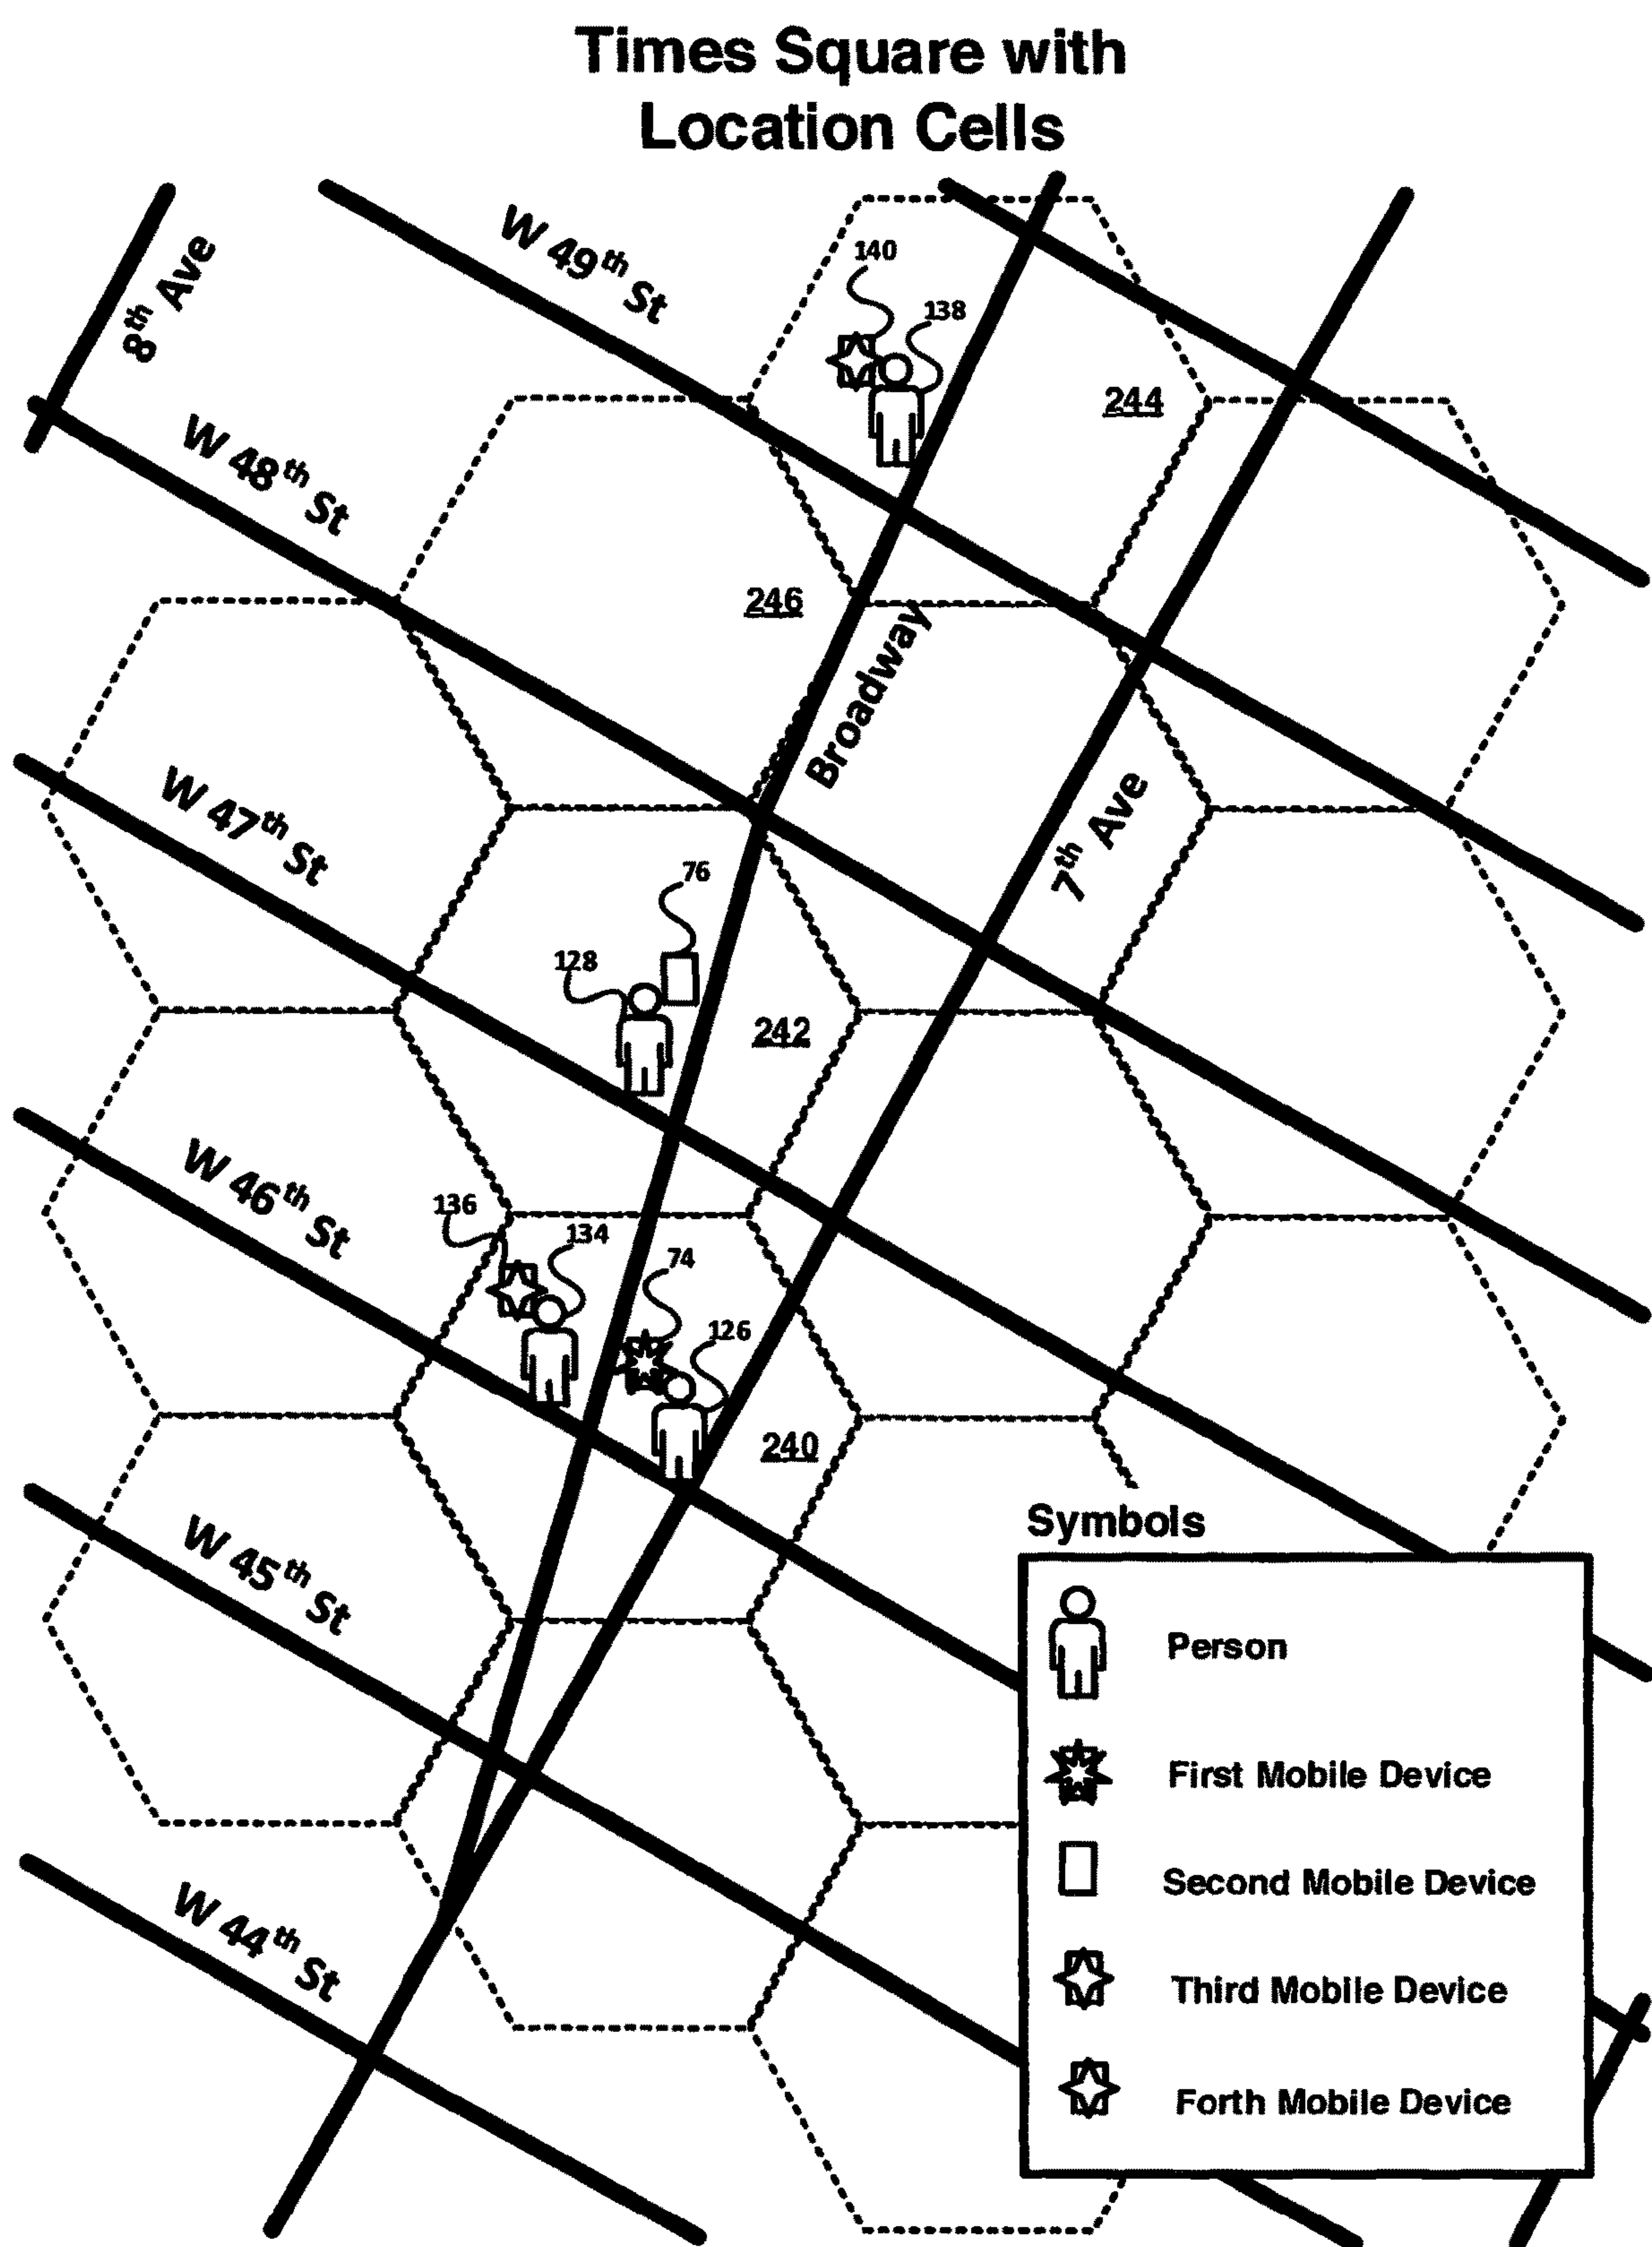


FIGURE 11

Beacon Sequences Assigned by Location Cell

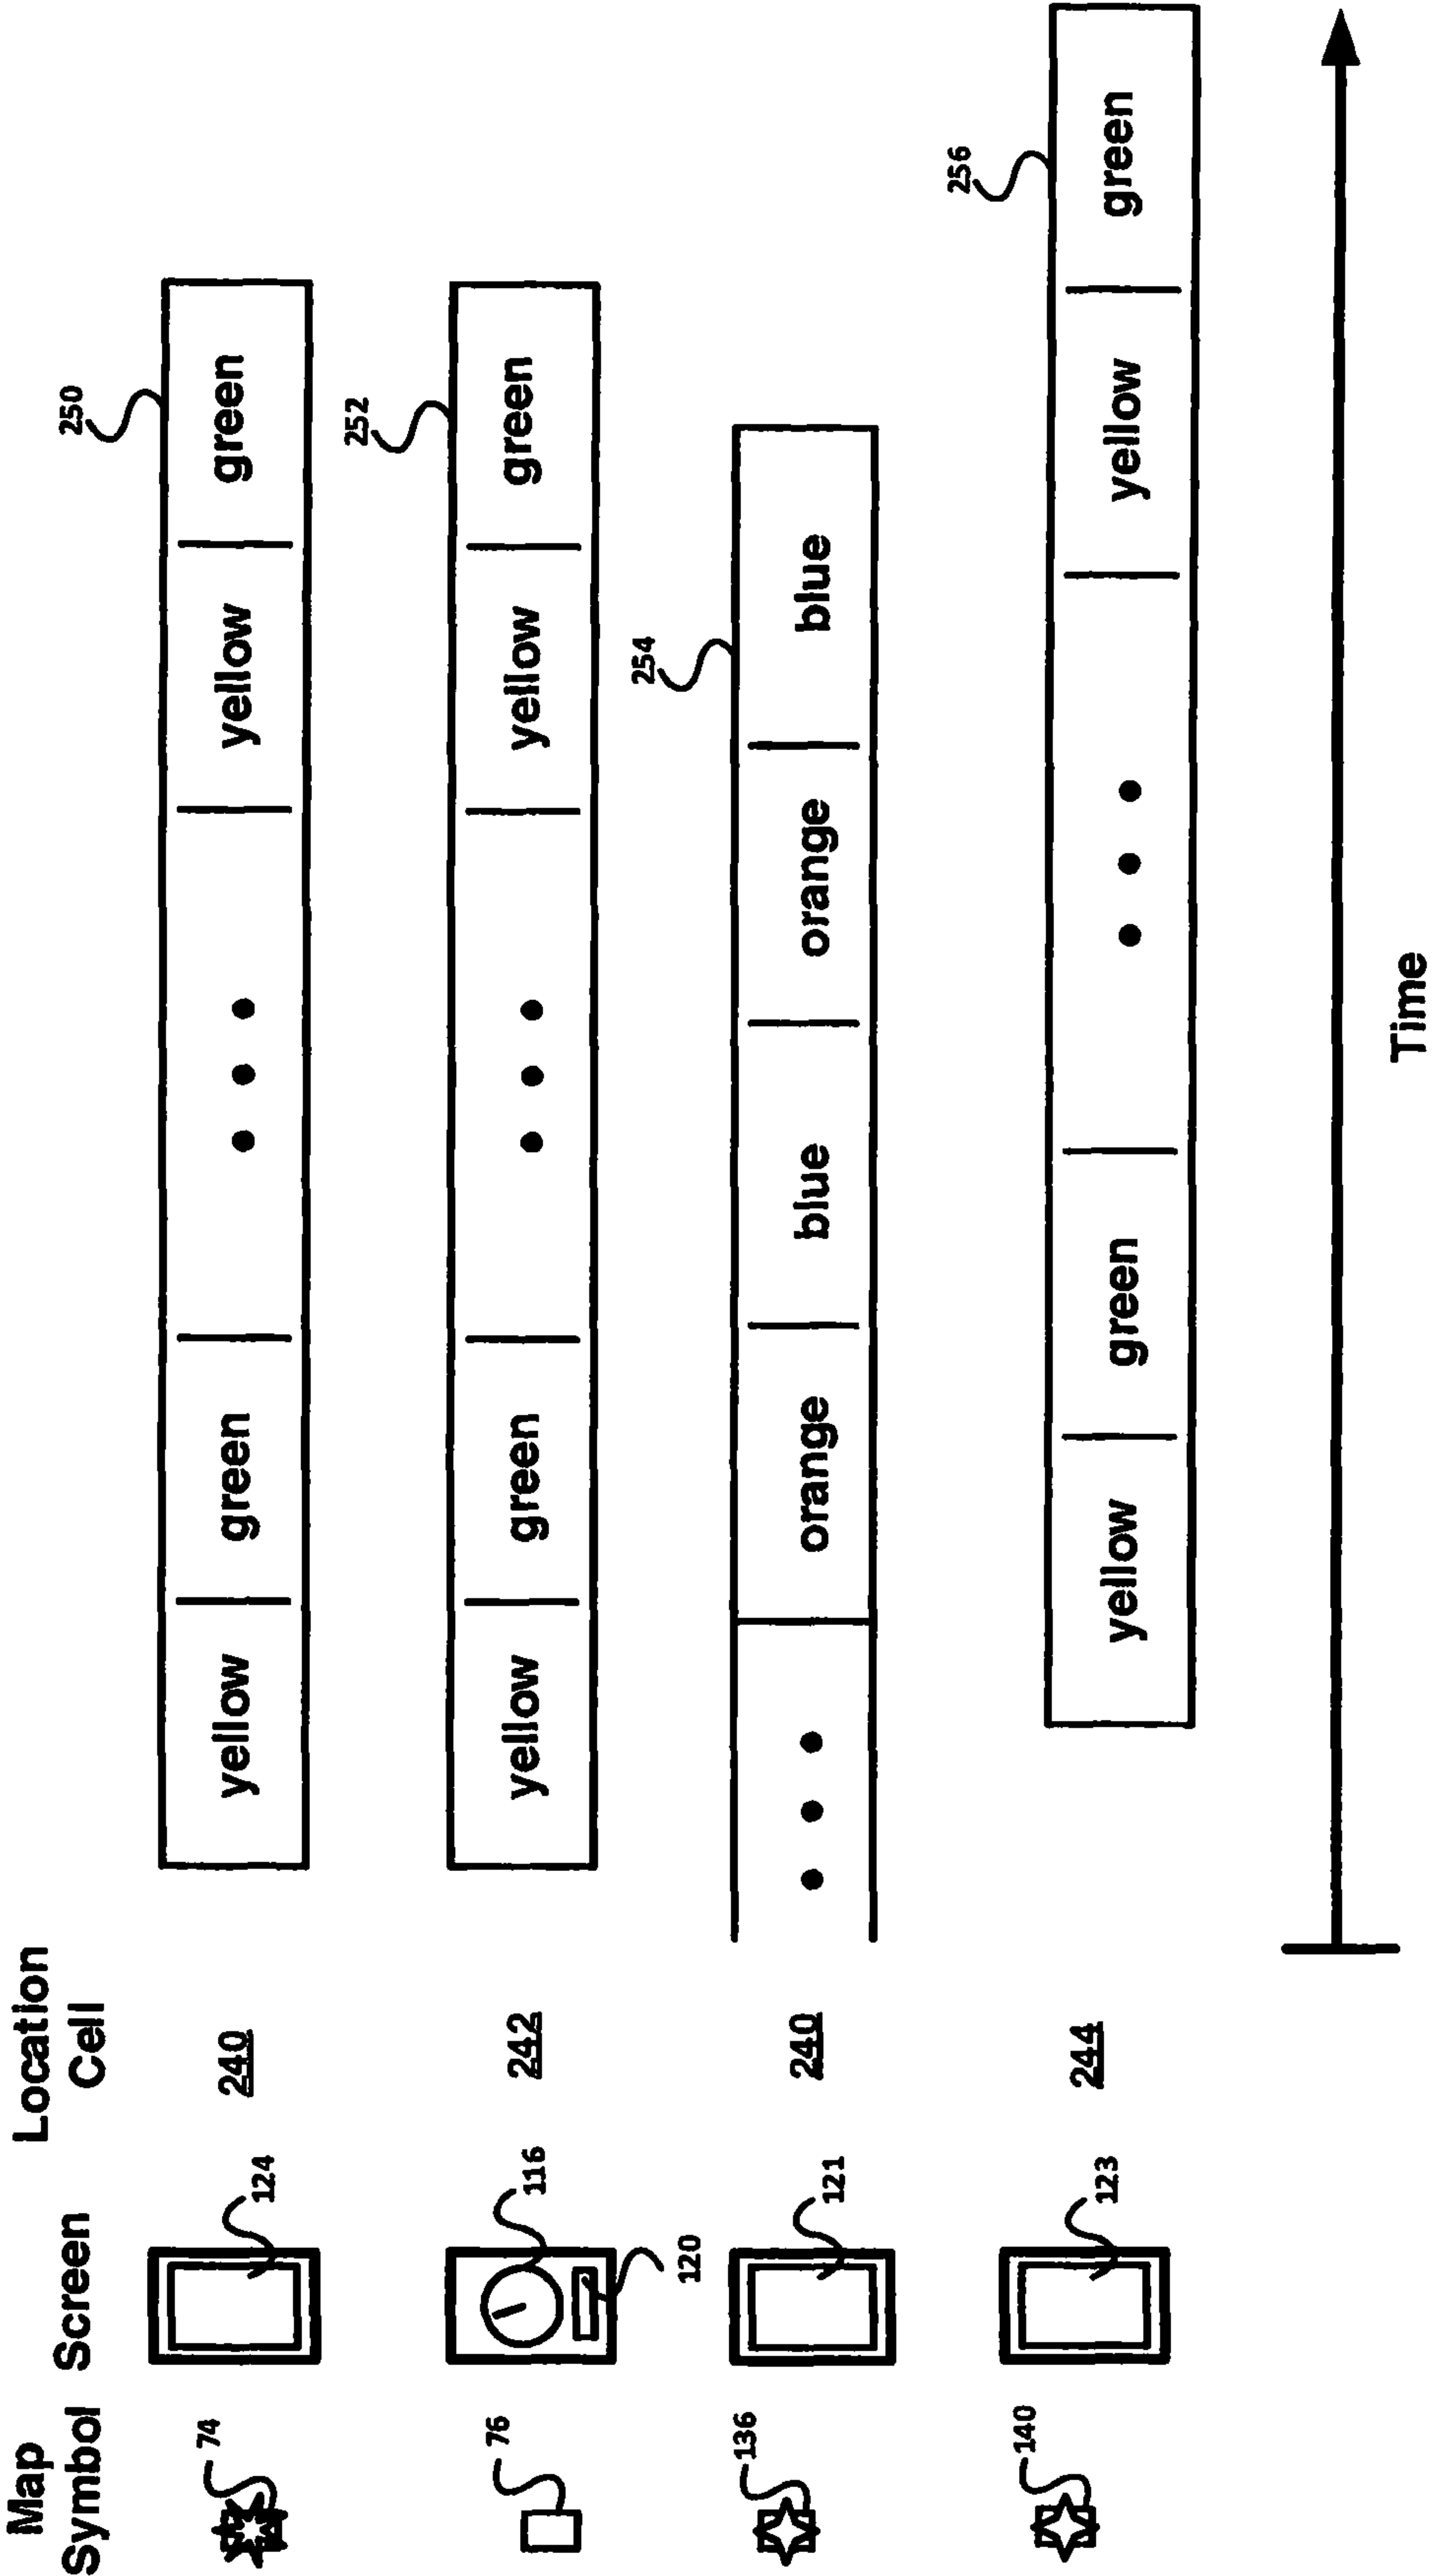


FIGURE 12

Assigning Beacon Sequences by Venue

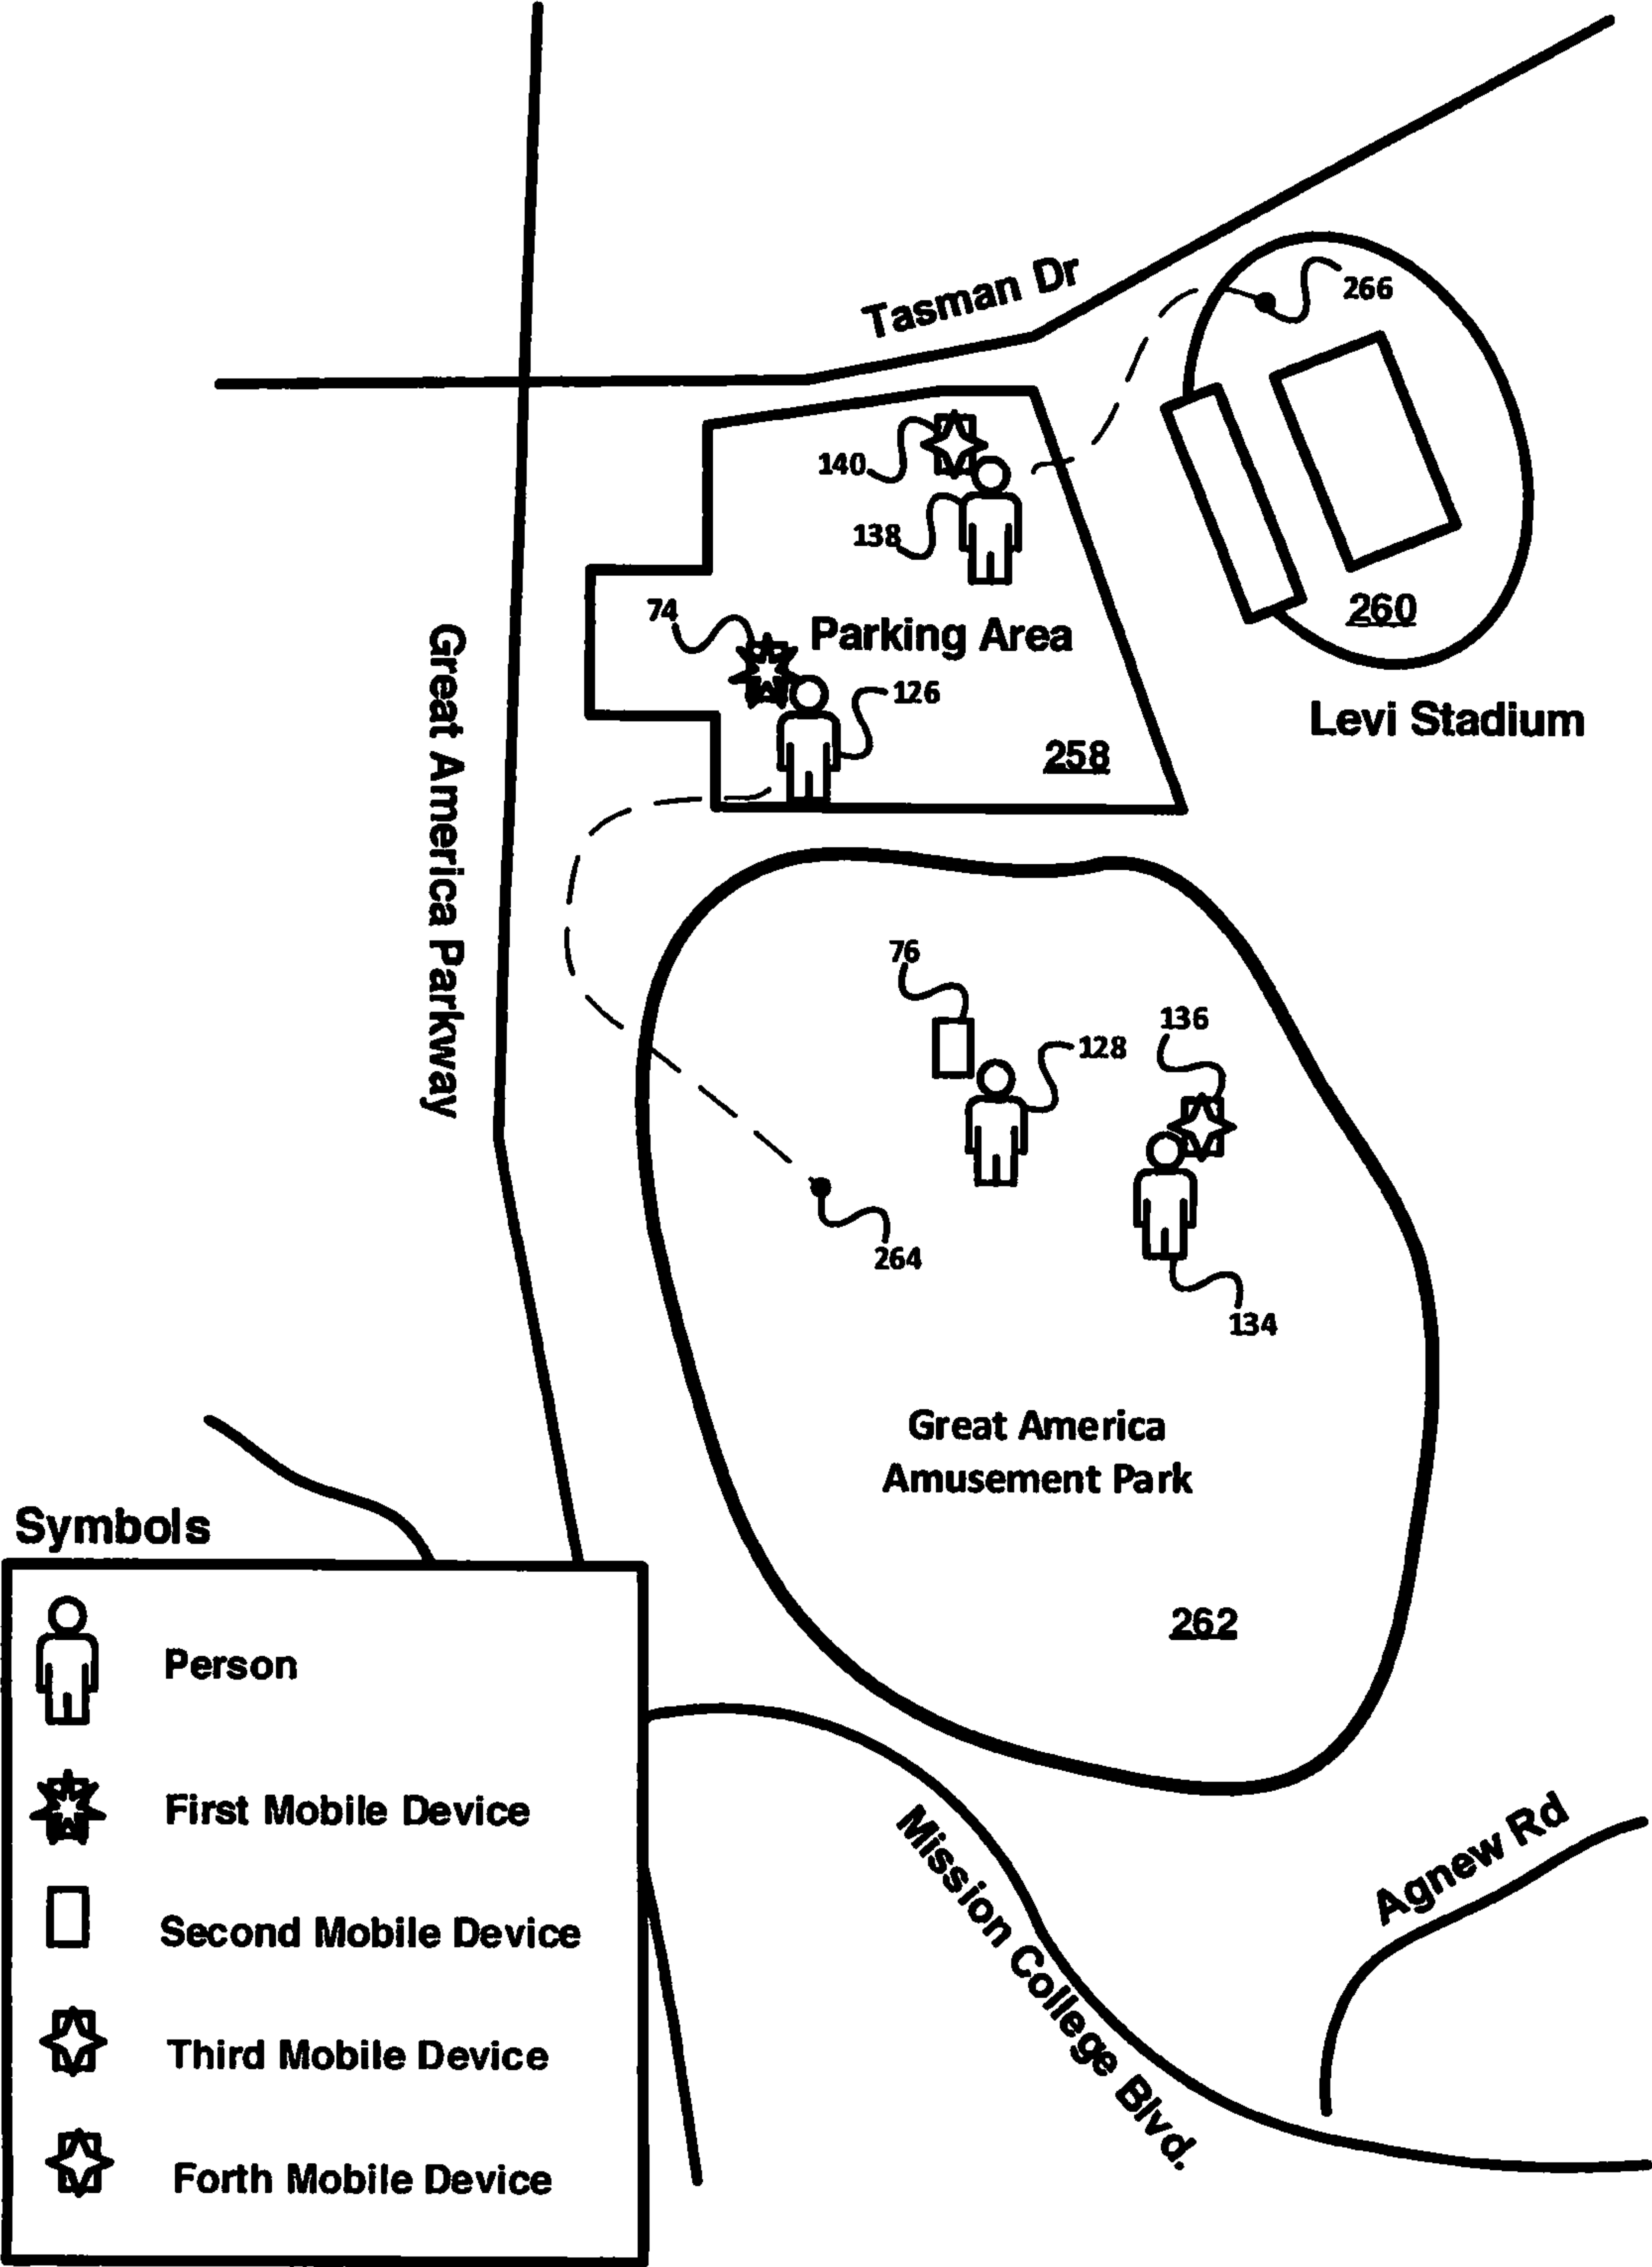


FIGURE 13

Beacons Sequences Assigned by Venue

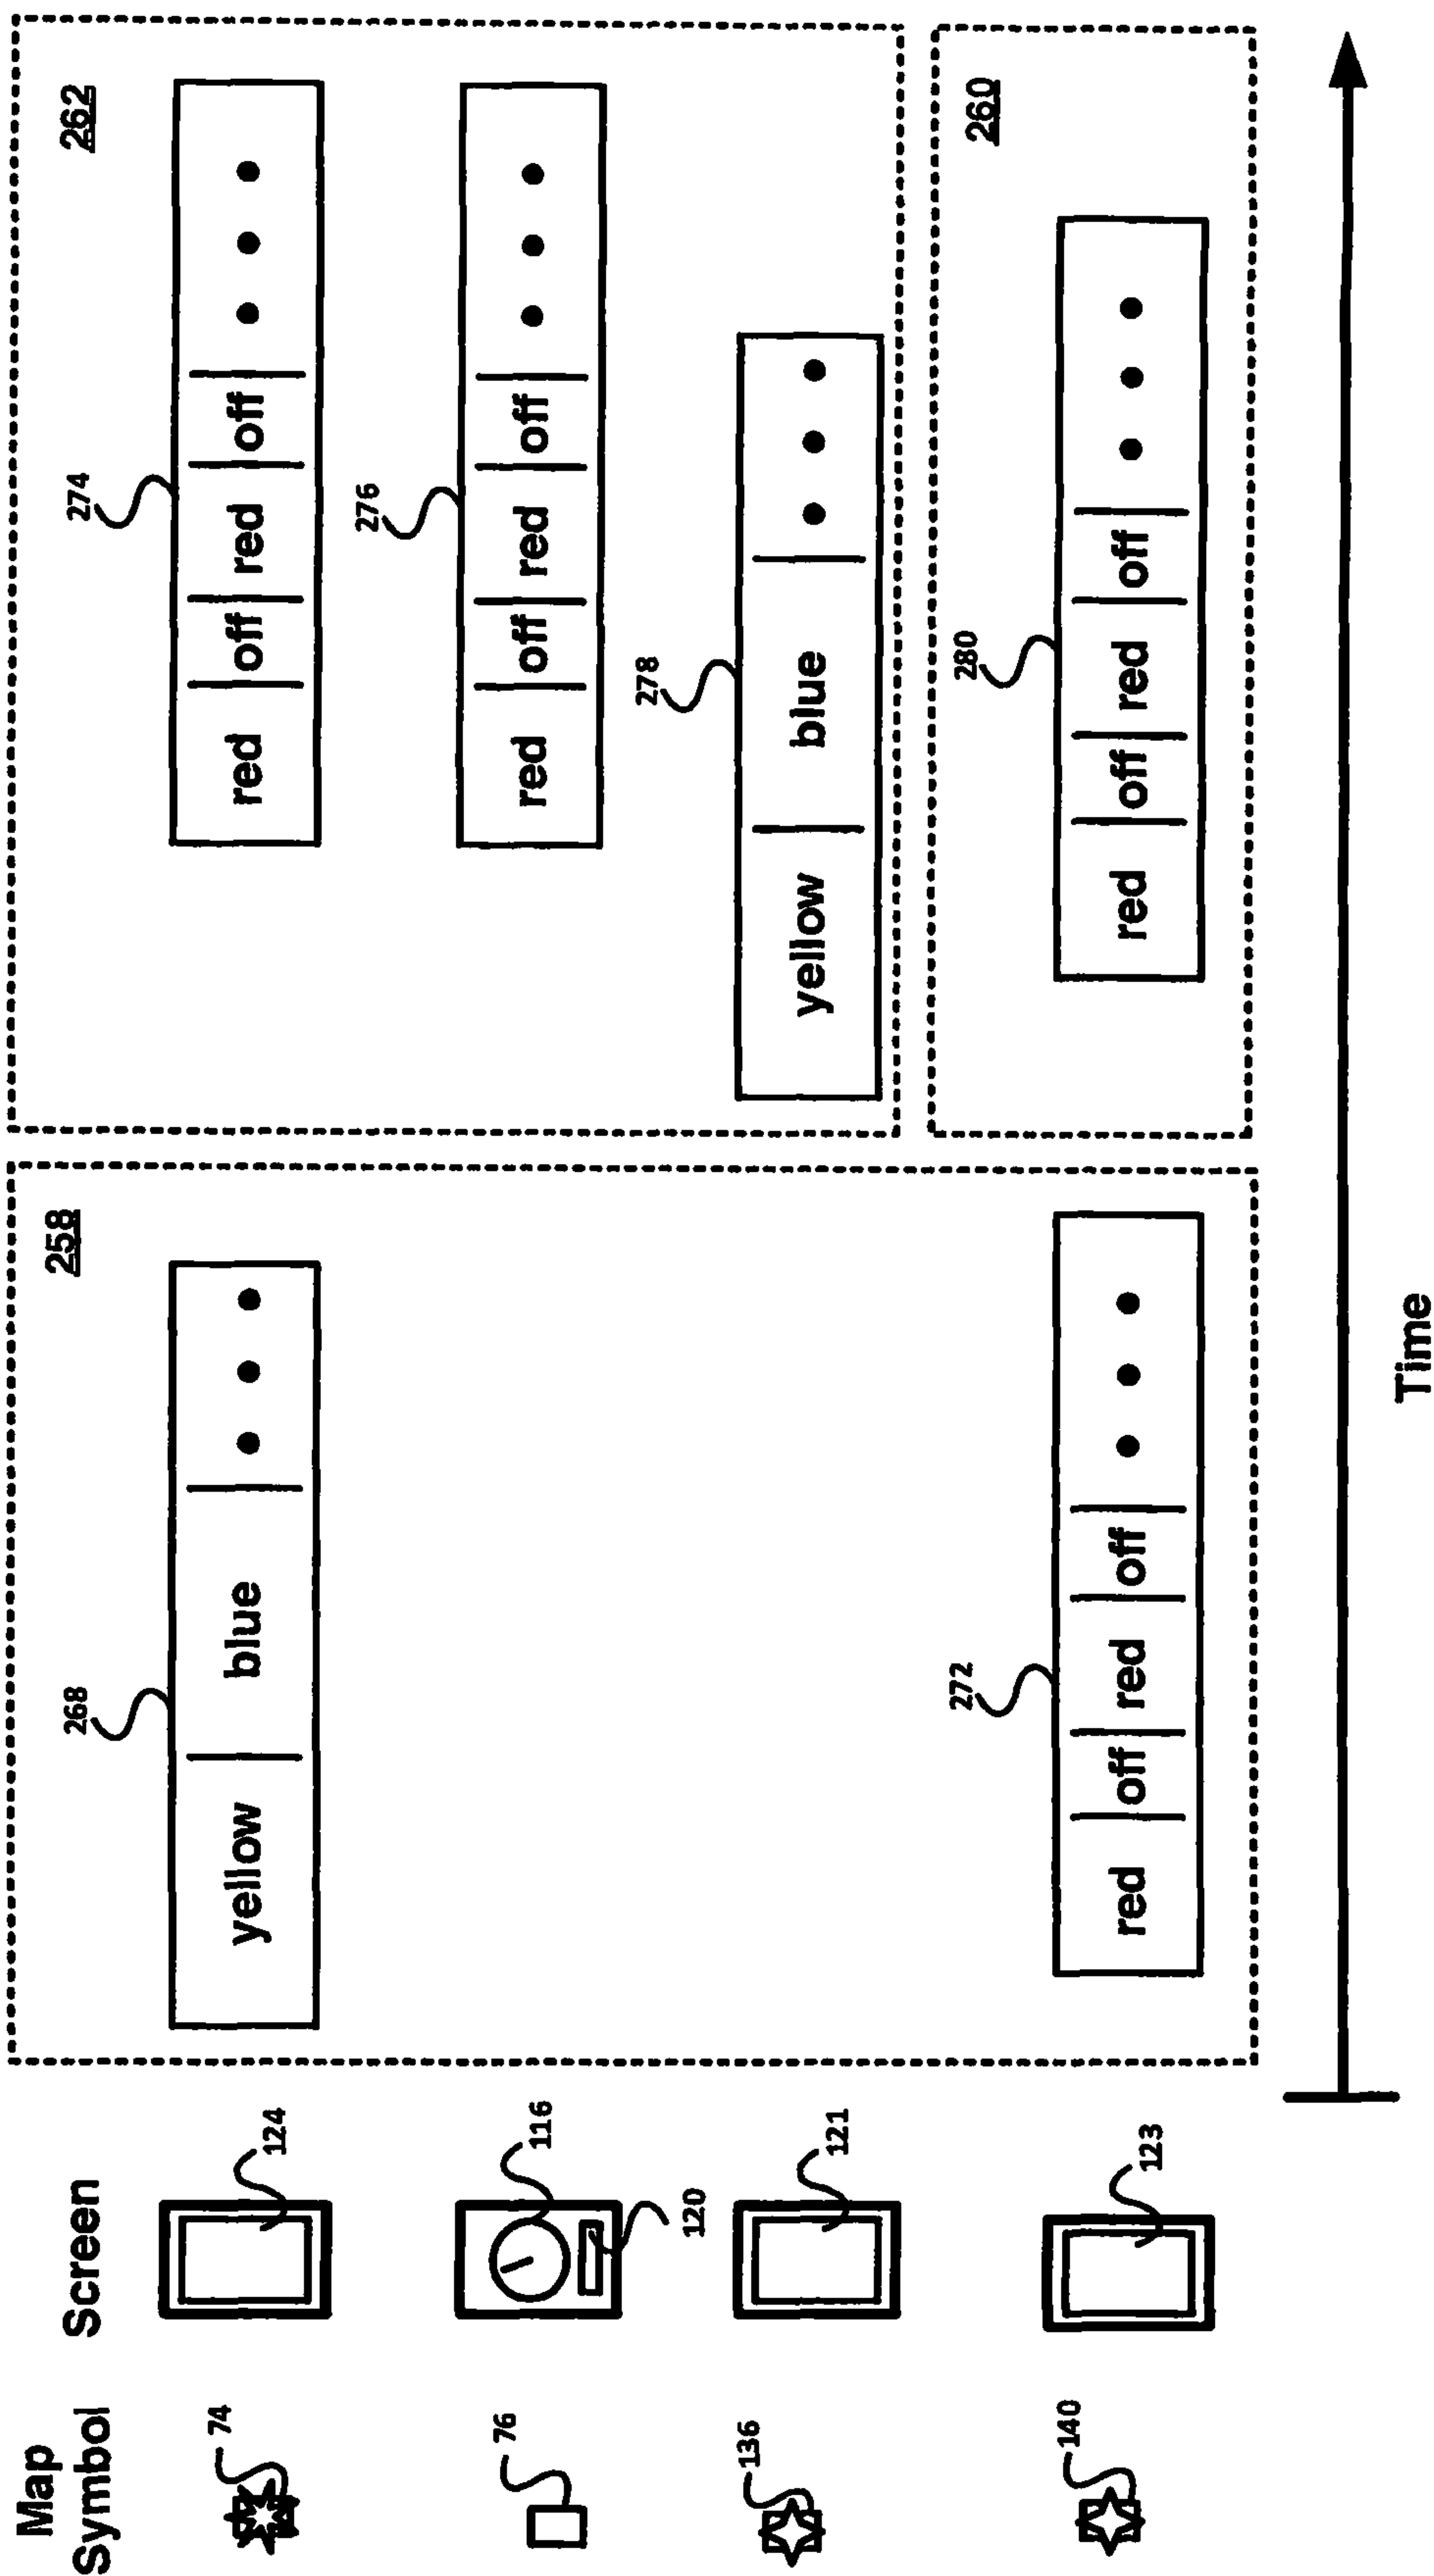


FIGURE 14

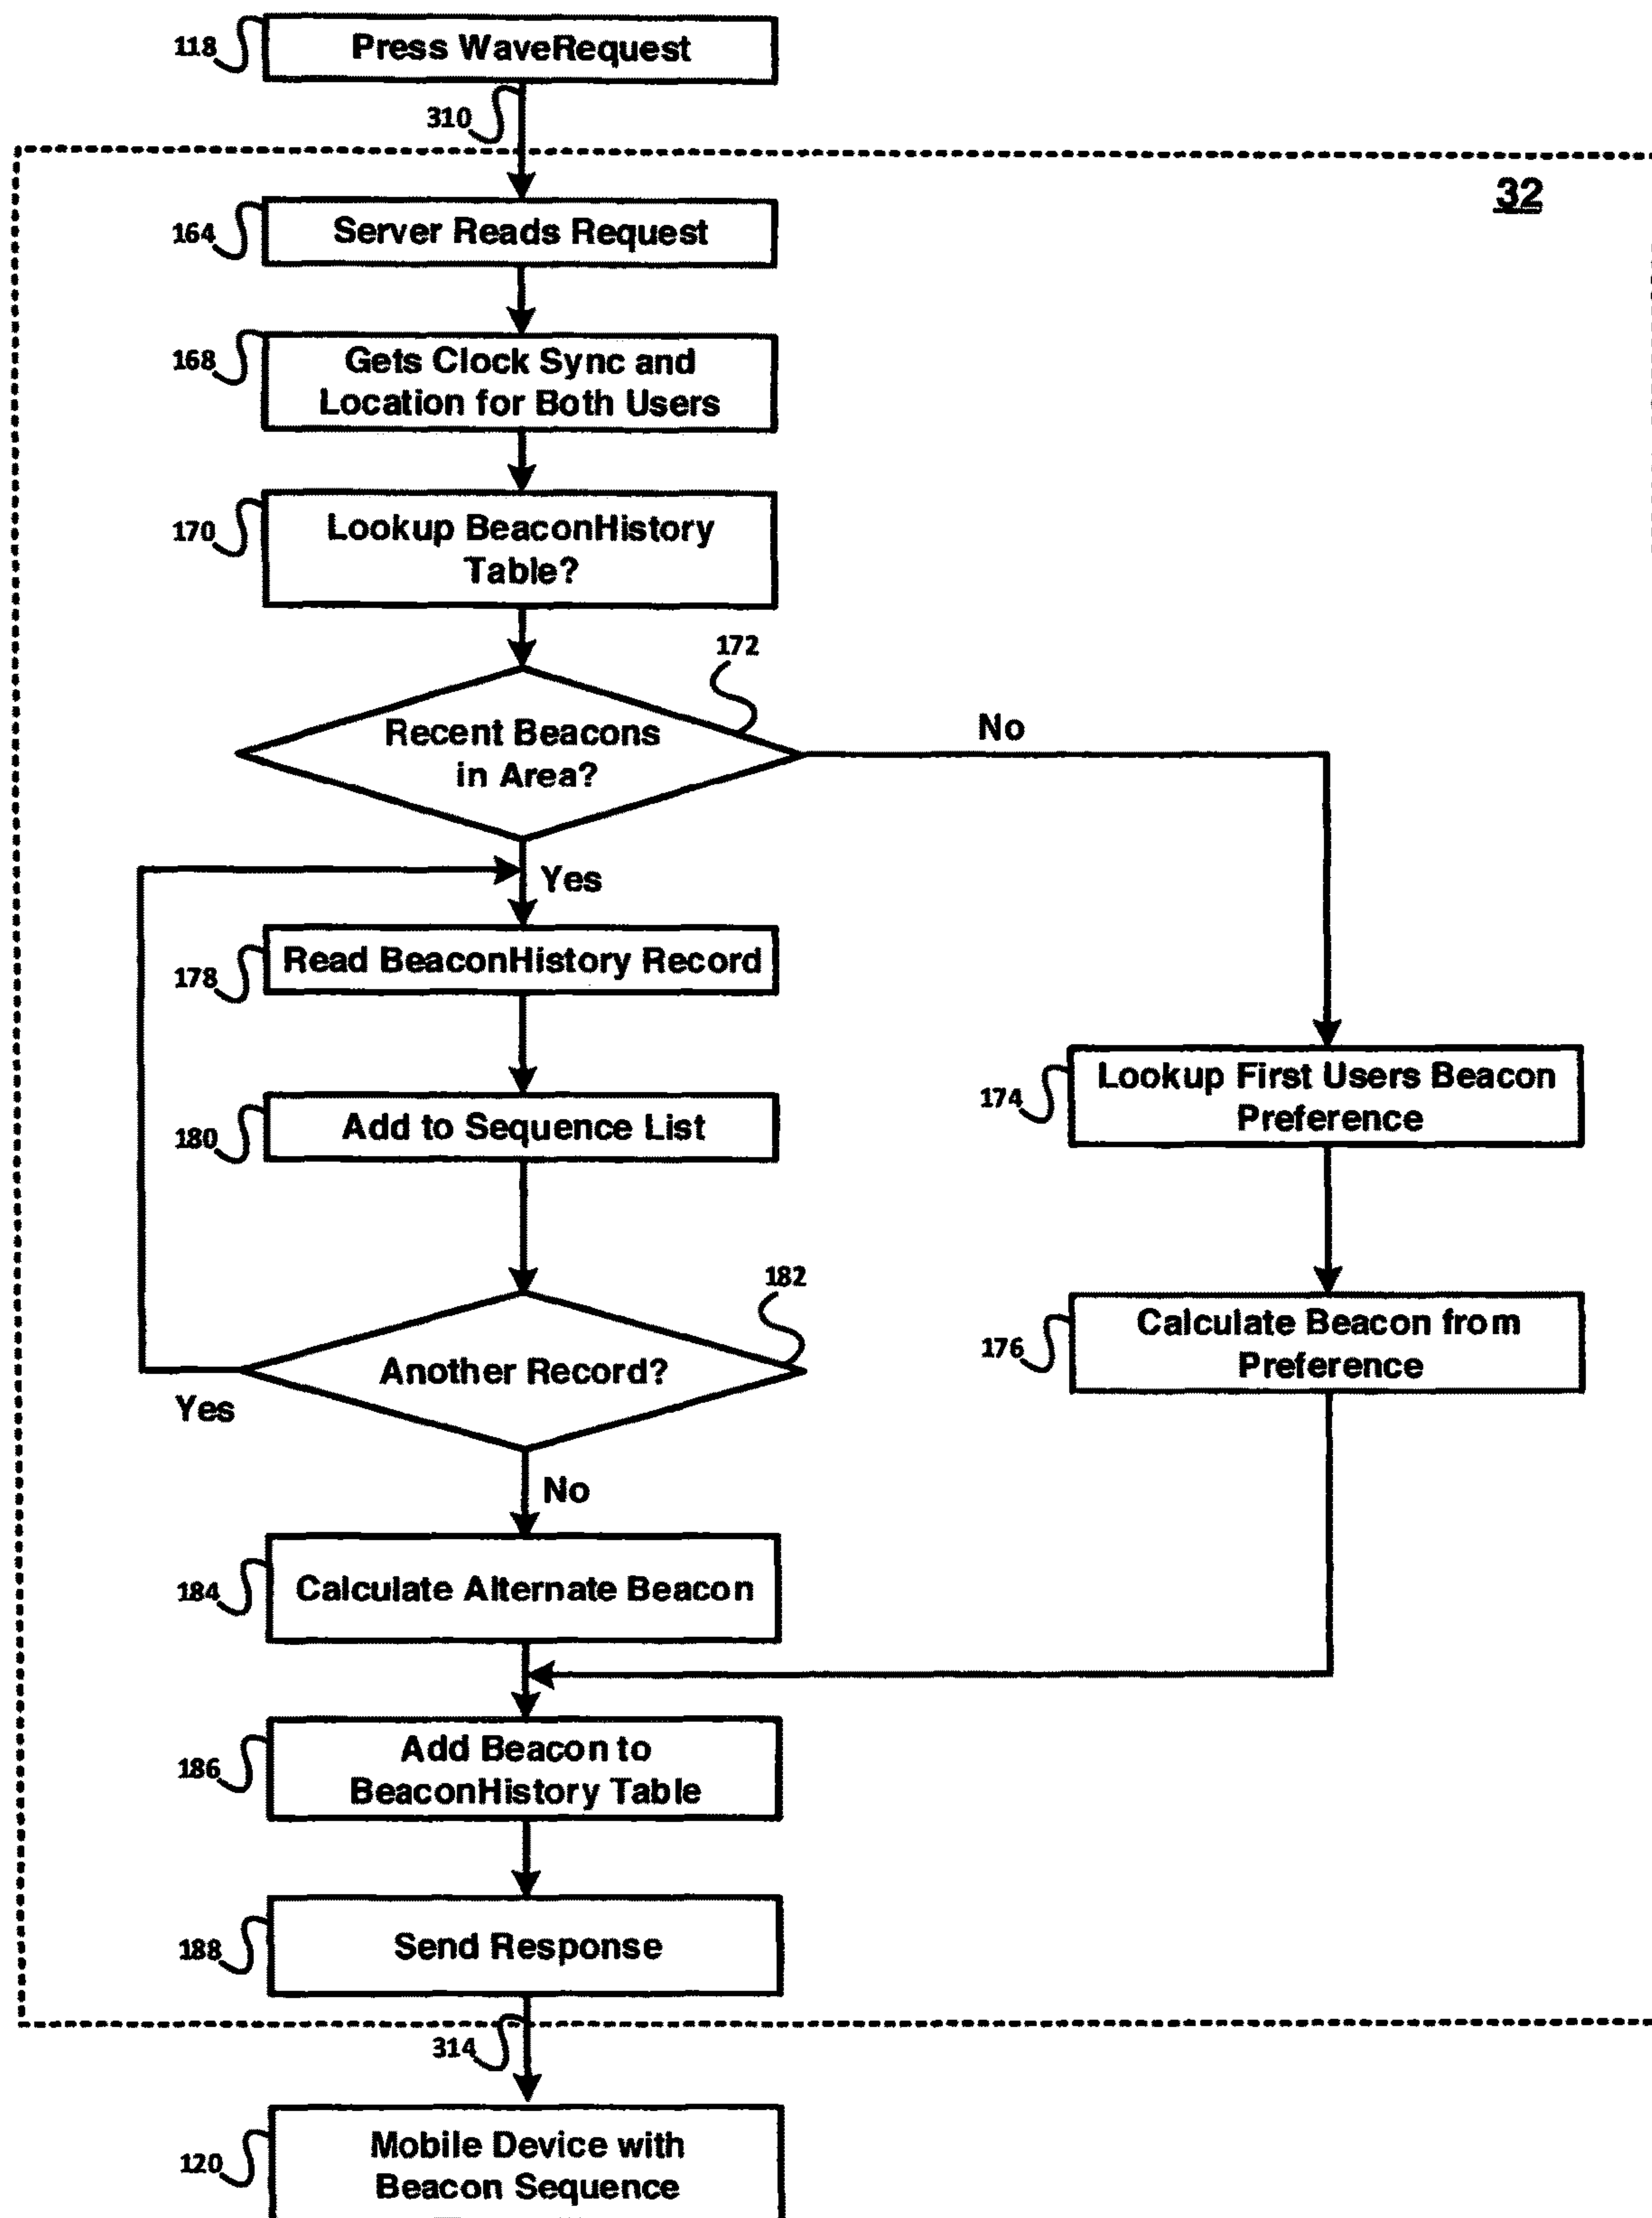


FIGURE 15

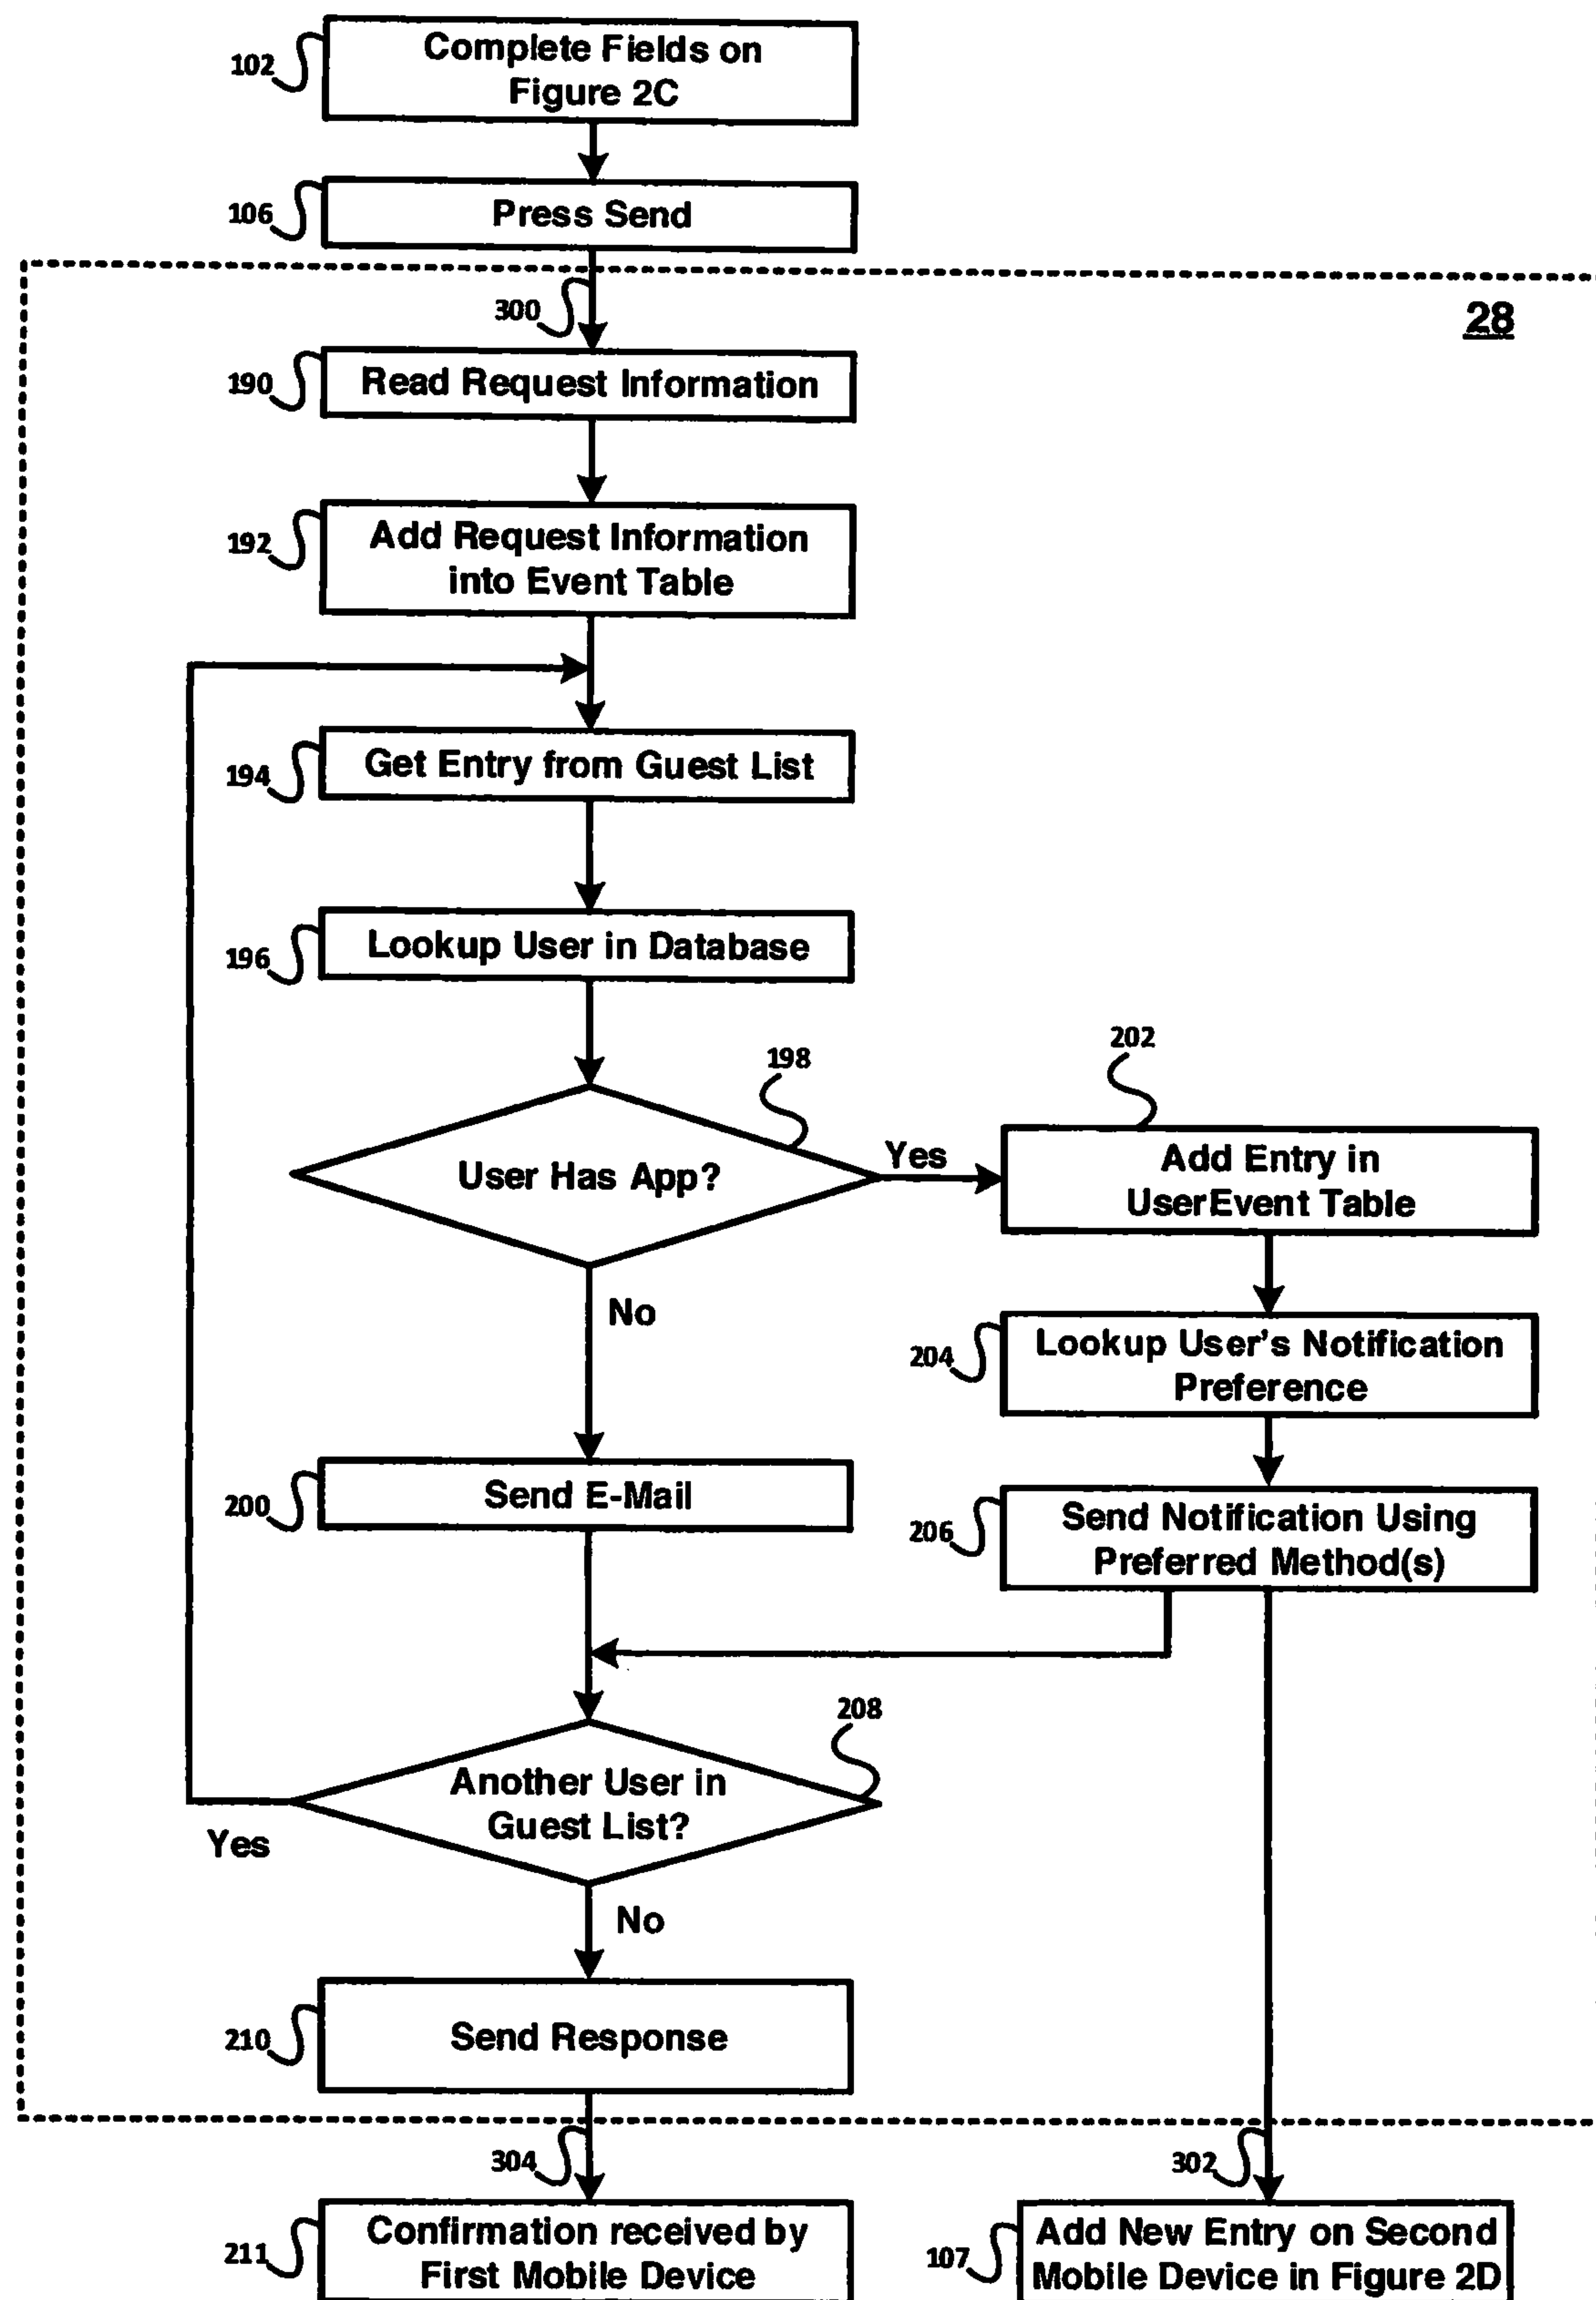


FIGURE 16

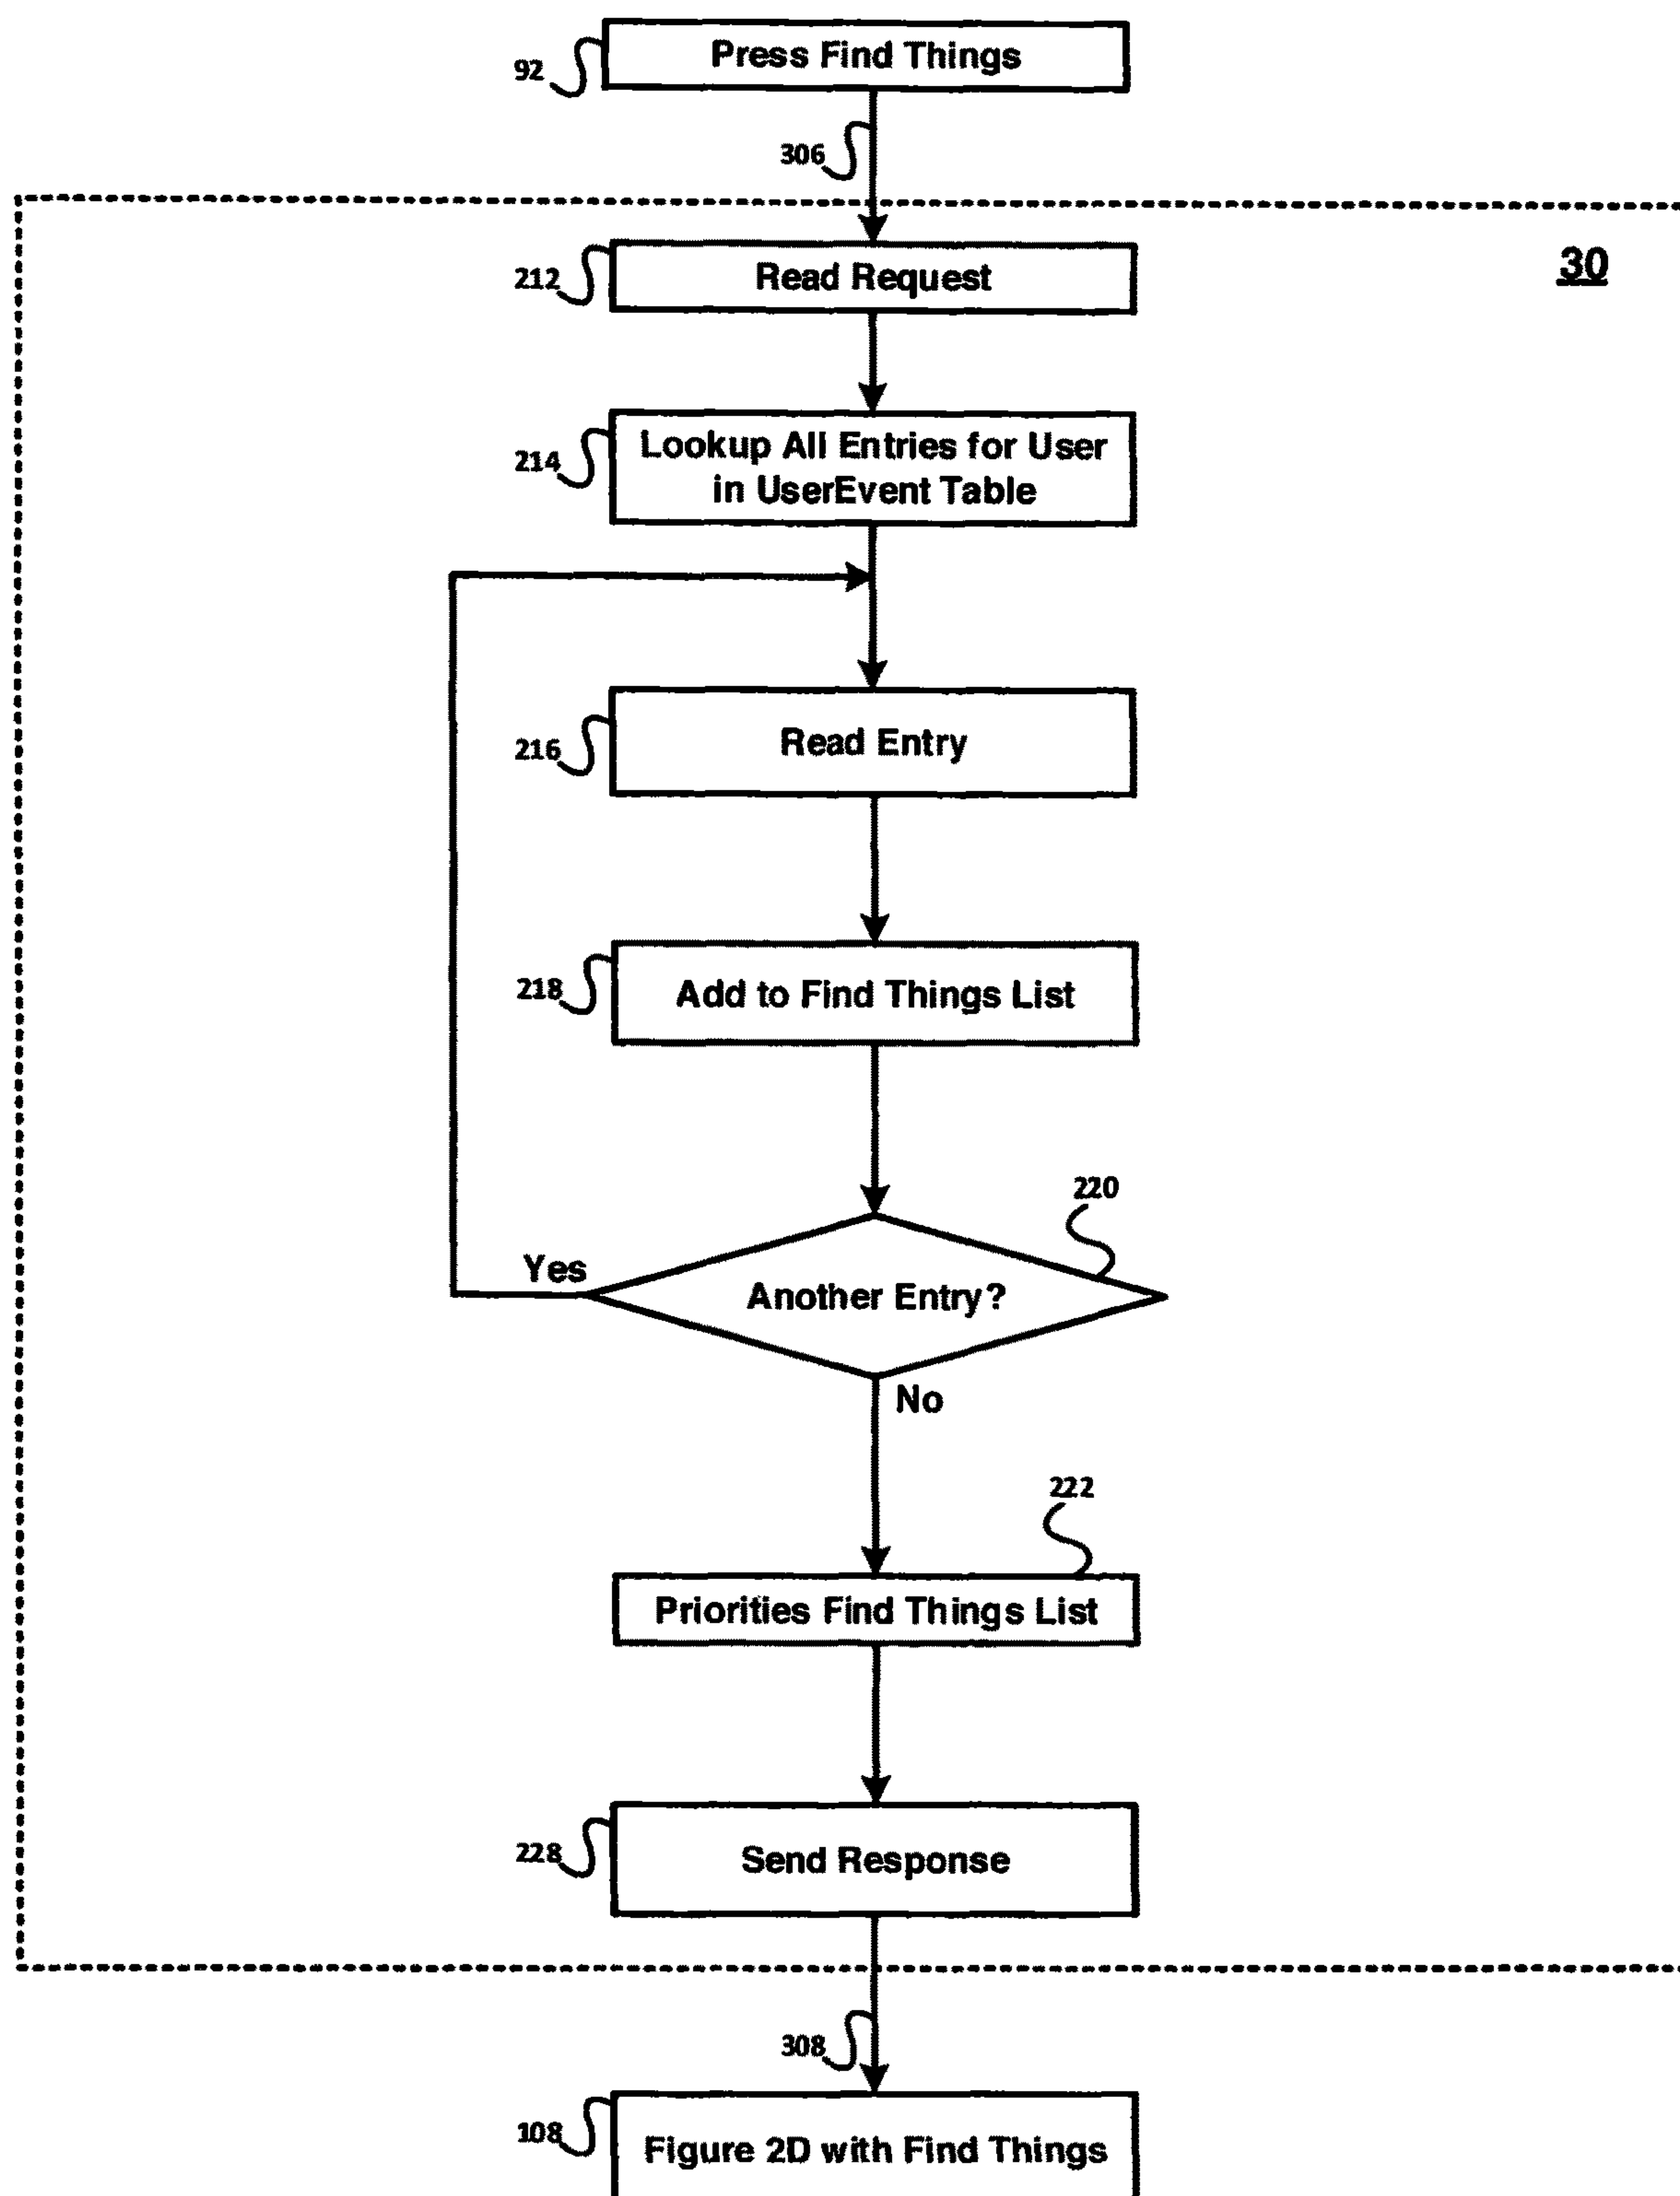


FIGURE 17

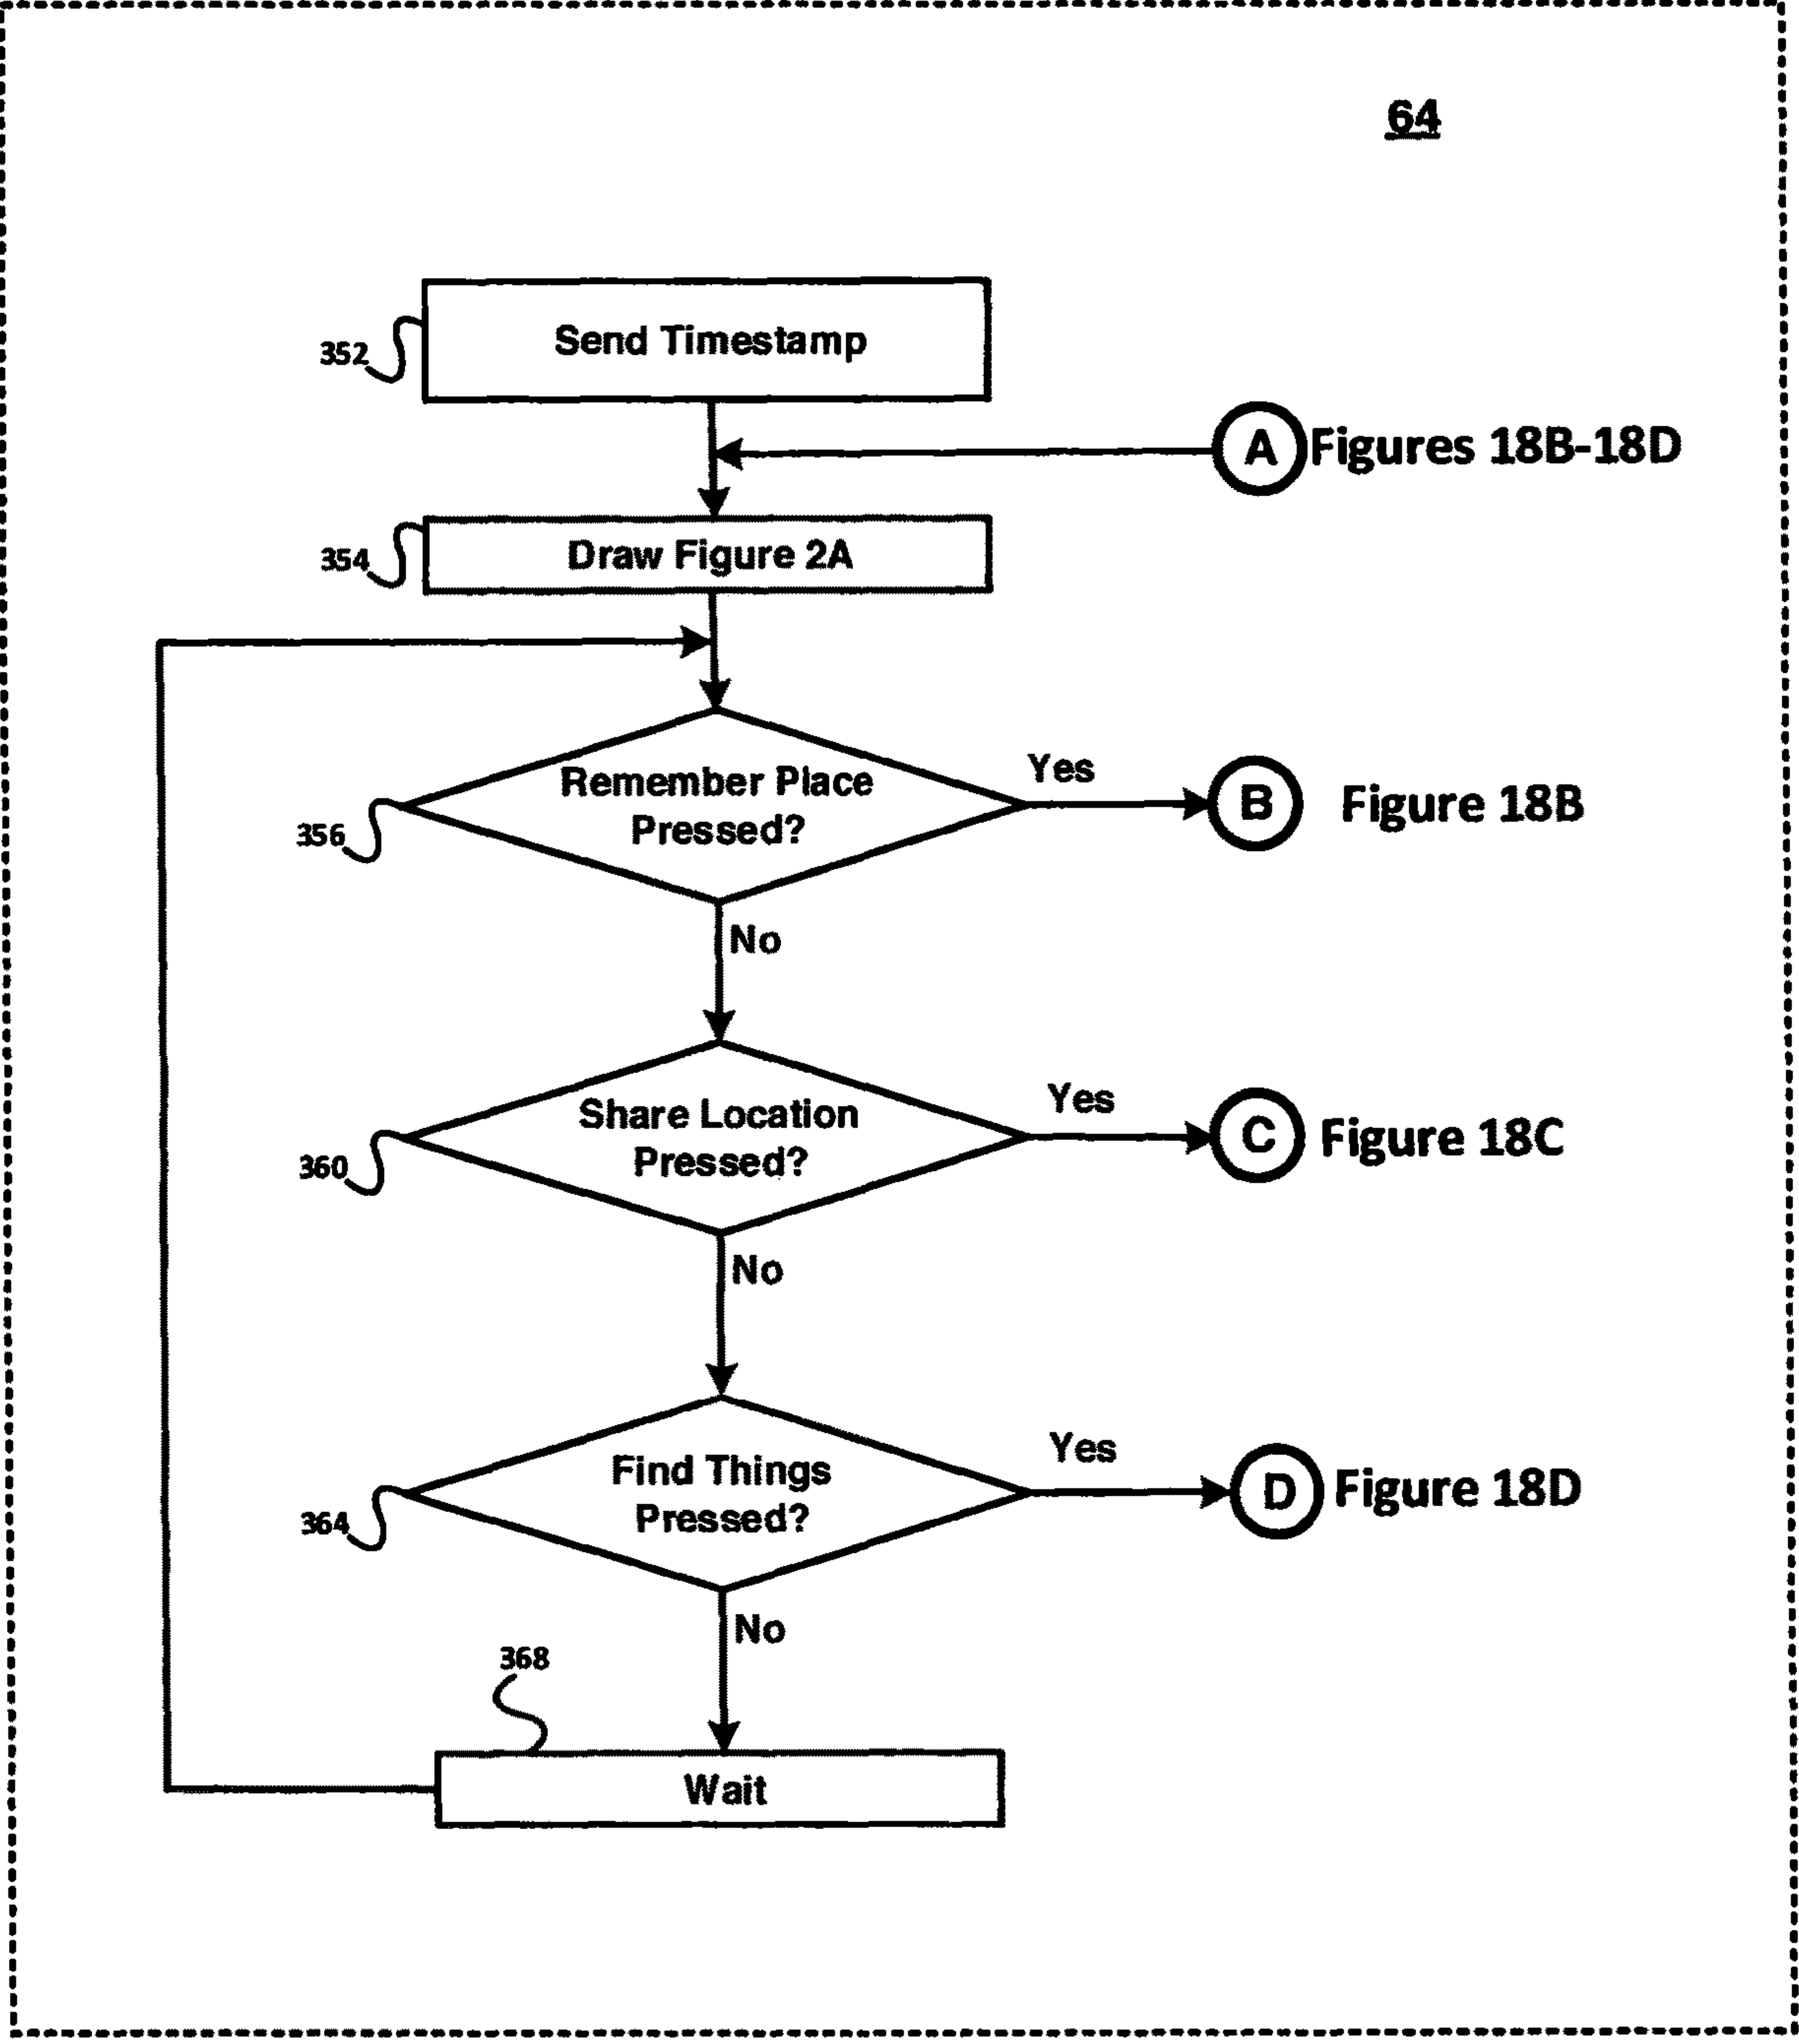


FIGURE 18A

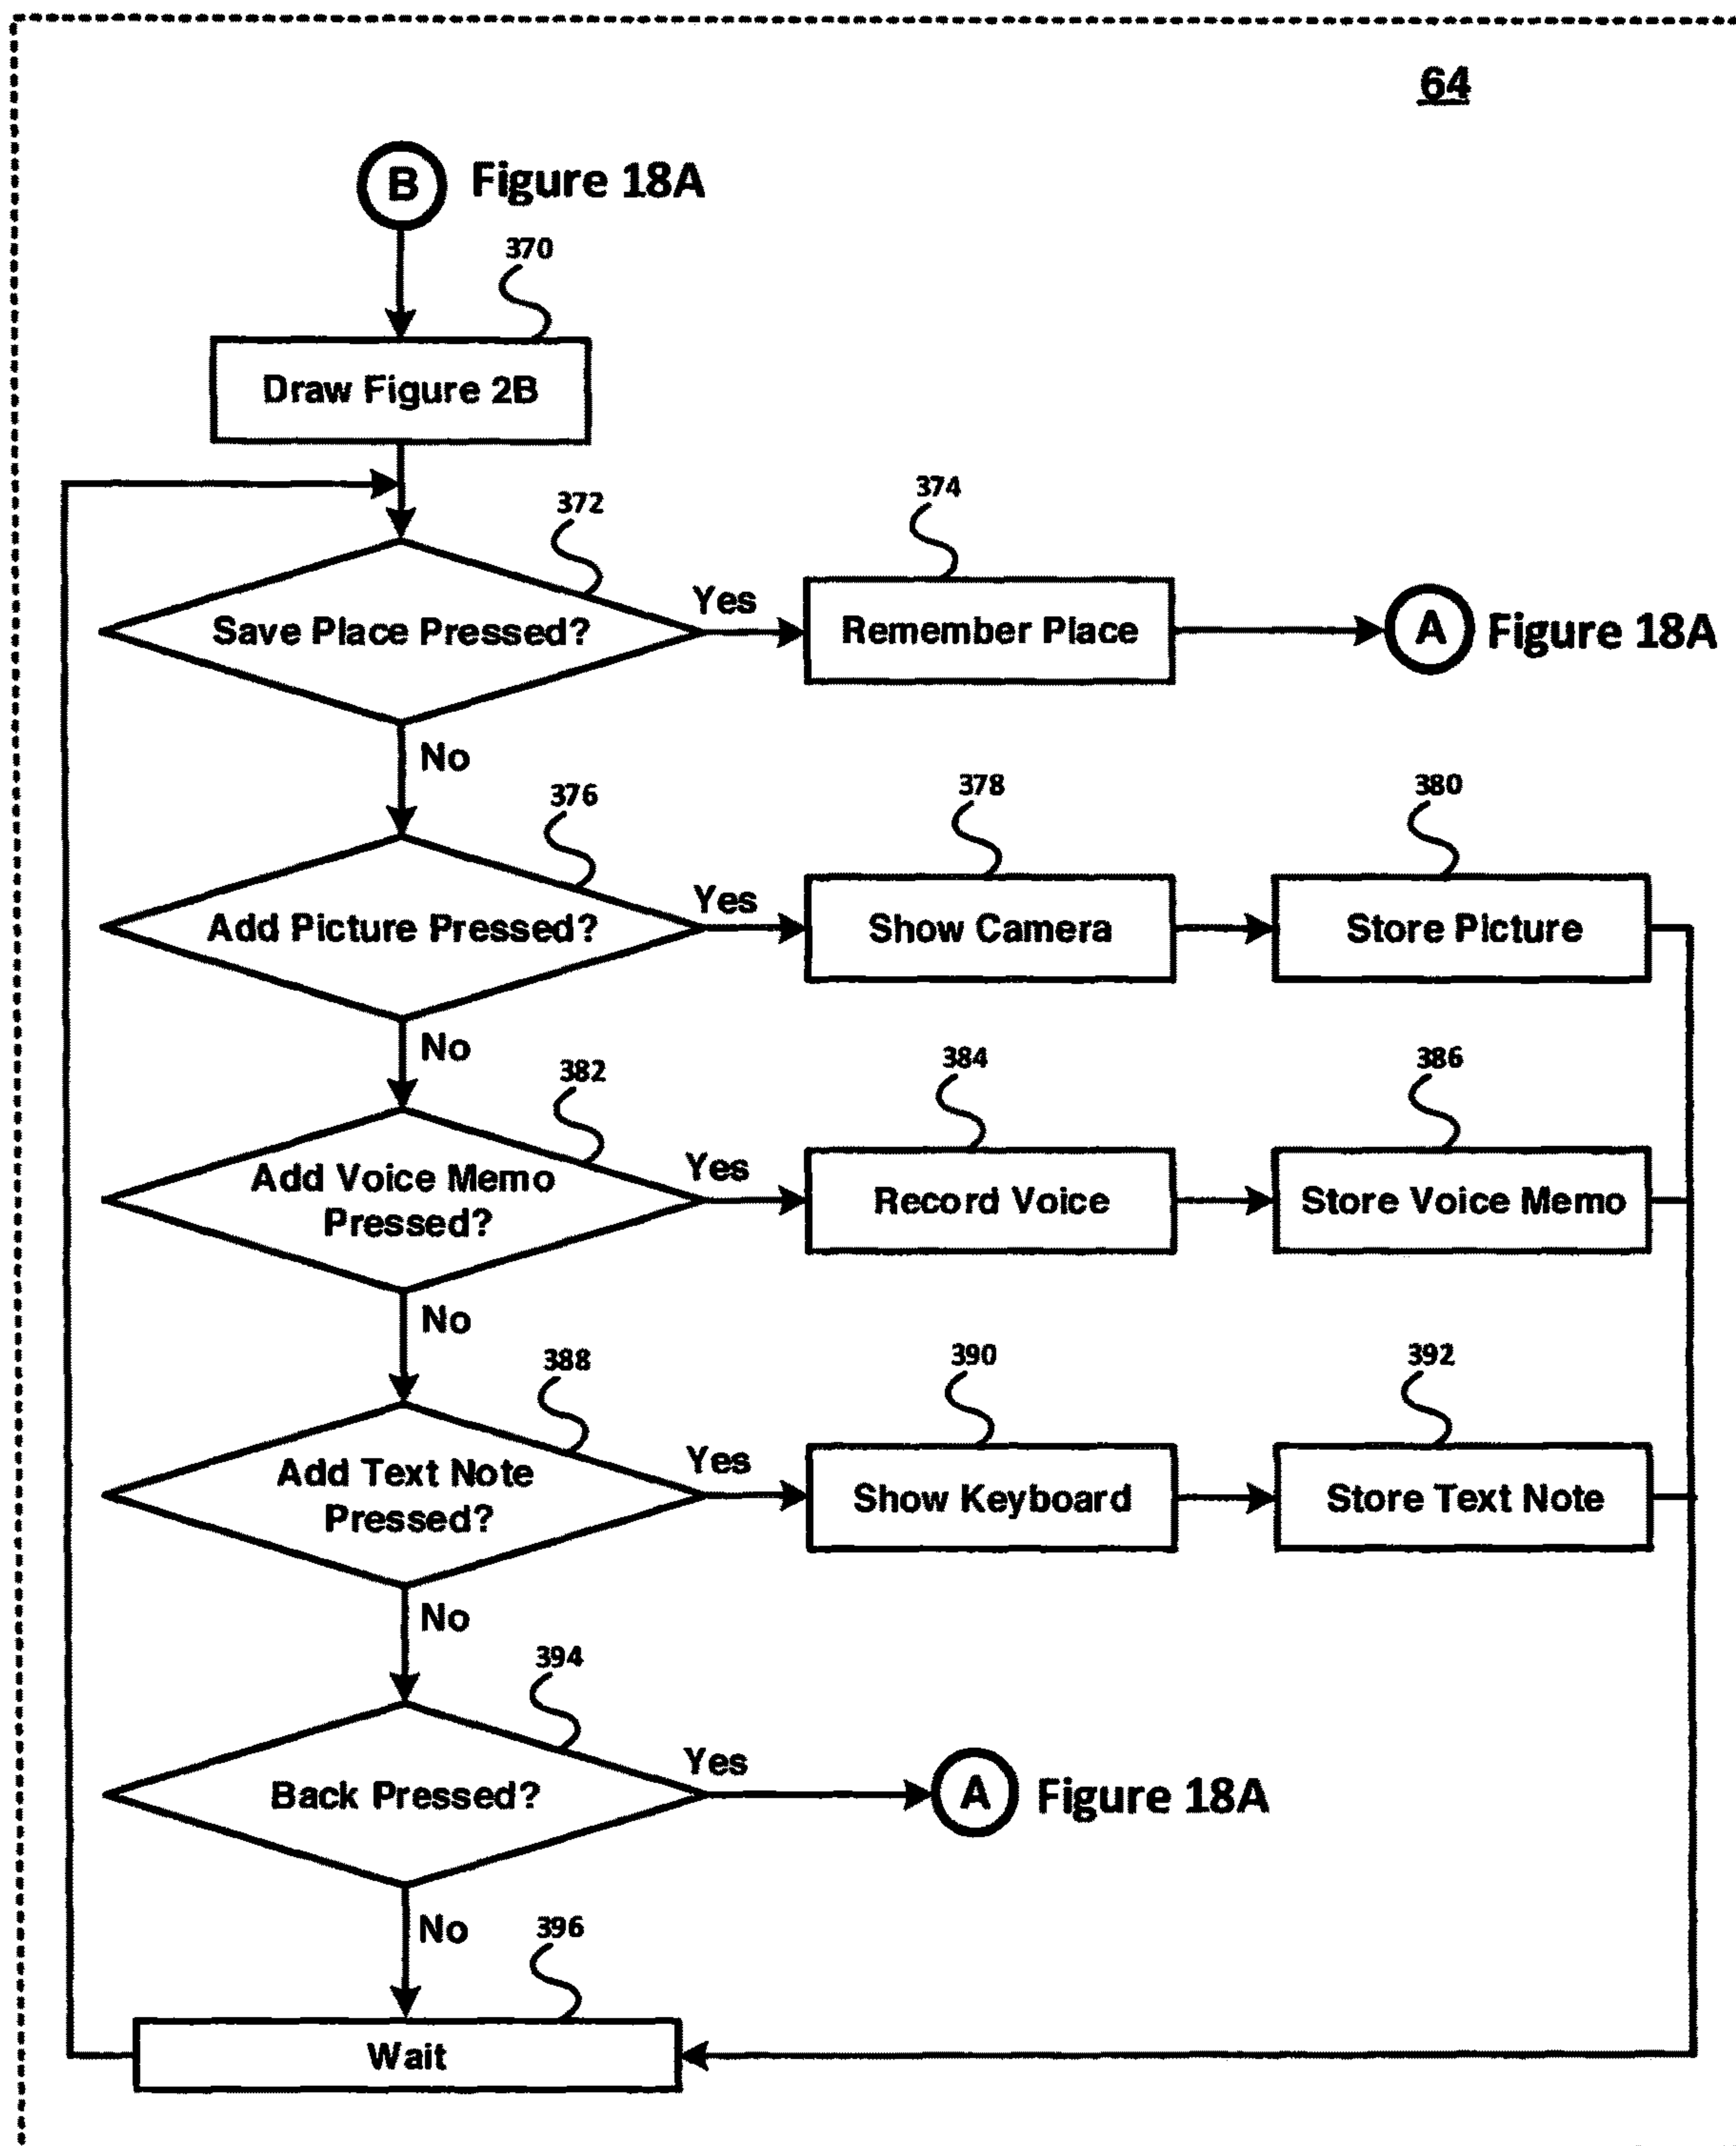


FIGURE 18B

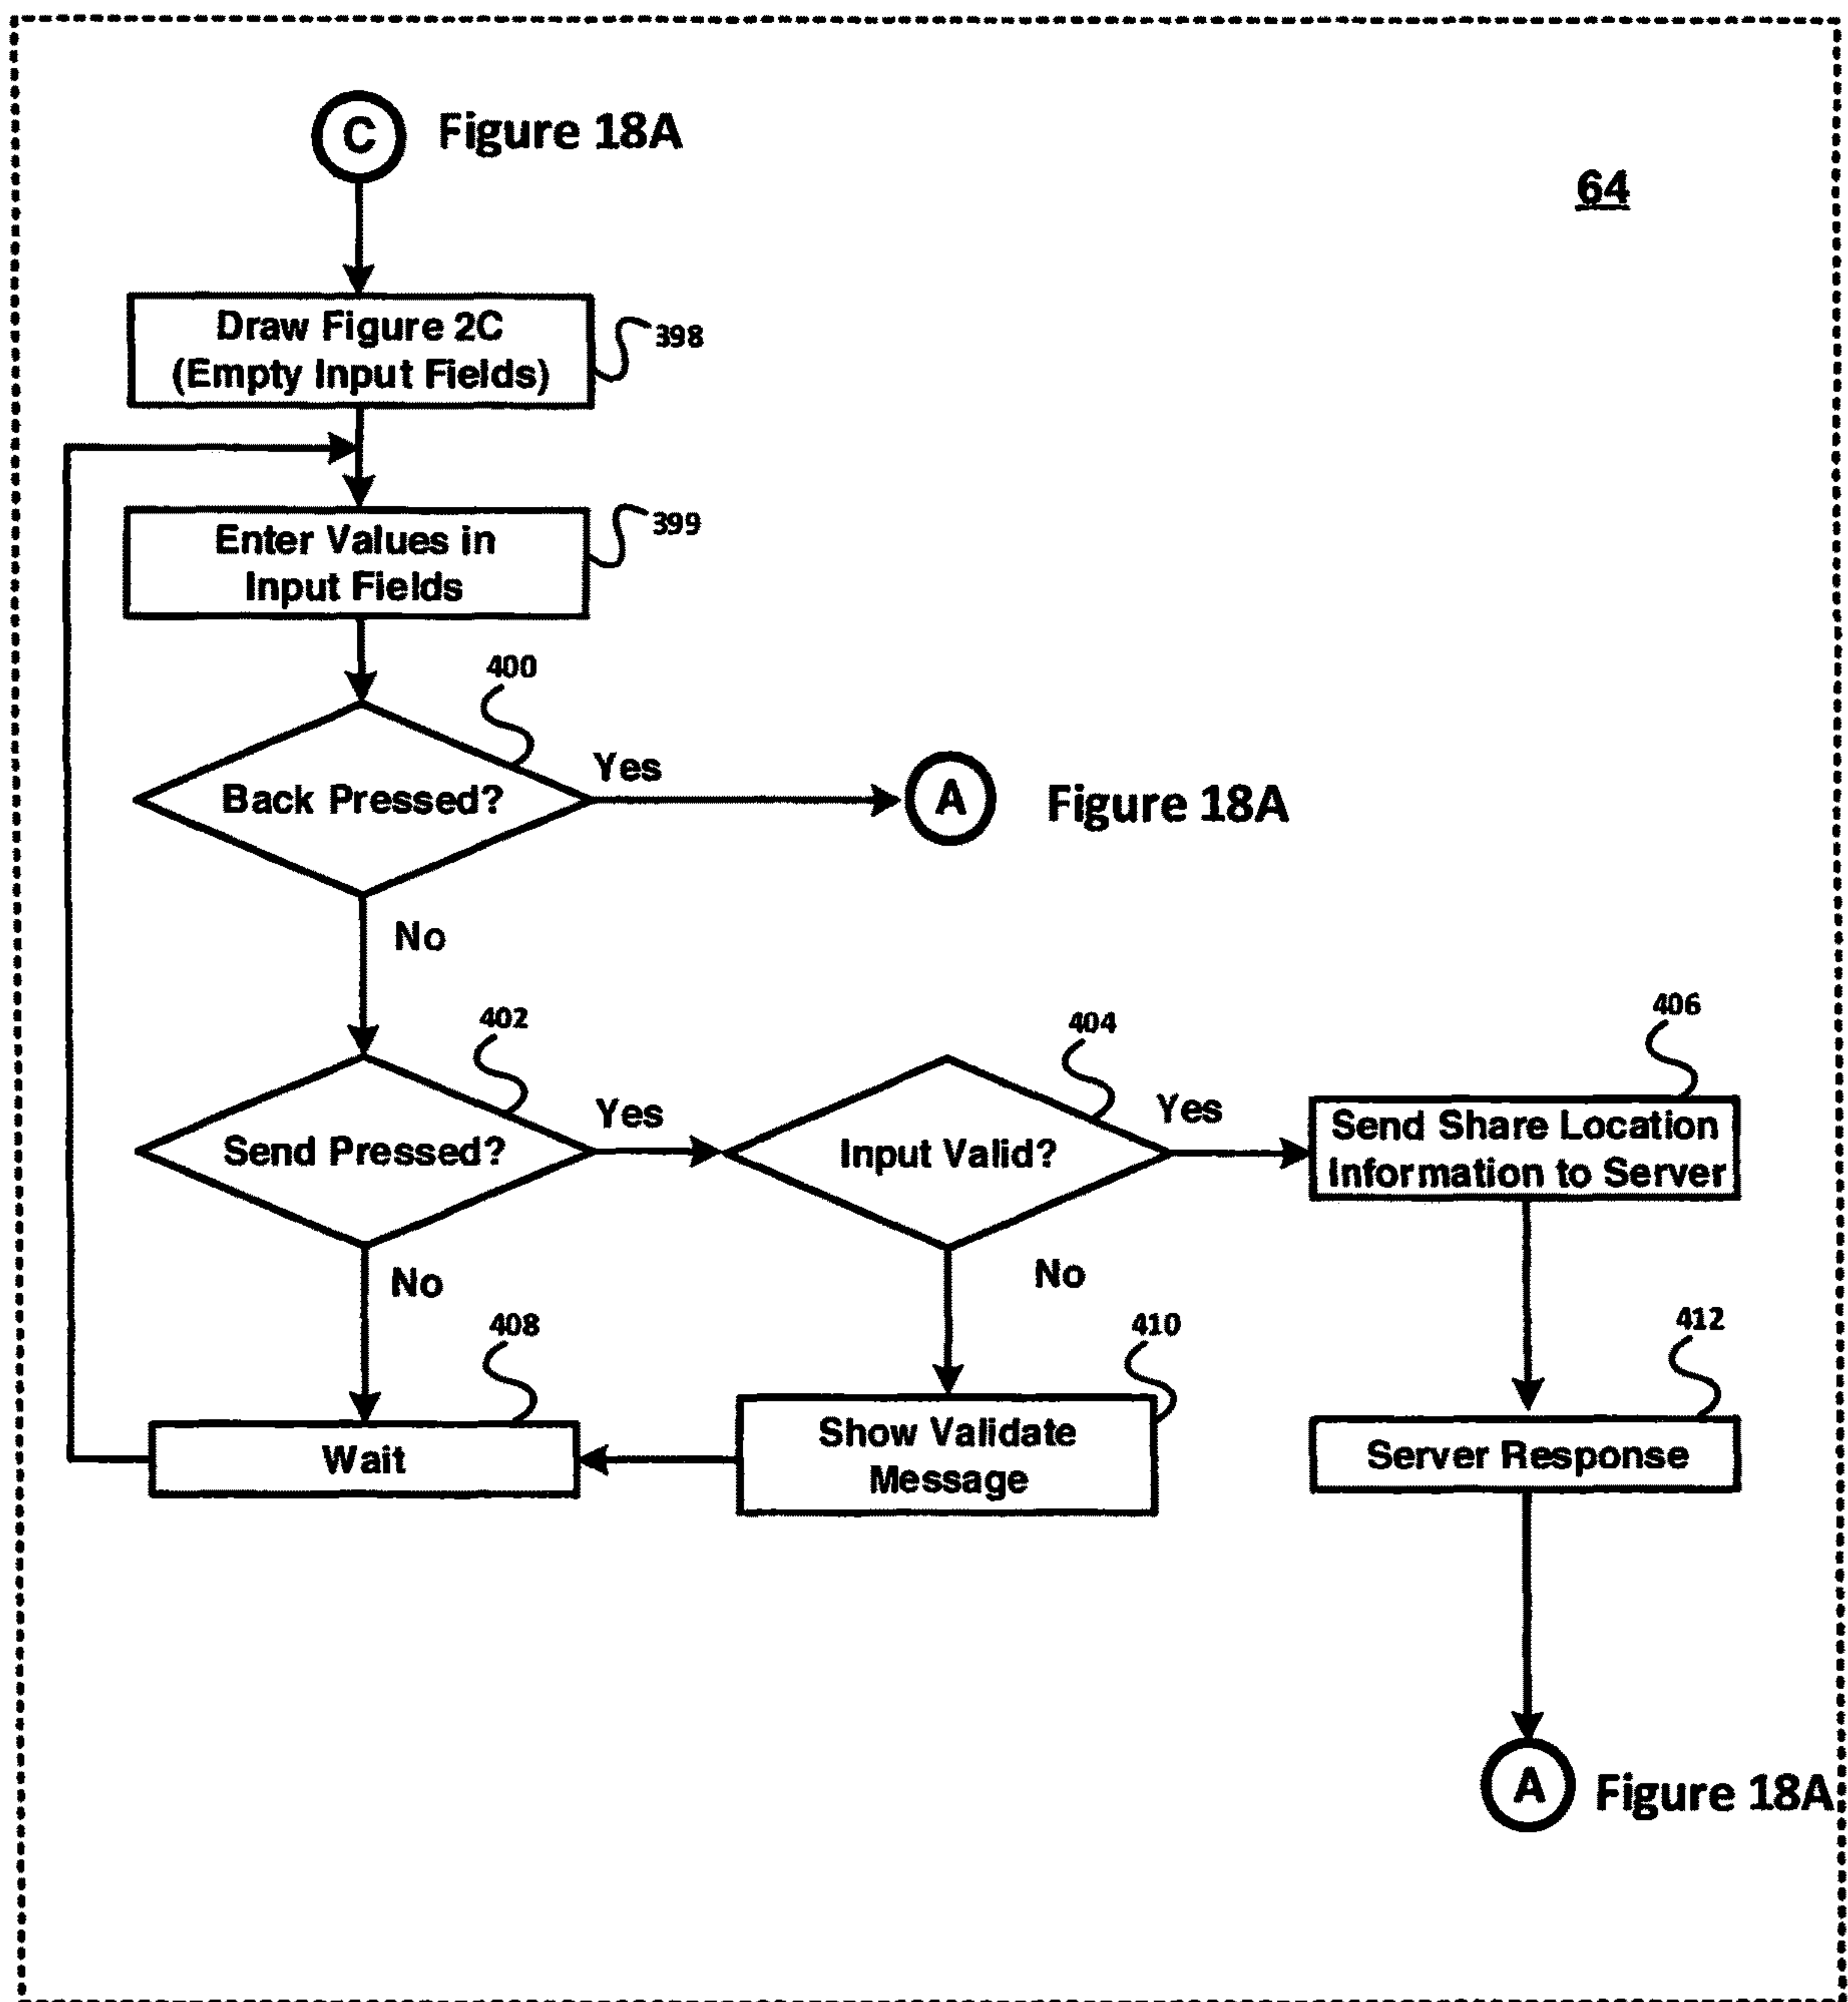


FIGURE 18C

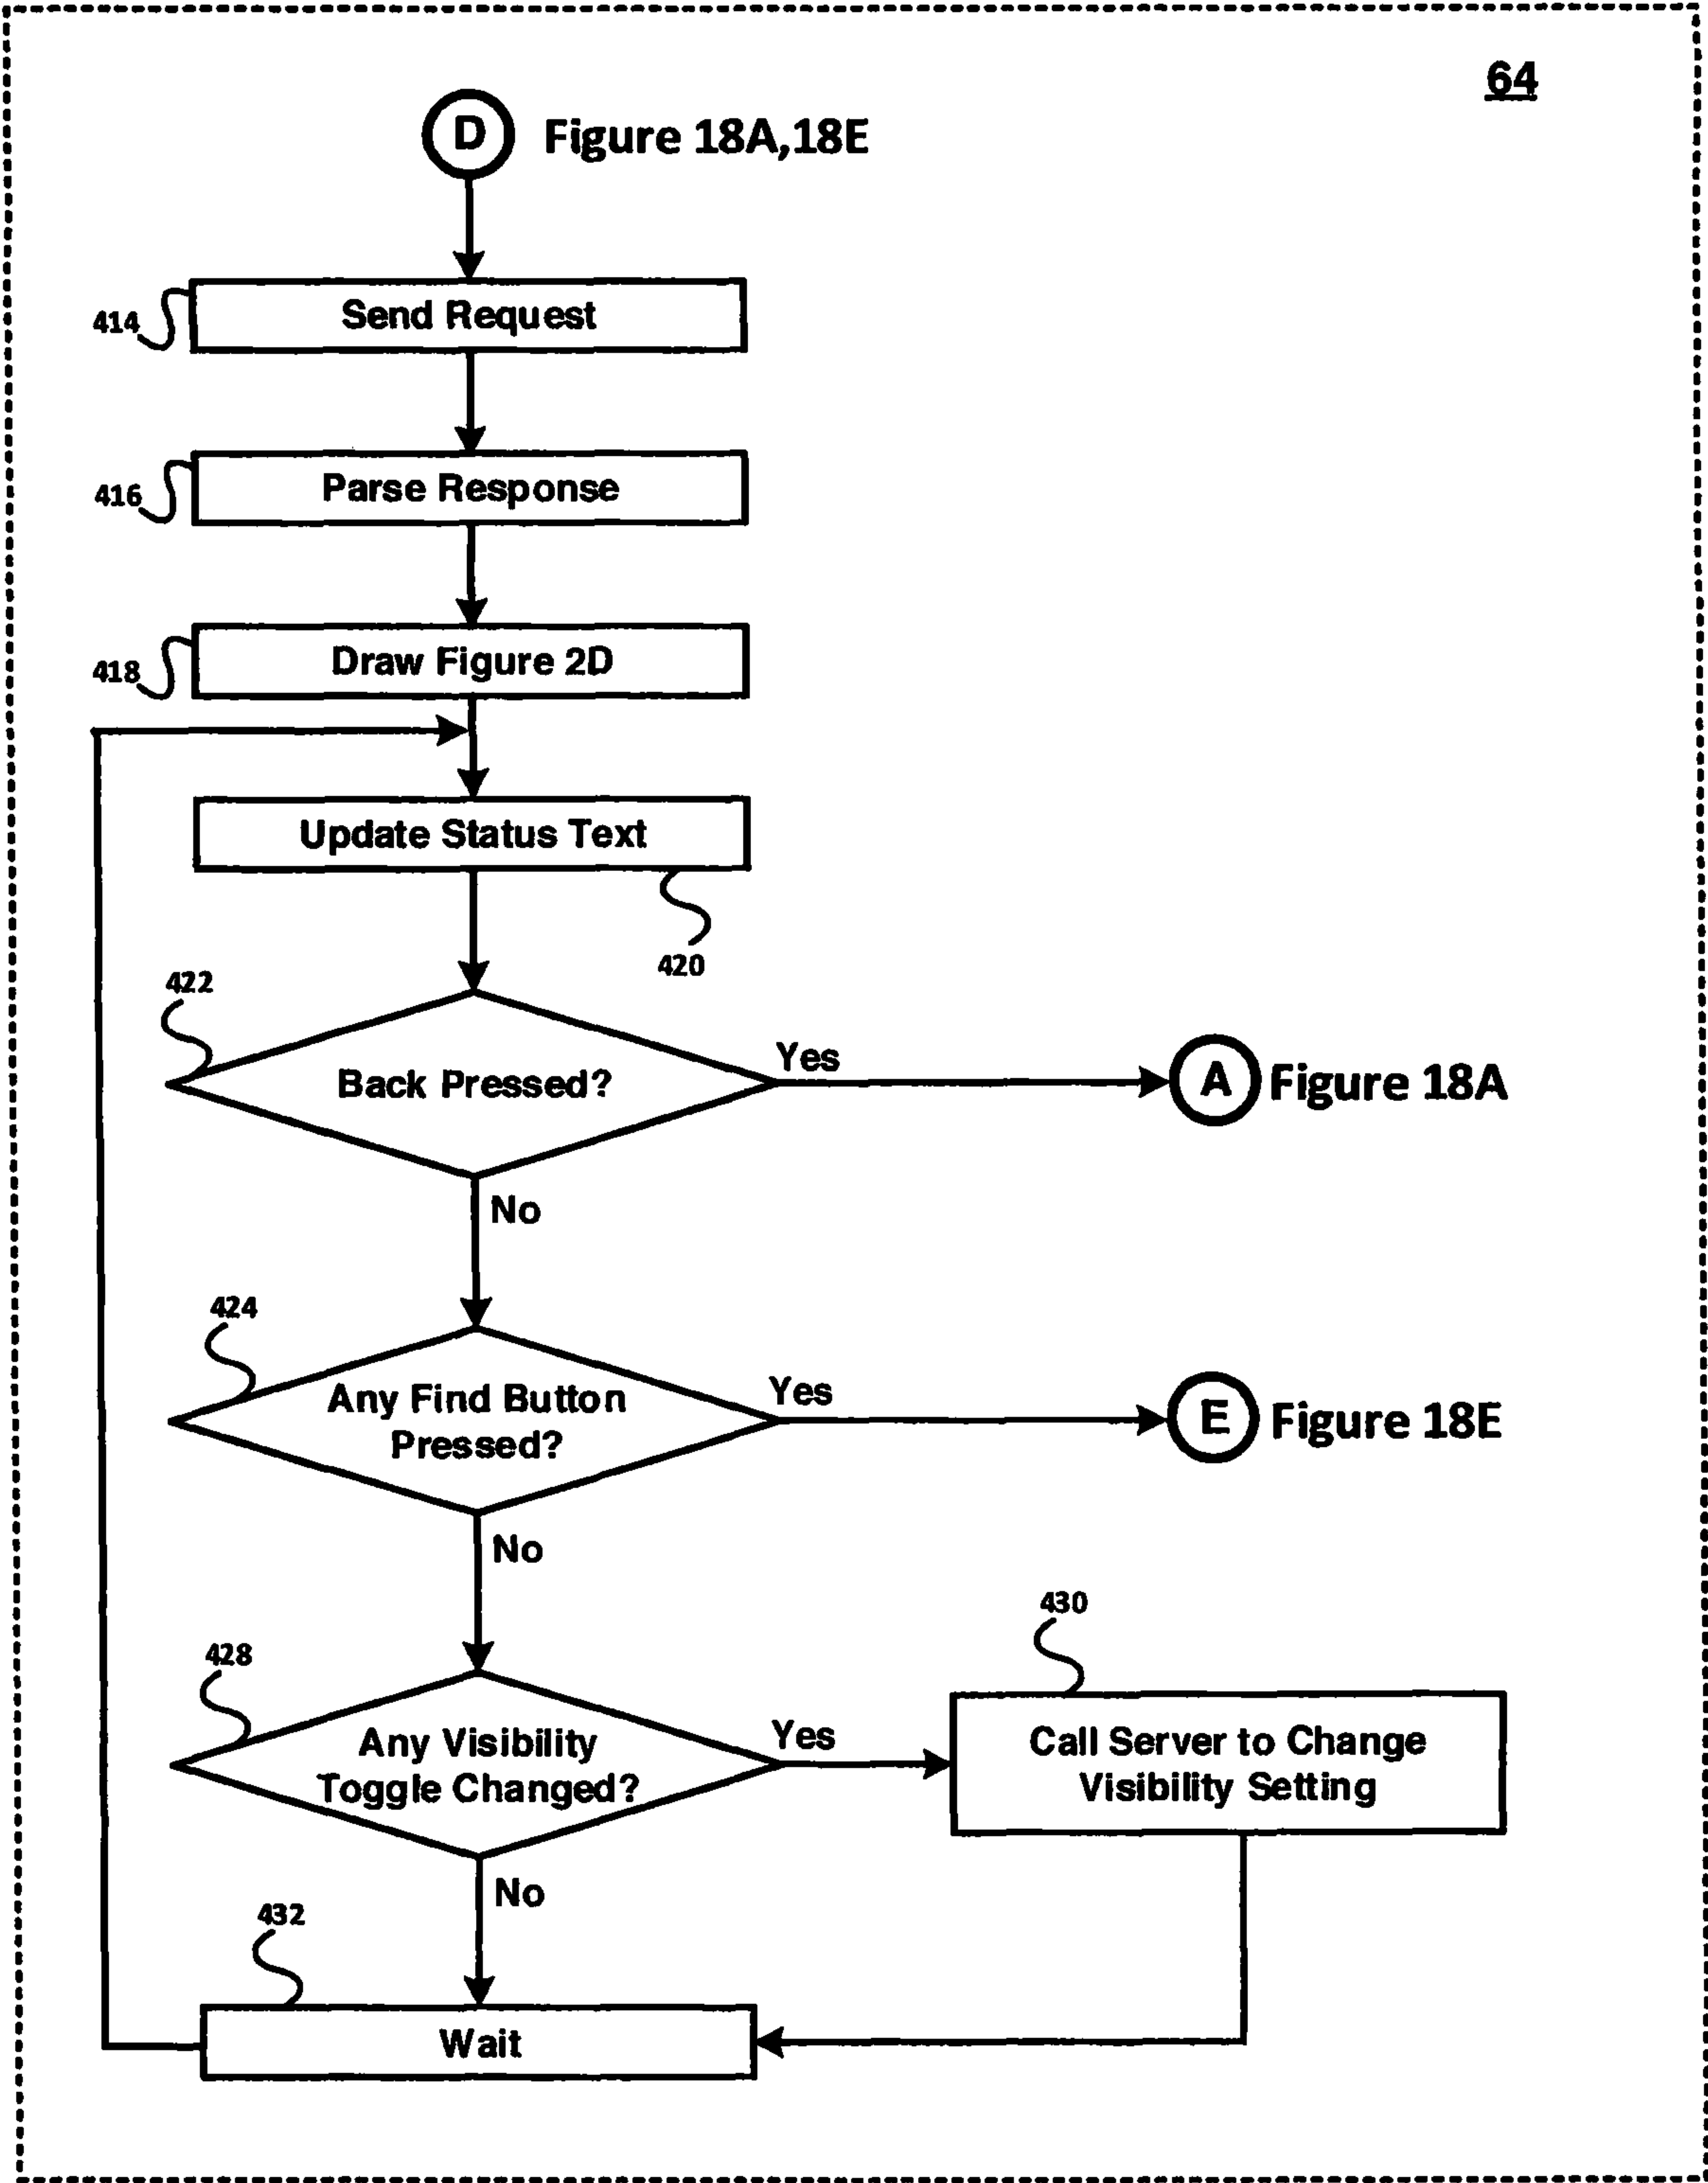


FIGURE 18D

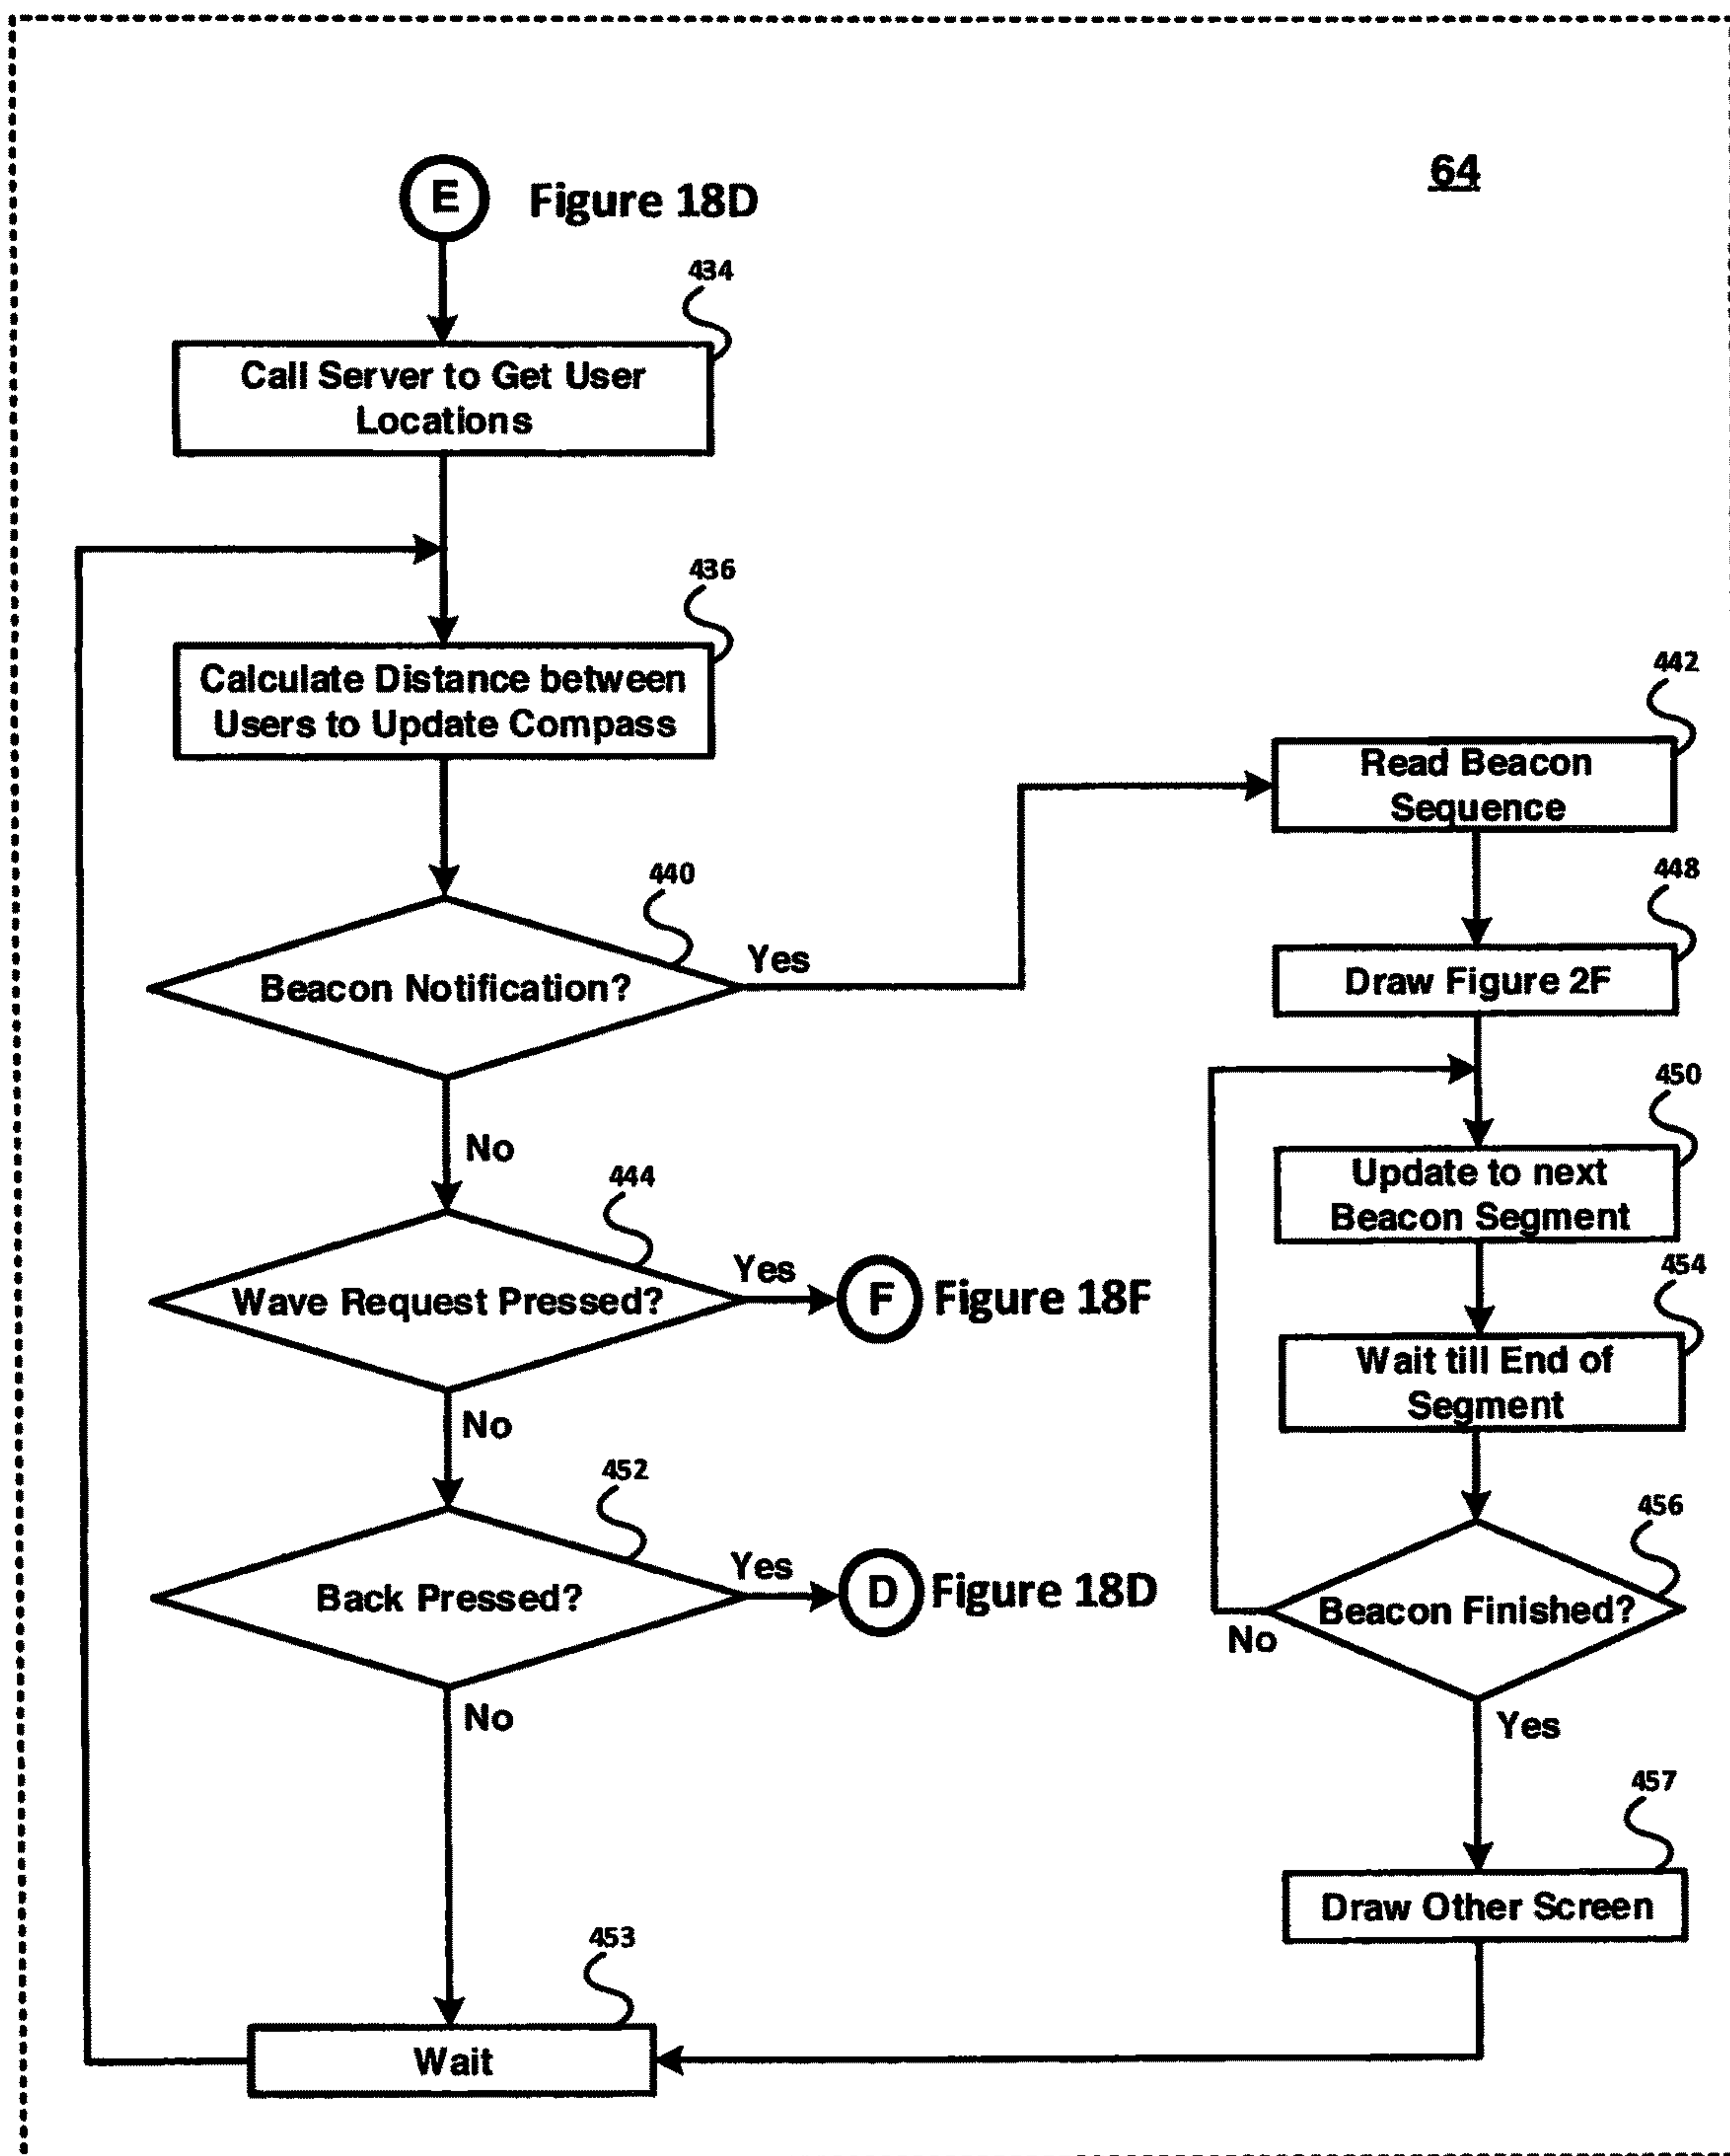
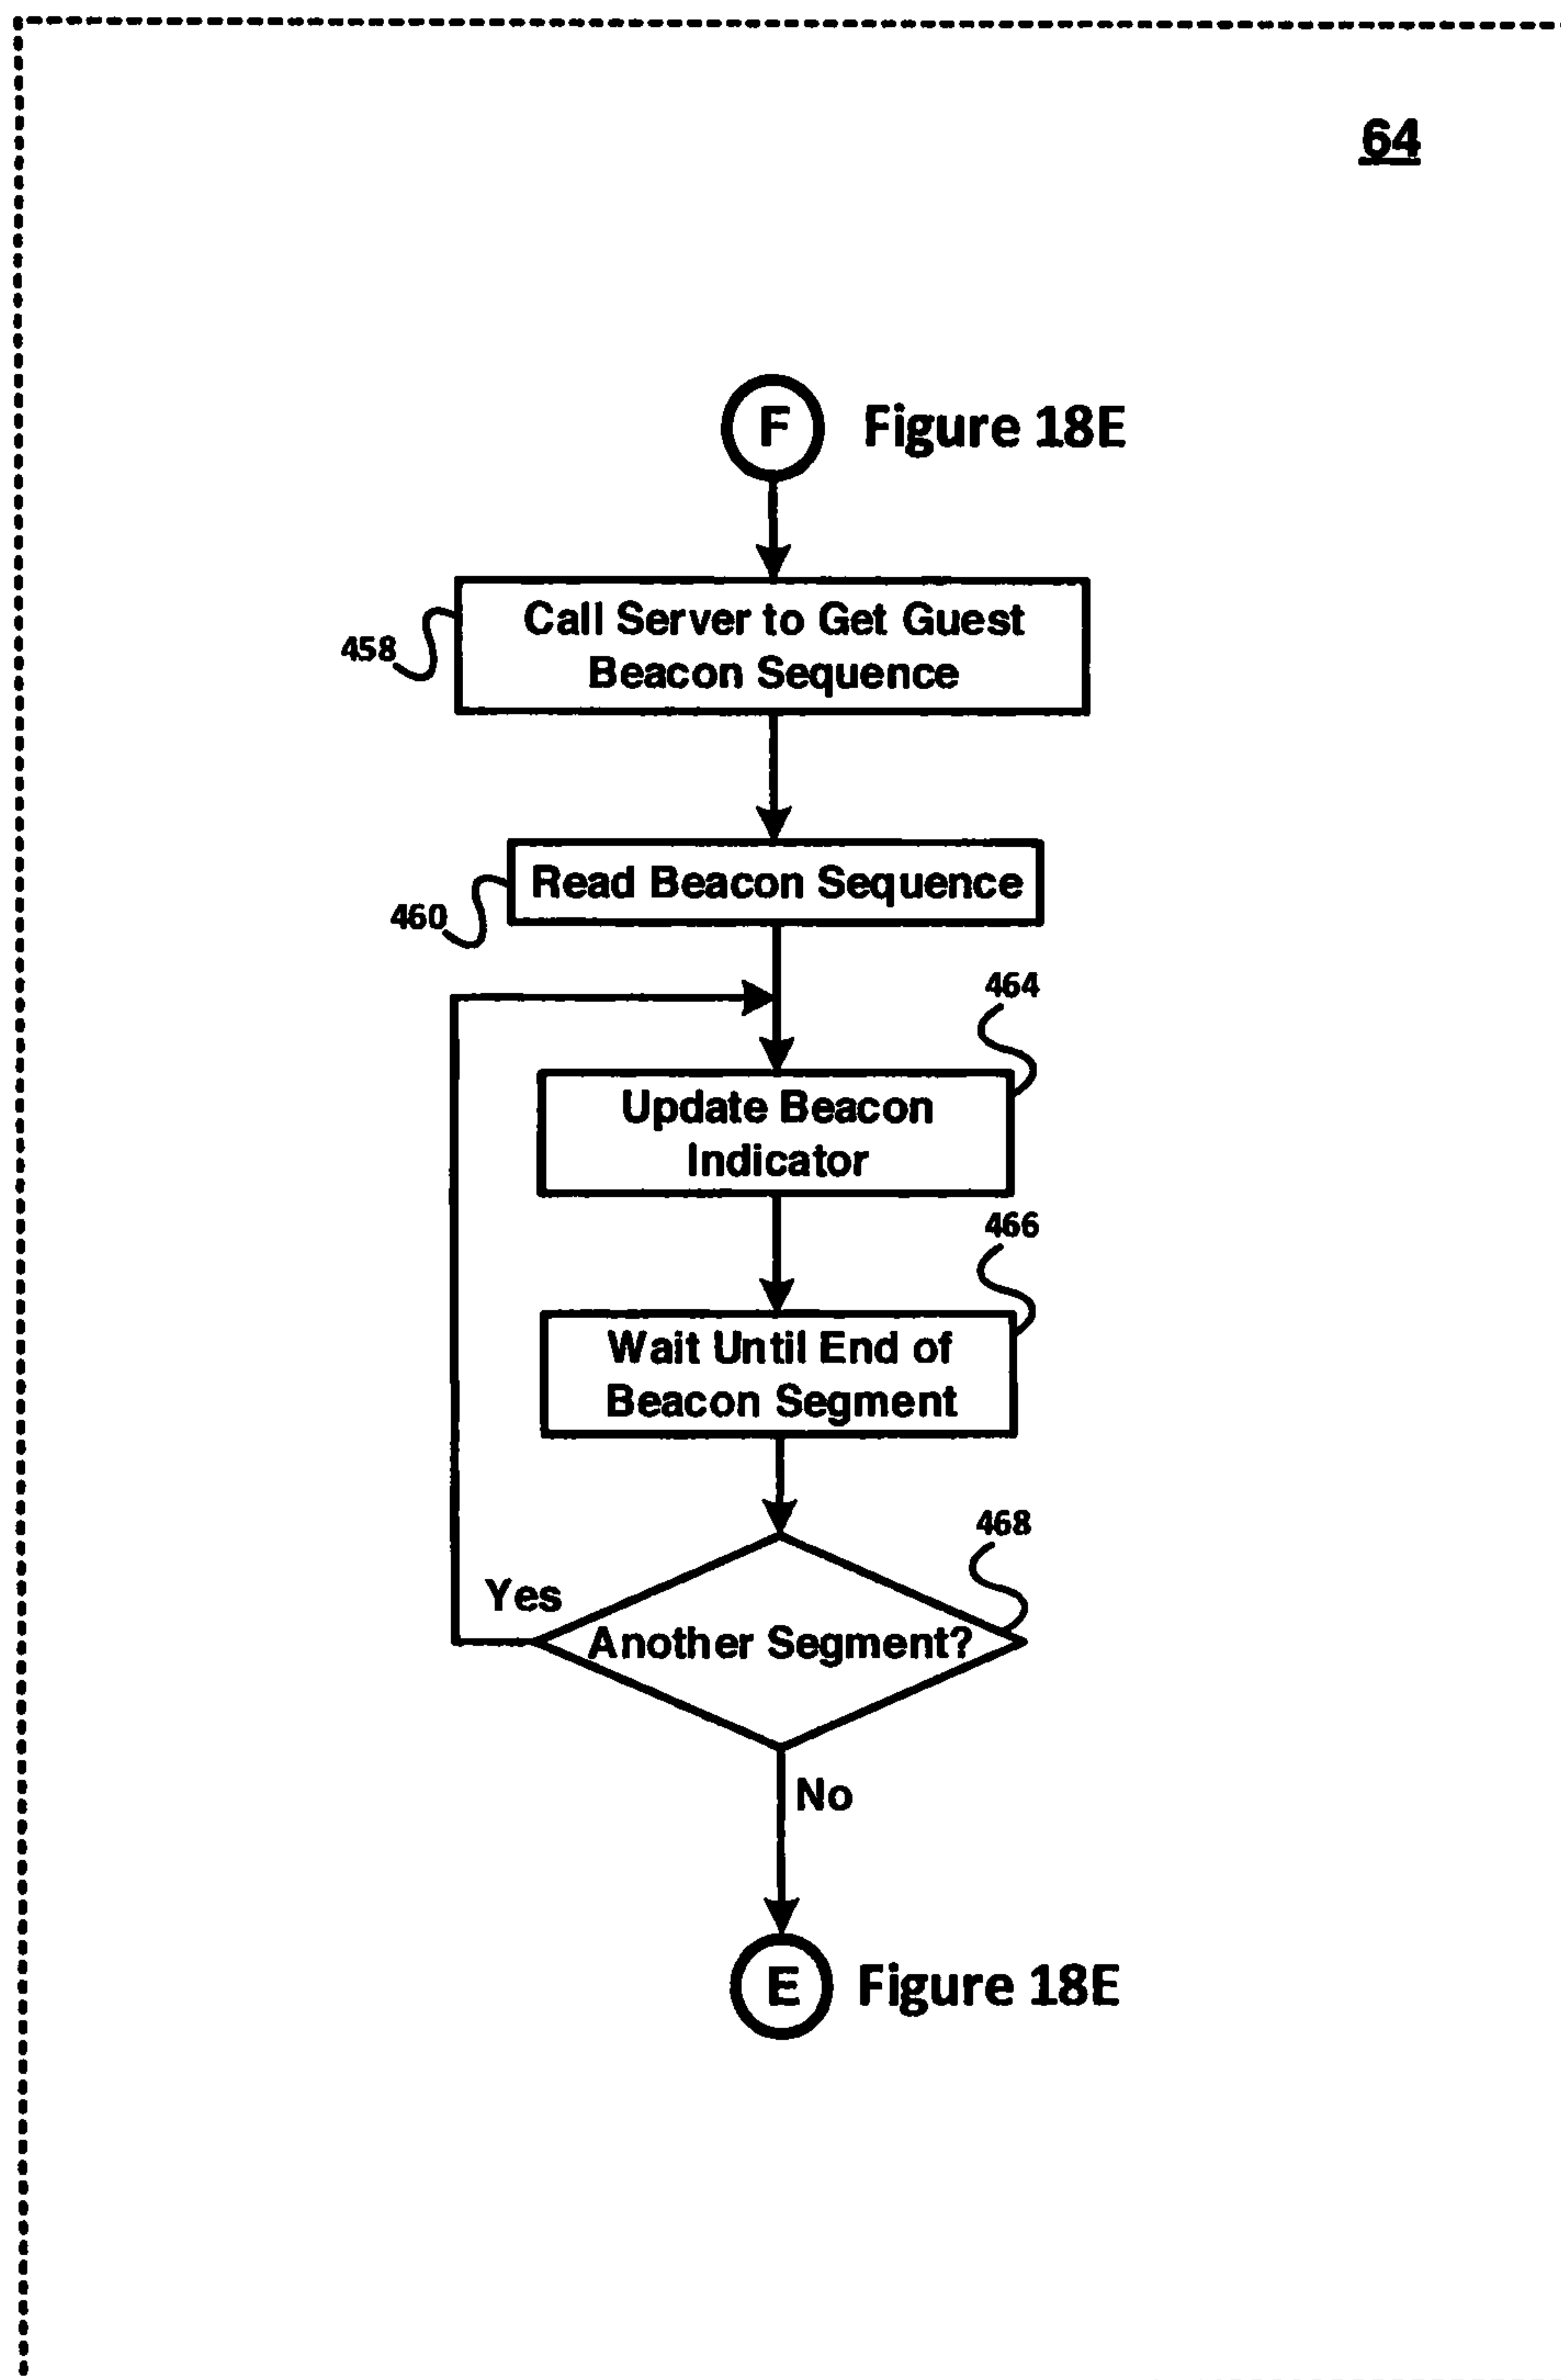


FIGURE 18E

**FIGURE 18F**

1

**METHODS ON MOBILE DEVICES TO
LOCATE PERSONS**

This application is a continuation of U.S. application Ser. No. 16/048,305, now U.S. Pat. No. 10,455,359, which was filed on Jul. 29, 2018, which is a continuation of U.S. application Ser. No. 15/096,258, which was filed on Apr. 11, 2016, now U.S. Pat. No. 10,057,719, which is a continuation of U.S. application Ser. No. 14/092,846, which was filed on Nov. 27, 2013, now U.S. Pat. No. 9,344,849, which are all incorporated by reference herein.

BACKGROUND

This invention relates to methods and systems for locating persons and places using mobile devices.

People attend events where they want to meet up with friends and acquaintances. If there is a large crowd at the event, it can be difficult for people to locate each other. Sometimes last minute changes in plans also prevent meeting up. Other times the problem is finding exactly where one parked the car after the event. Because many people carry mobile devices (e.g., cellphones), it would be useful to provide methods and systems for locating persons and places that could be implemented with mobile devices in these and other circumstances.

SUMMARY OF THE INVENTION

This invention relates to systems and methods for locating persons and place with mobile devices. In a feature, the invention is a method implemented in a server for providing beaconing sequences for location sharing to mobile devices. In a feature, the invention is a server executing a method of locating a user using a beaconing mobile device. In another feature, the invention is a non-transitory computer readable medium on a server that encodes a program to execute a method on a first mobile device that determine directions and/or distance between the first mobile device and a second mobile device. In a feature, the invention is a server executing a method to remember a place on a mobile device. In still another feature, the invention is a system for providing beaconing sequences for location sharing to mobile devices.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a network diagram that illustrates N mobile devices communicating with N servers.

FIGS. 2A-2F illustrate the user interfaces of a mobile device.

FIG. 3 illustrates user interactions and communications among the mobile devices and the servers.

FIG. 4 illustrates a second mobile device user locating a first mobile device user in a crowd using the compass feature.

FIG. 5 is a perspective view of a second mobile device user locating a first mobile device user in a crowd using a compass.

FIG. 6 is a perspective view of a second mobile device user locating a first mobile device user in a crowd using the compass on a smart watch or an electronic wearable.

FIG. 7 illustrates a second mobile device user locating a first mobile device user by using a beaconing mobile device in a crowd with other users.

FIG. 8 is a perspective view of a second mobile device user locating a first mobile device user in a crowd by using the beaconing mobile device.

2

FIG. 9 illustrates beaconing sequences used in FIGS. 7-8.

FIG. 10 illustrates a variety of beaconing sequences.

FIG. 11 illustrates assigning beaconing sequences by location cells.

FIG. 12 illustrates some beaconing sequences that could be used in location cells.

FIG. 13 illustrates assigning beaconing sequences by venue.

FIG. 14 illustrates examples of beaconing sequences that could be used in FIG. 13.

FIG. 15 illustrates a flow diagram for the beaconing logic that runs on the server of FIGS. 1 and 3.

FIG. 16 illustrates a flow diagram for the message logic that runs on the server of FIGS. 1 and 3.

FIG. 17 illustrates a flow diagram for the event logic that runs on the server of FIGS. 1 and 3.

FIG. 18A-18F is a set of flow diagrams that illustrate the application logic that runs on the mobile device and interacts with the server.

**DETAILED DESCRIPTION OF PREFERRED
EMBODIMENTS**

The following description includes the best mode of carrying out the invention. The detailed description illustrates the principles of the invention and should not be taken in a limiting sense. The scope of the invention is determined by reference to the claims. Each part (or step) is assigned its own part (or step) number throughout the specification and drawings. Because some flow diagrams don't fit on a single drawing sheet, we use capital letters (e.g., "A") to show how the flow diagrams connect (e.g., "A" connects the flowcharts of FIGS. 18A-18D).

FIG. 1 is a network diagram that illustrates N mobile devices communicating with N servers. The network diagram illustrates a system that includes the first mobile device 74, the second mobile 76, the third mobile device 80 up to the Nth mobile device 84. The communication links 72, 78, 82, and 86 connect the first mobile device 74 through Nth mobile device 84 to the computer network 40 that connects to a first server 10 through a communication link 36, a second server 26 through a communication link 22, and a Nth server 38 through a communication link 39.

We now discuss the first server 10 and the second server 26 to illustrate the software and hardware components that can be used to implement the invention.

The first server 10 illustrates the software components. The first server 10 includes a web server 34 that will listen for requests and pass them along to an email server 35, beacon logic 32 (FIG. 15), message logic 28 (FIG. 16), event logic 30 (FIG. 17) that the first server 10 executes during operation of the system. A backplane 20 links the first server 10, a database and storage 24, the second server 26, and the Nth server 38.

The second server 26 has the same software components (not shown) and illustrates hardware for the first server 10 through Nth server 38. It includes a CPU-memory bus 14 that communicates with a processor 12. The second server 26 includes memory 16 coupled to the processor 12 and interfaces 18 that connect through a communication link 22 to the network 40.

Data is defined as including user data, instructions, and metadata. Inputting data is defined as the input of parameters and data from user input, computer memory, and/or storage device(s).

A processor could be any suitable general purpose processor running software. For example, the processor could

be one or more multicore processors made by Intel or licensed by ARM, and AMD. In another example, we could use a low cost single board computer processor such as Raspberry Pi. The arrangement and type of the processors is not essential to the invention.

Hennessy and Patterson, *Computer Architecture: A Quantitative Approach* (2006), and Patterson and Hennessy, *Computer organization and Design: The Hardware/Software Interface* (2007) describe computer hardware and software, storage systems, and networks and are incorporated by reference.

Each server may run an operating system such as Linux, UNIX, a Windows OS, or another suitable operating system. Tanenbaum, *Modern Operating Systems* (2008) describes operating systems in detail and is hereby incorporated by reference. Bovet and Cesati, *Understanding the Linux Kernel* (2005), and Bach, *Design of the Unix Operating System* (1986) describe operating systems in detail and are incorporated by reference herein.

In an embodiment, each server could be implemented on a virtual machine hosted by VMware, Hyper V, or open source software Xen. Lowe et al. *Mastering VMware vSphere 5.5* (2013) describes the VMware virtualization software in detail and is incorporated by reference herein. Matthews et al., *Running Xen: A Hands-On Guide to the Art of Virtualization* (2008) describes the free open source Xen virtualization software in detail and is incorporated by reference herein.

In a typical environment, the server will be implemented by hundreds even thousands of computers in a data center such as Amazon Web Services, Google Compute Engine, Microsoft Azure, or Rackspace. It is not essential to the invention that a particular data center be used. Murry, *Programming Amazon Web Services: S3, EC2, SQS, FPS, and SimpleDB* (2008) describes the Amazon Web Services in detail and is incorporated by reference herein. Sanderson, *Programming Google App Engine* (2012) describes the Google App Engine in detail and is incorporated by reference herein.

In an alternative embodiment, the server will be implemented using low cost single board computers such as Raspberry Pi that runs locally in the geographic area and/or near the mobile devices and communicates with the mobile devices using, for example, network protocols such as Bluetooth (e.g., low energy Bluetooth), Wi-Fi, or TCP/IP. Halfacree, *Raspberry Pi User Guide* (2012) describes this single board computer in detail and is incorporated by reference herein.

The database and storage 24 stores the user and event information and communicates with the first server 10, the second server 26, and the Nth server 38. A non-transitory computer-readable medium (e.g., storage device, DVD, USB storage device) can be used to encode the software program instructions described in the methods below. Rockoff, *The Language of SQL: How to Access Data in Relational Databases* (2010) describe SQL databases in detail and is incorporated by reference herein. Redmond et al., *Seven Databases in Seven Weeks* (2012) describe non-SQL databases in detail and is incorporated by reference herein.

A first mobile device 74 (e.g., a cell phone, a tablet, a smart watch, electronic wearable clothing, or glasses) includes an application 64, including a communication interface 66, application logic 68, and a user interface 70.

The communication interface 66 includes a conventional network interface that enables the first mobile device 74 to communicate through a link 72 to a computer network 40, which includes the cellular phone network (e.g. AT&T,

Verizon, Sprint, NTT DoCoMo, Orange, and China Mobile) and/or the Internet. Tanenbaum, *Computer Networks* (2010) describes computer networks in detail and is incorporated by reference herein.

5 The user interface 70 defines a set of graphical user interfaces that will be displayed on the screen of the mobile device 74 as shown in FIGS. 2A-2F.

The application logic 68 defines the state of the application (e.g., what screen is being displayed and the mobile device beacon state), stores inputs such as locations of mobile devices obtained from the servers of the computer network 40, and calculates the relative distances and directions of the mobile devices.

The application logic 68 can be written in a variety of languages. For example, if the mobile device is an Apple device the language would be Objective-C. Kochan, *Programming in Objective-C* (5th Edition)(Developer's Library)(2012) describes Objective-C in detail and is incorporated by reference herein. For example, if the mobile device is Android device the language could be Java. Mednieks, *Programming Android: Java Programming for the New Generation of Mobile Devices* (2012) describes Android programming in detail and is incorporated by reference herein.

20 The first mobile device 74 has a location determination component 52 that determines the location of the first mobile device 74 by using a variety of sources. For example, a global positioning system (GPS) 42 and cell tower 44 are suitable as long range sources. For shorter range location determination, Wi-Fi 46, Bluetooth 48, including Bluetooth low energy (LE), and a RFID protocol such as near field communication (NFC) 50 are suitable. Tanenbaum, *Computer Networks* (2010) describes these protocols in detail and is incorporated by reference herein.

35 The first mobile device 74 has an orientation determination component 58 that determines the orientation of the first mobile device 74 with respect to magnetic north and with respect to the earth's surface by using a variety of sources. For example, many mobile devices contain an accelerometer 54 and a compass 56 and gyroscopes (not shown) which function as suitable sources of orientation.

The first mobile device 74 optionally has a map component 62 that enables the first mobile device 74 to communicate over the Internet with a map provider such as Google maps, Apple maps, Nokia's HERE maps, and OpenStreet-Map. It is not essential to the invention which map provider is used.

FIGS. 2A-2F illustrate the details of the user interfaces of a mobile device.

50 FIG. 2A illustrates the first mobile device 74 includes a home screen 88 that displays a set of user selectable buttons: a remember place button 89, a share location button 90, and a find things button 92.

To illustrate the remember place feature, assume a first user named Alan is using the first mobile device 74 to find his car in a parking lot. If Alan selects the remember place button 89, the application logic 68 uses the user interface 70 of the first mobile device 74 to display a remember place screen 94 shown in FIG. 2B.

60 As shown in FIG. 2B, the screen 94 displays a field 96 that contains the name of the item whose location a user wants to remember. For example, the field 96 is a drop down menu that holds a value for Alan's car: "My Car" that is associated with location information in the parking lot.

65 To increase the types of items that can be identified, the field 96 can be an input field for names entered by the user. After entering the value either by menu or text field, the user

5

can save that value by clicking on a save place button **98**. The user can tag the item with other information beside or in lieu of the location information by selecting the “add picture” button **95**, the “add voice memo” button **97**, and/or the “add text note” button **99**, which will call up respectively, the camera, voice memo, and/or text feature of the first mobile device **74**. Thus, for Alan to find the place of an item (e.g., where he parked his car or bike, where he left a package, or his favorite store or restaurant) he can use the remember place feature to store coordinates and/or other location related information.

Referring to FIG. 2A, if Alan wants to share his location with others at an event such as a concert, he will select the share location button **90** of the home screen. Now the application logic **68** of the first mobile device **74** will display the share location screen **102** on the first mobile device **74** as shown in FIG. 2C.

As shown in FIG. 2C, Alan wants to share his location from 6-11 PM with Bob, Sarah, and Andrew at an event such as a concert. Alan adds values in the input fields such as “Concert” in the event field **101**, “6 PM” in the start time field **103**, “11 PM” in the end time field **105**, and the email addresses of Bob, Sarah, and Andrew in a guest field **104**. Alan will then press the send button **106**. The email addresses can be retrieved from the contact list of the first mobile device **74** or from Internet contact lists, e.g., LinkedIn, Facebook, and Yahoo contacts. On pressing the send button **106**, the application logic **68** will use the communication interface **66** to send a message to the first server **10** (FIG. 1) that will in turn send a message to a second mobile device **76**.

Let’s now assume a second user “Bob” uses the second mobile device **76** that receives the message. Bob will see a new entry “Alan @ Concert” on the list of the find things screen **108** as shown in FIG. 2D. Before 6 PM, the entry appears, but no distance will be indicated, because the time for location sharing has not begun. However, at 6 PM, the find things screen **108** will add Alan’s current distance and direction from Bob, e.g., Alan is 200 feet NW of Bob. The distance and direction updates periodically to track the locations of the first and second mobile devices **74**, **76**. At 11 PM, the Alan @ Concert entry **107** may be deleted from second mobile device **76** since the time of location sharing is over.

The find things screen **108** optionally includes an on-off slider **111** to make the second mobile device **76** visible to the first mobile device **74**, or make it visible to other mobile devices on the guest list, or invisible to everybody.

FIG. 2E illustrates the display screen **114** of the second mobile device **76** includes a compass **116**, a user selectable request to wave button **118**, and a beacon indicator **120**. As shown, the compass **116** displays that the first user Alan is at an event Concert, 200 feet away in the direction of the compass arrow. Optionally, the compass **116** may indicate north of NWSE directions.

FIG. 2F illustrates the display screen **122** of the first mobile device **74** includes a beaconing display **124** that will be used to find the first user, Alan as will be described in detail in FIGS. 3-8.

FIG. 3 illustrates interactions and communications among the mobile devices and a server. Initially, the first user **126** (e.g., Alan) of the first mobile device **74** will press a button Start App **125** that will send a HTTP request to compare the clock of the first mobile device **74** with the clock of the first server **10**. That time difference will be stored in the memory of the first server **10**, which will be used by the application later. The first mobile device **74** will display the home screen

6

88 as shown in FIG. 2A. The first user **126** will press the share location button **90**. The first mobile device **74** will display the screen **102** as shown in FIG. 2C. The first user **126** will complete the fields **101**, **103**, **104**, and **105** and press the send button **106** as illustrated in FIG. 2C. The first mobile device **74** sends a message **300** to the message logic **28** (FIGS. 1 and 16) of the first server **10**, which will send a notification message **302** to the second mobile device **76** to notify the second user **128** (e.g., Bob) that a new item **107** (e.g., Alan @ Concert) was added to the find things screen **108** of the second mobile device **76**. The first server **10** also sends a response **304** to the request **300** to confirm the notification **127** (e.g., email, text, or push notification) regarding the event (e.g., Concert) was sent to each guest on the guests list **104**.

Next, the second user **128** (e.g., Bob) of the second mobile device **76** will start the app **129** that will send a HTTP request to compare the clock of the second mobile device **76** with the clock of the first server **10**. That time difference will be stored in the memory of the first server **10**, which will be used by the application later. The second mobile device **76** will display the home screen **88** as shown in FIG. 2A. The second user **128** will press the find things button **92**. The second mobile device **76** will send a request **306** to the event logic **30** (FIGS. 1 and 17) of the first server **10**. The first server **10** reads the entries **107**, **109**, and **115** of the find things list in the database **24** (FIG. 1) and sends a response **308** to the second mobile device **76**. The response **308** includes a list of the entries as illustrated in the find things screen **108** of the second mobile device **76** as shown in FIG. 2D.

The first and second mobile devices **74**, **76**, as well as the other mobile devices, periodically update their coordinates to the first server **10** that keeps track of their respective locations.

The second user **128** of the second mobile device **76** will press the find button **110**. The second mobile device **76** will display the compass screen **114** as shown in FIG. 2E. The second user **128** of the second mobile device **76** will then press the request wave button **118**. The second mobile device **76** will send a request **310** to the beacon logic **32** (FIGS. 1 and 15) of the first server **10**. The first server **10** will read a list of users in the geographic area of interest and each of their beaconing sequences to identify what beaconing sequence is available for assignment as illustrated in FIG. 15. The first server **10** sends a message **312** with the assigned beaconing sequence **142** (FIG. 9) to the wave screen **122** of the first mobile device **74** as illustrated in FIG. 2F. Referring to FIG. 3, the first server **10** sends a response **314** with the assigned beaconing sequence **144** (FIG. 9) to the second mobile device **76**. A request to wave will trigger a beacon sequence on another mobile device so it is conspicuous and can be seen.

The second user **128** (e.g., Bob) now uses the compass **116** to get the distance (e.g., 200 feet) and direction of the first user **126** (e.g., Alan). In addition, the second user **128** can use the beaconing sequence **144** on the beaconing indicator **120** of his second mobile device **76** to indicate the beaconing sequence **142** being displayed on the first mobile device **74**. Now the second user **128** will be able to spot the first user **126** as long as the first mobile device **74** is visible to the second user **128**.

FIG. 4 illustrates a crowd gathered at an event such as concert with a stage **132**. Let’s assume the crowd **130** prevents or makes it difficult for a first user **126** (e.g., Alan) and the second user **128** (e.g., Bob) to locate each other. The

first mobile device **74** held by the first user **126** beacons which is seen by the second user **128** holding the second mobile device **76**.

FIG. **5** is a perspective view of FIG. **4** that illustrates how the first user is found by the second user. The first user **126** holds the beaconing first mobile device **74** (e.g., cell phone) apart from the crowd. The second user **128** holds a second mobile device **76** (e.g., cell phone) displaying a compass **116** that points to the first user **126** and includes a request to wave button **118** that was pressed to trigger beaconing on the first mobile device **74** and a beacon indicator **120**.

FIG. **6** is a perspective view of FIG. **4** that illustrates another context where a first user is found by a second user. The first user **126** holds the beaconing first mobile device **74** (e.g., a cell phone or tablet) apart from the crowd. The second user **128** holds or wears a second mobile device **77** (e.g., smart watch/electronic wearable) displaying a compass **116** that points to the first user **126** and includes a request to wave button **118** that was pressed to trigger beaconing on the first mobile device **74** and a beacon indicator **120**.

FIG. **7** illustrates a crowd gathered at an event such as concert with a stage **132**. Let's assume the crowd **130** prevents or makes it difficult for a first user **126** (e.g., Alan) and the second user **128** (e.g., Bob) to locate each other. In addition, unrelated persons at the event are using our method of location. Thus, the first user **126** is holding a first mobile device **74**, a third user **134** is holding a third mobile device **136**, and a fourth user **138** is holding a fourth mobile device **140**, which are all beaconing.

FIG. **8** is a perspective view of FIG. **7** that illustrates how our method would enable the second user to find the first user despite the presence of other beaconing mobile devices. The first user **126** holds the beaconing first mobile device **74** (e.g., cell phone) apart from the crowd **130**. The second user **128** holds a second mobile device **76** (e.g., cell phone) displaying a compass **116** that points to the first user **126** and includes a request to wave button **118** that was pressed to trigger beaconing on the first mobile device **74** and a beacon indicator **120**. This time, however, the third user **134** is near the first user **126**. The compass **116** is no longer sufficient to locate the first user **126**, because it points generally toward the first user **126** and the third user **134**. This is one situation where assigning a unique beaconing sequence can help locate the first user **126**.

FIG. **9** illustrates a beaconing sequence that can be flashed to locate a person in the crowd as shown in FIGS. **7-8**. The first mobile device **74** includes a screen **124** that flashes a yellow green beaconing sequence **142**. The second mobile device **76** includes a beaconing indicator **120** that flashes the yellow green beaconing sequence **144**. The third mobile device **136** includes a screen **121** that flashes an orange blue sequence **146**. A fourth user **138** holding a fourth mobile device **140** is flashing a red off beaconing sequence **148**.

The compass **116** can eliminate the fourth user **138** from consideration, because it points away from the fourth mobile device **140** as shown in FIG. **8**. However, the compass **116** points toward the first mobile device **74** and the third mobile device **136**. The second user **128** can distinguish the first user **126** from the third user **134**, however, because the orange blue beaconing sequence **146** contrasts with the yellow green beaconing sequence **144** on the beaconing indicator **120**. The beaconing sequences **142**, **144** can be synchronized to assure the second user **128** that it is the first user **126**.

FIG. **10** illustrates a variety of beaconing sequences which can be assigned to a given mobile device by the first

server **10**. As shown, a beaconing sequence is a combination of colors, timing, icons and text delivered in segments that will enable a user to locate another user of interest in a crowd. For example, the beaconing sequence could simply be a single color such as yellow **150** that is displayed. To increase visibility, the beaconing sequence could be a flashing color such as red **152**, multiple alternating colors such as yellow-green-yellow **154**, or multiple colors in a repeating sequence of segments such as red, white, and blue **156**. Further, the beaconing sequence can be multiple colors displayed at the same time such a segment of yellow/green **158**, or an icon (static or dynamic) on a background color(s) such orange **160**, or an icon on alternating background colors such as red and gold **162**, or a non-repeating sequence of multiple colors **164**.

FIGS. **11-12** illustrate assigning beaconing sequences in a location cell that would be useful in a crowded environment such as Times Square. Let's assume the second user **128** is at the corner of W. 47th Street and Broadway looking for the first user **126** who is at W. 46th Street and 7th Avenue at about 10 PM on December 31st, just before the New Year celebration. A third user **134** is at 46th and Broadway and a fourth user **138** at W. 49th Street and Broadway. The third user **134** and fourth user **138** are using the application, but are not in the same group as defined by the first user **126** which included only the second user **128**. The third user **134** with a mobile device **136** is assigned an orange-blue beaconing sequence **254**. Since the first user **126** and the third user **134** are in the same location cell **240**, to avoid a conflict the first server **10** assigns a different beaconing sequence such the yellow-green sequence **250** to be displayed on the first mobile device **74** of the first user **126**. In contrast, the fourth user **138** with mobile device **140** in a non-adjacent cell such as location cell **244** can be assigned a similar yellow-green beaconing sequence **256**. The first server **10** can extend the assignment of the unique beaconing sequences for each location cell beyond the location cell **240** of the first user **126** and the location cell **242** of the second user **128** to one or more surrounding location cells such as cell location **246**, which is non-adjacent to location cell **240**. FIG. **11** illustrates the location cells as hexagonal, but it could be a variety of geometric planar shapes such as a square, a rectangular, circle, or a triangle, or any shape that can be arranged in a grid or a geometric 3D shapes such as a cube, a cylinder, or a prism.

FIGS. **13-14** illustrate assigning beaconing sequences by venue that would be useful in adjacent venues such as an amusement park, a stadium and a shared parking lot. Initially, the first user **126** with a mobile device **74** and the fourth user **138** with a mobile device **140** are both in the first venue **258** (e.g., the shared parking lot). In the first venue **258**, the first server **10** has assigned a yellow blue beaconing sequence **268** to the first mobile device **74**, and the flashing red beaconing sequence **272** to the fourth mobile device **140**. The first and fourth users **126**, **138** are both using the application, but are not in the same group. Next, the fourth user **138** travels to a location **266** in a second venue **260** (e.g., a sports stadium). Since no other user is assigned the flashing red beaconing sequence **272** in the second venue **260**, the fourth user **138** can continue using it. In contrast, when the first user **126** travels to a location **264** in a third venue **262** (e.g., an amusement park), the first server **10** will assign the flashing red beaconing sequence **274** to the first mobile device **74** to avoid a conflict with the third user **134** whose mobile device **136** was previously assigned the yellow blue beaconing sequence **278** in the third venue **262**.

Now the second user **128** can readily find the first user **126** using the same flashing read beaconing sequence **274** and **276**.

FIG. **15** illustrates a flow diagram for the beaconing logic that runs on the server of FIGS. **1** and **3**. Hunter et al., *Java Servlet Programming* (2001) describes Java Servlet programming that can be used to implement the beaconing logic and is incorporated by reference herein. As shown in FIG. **15**, the beacon logic **32** (FIG. **1**) that runs in the first server **10** begins when the second user **128** presses the wave request button **118** on the screen **114** of the second mobile device **76** (FIG. **2E**). The second mobile device **76** will send a request (e.g., HTTP request) to the first server **10**. At step **164**, the first server **10** will read the request, which includes the clock value of the second mobile device **76**. At step **168**, the first server **10** will read the location of the first and second mobile devices **74**, **76**. The first server **10** will perform a time sync that reads its own clock and receives the time stamp of each of the first and second mobile devices **74**, **76**. As a reminder, the first mobile device **74** also performs a time sync (e.g., FIG. **3**, Start of App **125**) that includes a clock value of the first mobile device **74**. In an embodiment, the time sync can be performed multiple times and averaged. The time sync may be done once or periodically, and will depend on accuracy of the mobile device clocks, and clock drift. Any difference between the clocks is stored in a memory accessible to the first server **10**, and represents an offset that can be used to ensure the beaconing sequence of the first mobile device **74** and the second mobile device **76** are on the same clock. At step **170**, the first server **10** will look up the beaconing sequence history table, which is stored in the database **24**. Each record in the table will contain: beaconing sequence, the geographic location, and the time of the sequence. At step **172**, the beacon logic **32** will execute a database query that filters on location and time so that only recent beaconing sequences from other users in the area will be in the result. If there are no recent beaconing sequences used by other users in the area, the beacon logic **32** will move to step **174**. At step **174**, the beacon logic **32** will perform a lookup of the first user's preference for a beaconing sequence. At step **176**, the beacon logic **32** will calculate the beaconing sequence from the preference of the first user **74**.

If there are recent beaconing sequences used by other users in the area at step **172**, the beacon logic **32** will move to step **178**. At step **178**, the beacon logic **32** will read the record of the beacon sequence in the beaconing sequence history table that was recently used in the area. At step **180**, the beacon logic **32** will add the beacon sequence to a sequence list that contains all the beacon sequences that cannot be used in the area by the first user **126**. At step **182**, the beacon logic **32** will determine if there is another record returned from the query of the database **24**. If yes, the beacon logic **32** will return to read the next beacon history record. This loop continues until all of the beacon sequence records are processed. If no, the beacon logic **32** will go to step **184**. At step **184**, the beacon logic **32** will calculate the beacon sequence that will be used by the first user **126**. In an embodiment, this calculation can optimize the difference between the color(s) in the beaconing sequence to be used by the first user **126** and those already in use. At step **186**, the beacon logic **32** adds the calculated beacon sequence to the beacon history table. At step **188**, the beacon logic **32** sends a response with the calculated beacon sequence **126**, which is received by the first mobile device **74** at step **120** (FIG. **3**).

FIG. **16** illustrates a flow diagram for the message logic that runs in the server of FIGS. **1** and **3**. The first user **74** will

complete the fields shown in FIG. **2C**. As shown in FIG. **2C**, the screen **102** displays the fields: an event name **101**, a start time **103**, an end time **105**, and a list of guests **104**. In an embodiment, the list of guests **104** is the email addresses of the guests.

Referring to FIG. **16**, at step **106**, the first user **126** presses the send button **106** (FIG. **2C**), which causes the first mobile device **74** to send a request **300** to the first server **10**. The request **300** includes the information that the user input into one or more of the fields shown in FIG. **2C**. The message logic **28** reads the request at step **190**. At step **192**, the message logic **28** adds the request information as an entry into the Event table in the database **24**. At step **194**, the message logic **28** will read the identifying information (e.g., email address or cell phone number) of the next guest in the list **104** (FIG. **2C**). At step **196**, the message logic **28** will perform a lookup in the user in the database **24**. At step **198**, the message logic **28** will check if the user has the application. If yes, the message logic **28** will add an entry in the user event table at step **202**. Next, at step **204**, the message logic **28** will perform a lookup of the user's notification preferences (e.g., email, text message, push notification, automated phone call, or a social media post). At step **206**, the message logic **28** will send a notification using the preferred method(s) to the second mobile device **76**. In addition, the message logic **28** will send a message to add an entry **107** to the find things screen **108** (FIG. **2D**) of the second mobile device **76**. Next, at step **208**, the message logic **28** will check if another user is on the guest list. If yes, the message logic **28** will return to step **194**. If not, that is, it was the last user on the guest list, the message logic **28** will send a response **304** (FIG. **3**) to the first mobile device **74** at step **210**. As a result, a confirmation is received by the first mobile device **74** at step **211**.

FIG. **17** illustrates a flow diagram for the event logic that runs on the server of FIGS. **1** and **3**. At step **92**, the second user **128** will press the find things button **92** (FIG. **2A**) on the second mobile device **76**, which sends a request **306** to complete the find things screen to the first server **10**. At step **212**, the first server **10** reads the request that includes the identity of the second user **128**. At step **214**, the event logic **30** will perform a lookup of all entries for the second user **128** in the user event table in the database **24**. The event logic **30** will read each entry from the user event table at step **216**. At step **218**, the event logic **30** will add the information from the entry to the find things list that will eventually be returned to the second mobile device **76** to create the find things screen **108** in FIG. **2D**. At step **220**, the event logic **30** will read if another entry exists in the user event table. If yes, the event logic **30** will return to step **216**. If no, the event logic **30** will go to step **222**. The event logic **30** will prioritize the find things list at step **222** then send it in a response **308** (FIG. **3**) at step **228** to generate the screen **108** (FIG. **2D**) with entries pertaining to the second user **128** on the second mobile device **76**.

FIG. **18A-18F** is a set of flow diagrams that illustrate the application logic that runs on the mobile device.

FIG. **18A** illustrates the application that runs on the mobile device. The application **64** includes communication interface **66**, the application logic **68**, and the user interface **70**. At step **352**, the application logic **68** will use the communication interface **66** to send a time stamp as described in FIG. **3**. At step **354**, the application logic **68** uses the user interface **70** to draw the screen **88** shown in FIG. **2A**. At step **356**, the application logic **68** determines if the user pressed the remember place button **89** shown in FIG. **2A**. If yes, the application logic **68** exits to entry point

11

B on FIG. 18B. If no, the application logic 68 goes to step 360. At step 360, the application logic 68 determines if the user pressed the share location button 90 shown in FIG. 2A. If yes, the application logic 68 exits to entry point C on FIG. 18C. If not, the application logic 68 goes to step 364. At step 364, the application logic 68 determines if the user pressed the find things button 92 shown in FIG. 2A. If yes, the application logic 68 exits to entry point D on FIG. 18D. If no, the application logic 68 goes to step 368. At step 368, the application logic 68 waits a time period (e.g., 10 ms) then goes to step 356.

FIG. 18B illustrates the application that runs on the mobile device. At step 370, the application logic 68 uses the user interface 70 to draw the screen 94 shown in FIG. 2B. At step 372, the application logic 68 determines if the user pressed the save place button 98 shown in FIG. 2B. If yes, the application logic 68 goes to the remember place at step 374. At step 374, the application logic 68 stores the current location in the memory of the mobile device and optionally sends the location information to be stored on the first server 10 and preferably the database 24. The application logic 68 exits to entry point A on FIG. 18A. At step 376, the application logic 68 determines if the user pressed the add picture button 95 shown in FIG. 2B. If yes, the application logic 68 will show the camera at step 378. At step 380, the application logic 68 stores the picture (e.g., a landmark near the place to be remembered) in the memory of the mobile device and optionally sends the picture to be stored on the first server 10 and preferably the database 24. At step 382, the application logic 68 determines if the user pressed the add memo button 97 shown in FIG. 2B. If yes, the application logic 68 goes to record voice feature at step 384. At step 386, the application logic 68 stores the voice memo (e.g., a description about the place to be remembered) in the memory of the mobile device and optionally sends the recorded voice memo to be stored on the first server 10 and preferably the storage 24. At step 388, the application logic 68 determines if the user pressed the add text note button 99 shown in FIG. 2B. If yes, the application logic 68 uses the user interface 70 to show a keyboard at step 390. At step 392, the application logic 68 stores the text note (e.g., a text note about the place to be remembered) in the memory of the mobile device and optionally sends the text note to be stored on the first server 10 and preferably the database 24. If the user did not press buttons 95, 97, 98, or 99, the application logic 68 will determine if the user pressed the back button 100 as shown in FIG. 2B at step 394. If not, application logic 68 waits a time period (e.g., 10 ms) at step 396. After steps 380, 386, and 392, the application logic 68 waits at step 396.

FIG. 18C illustrates another feature of the application that runs on the mobile device. FIG. 18C begins by entering from point C on FIG. 18A. At step 398, the application logic 68 uses the user interface 70 to draw the share location screen 102 shown in FIG. 2C. The input fields of share location screen 102 are initially empty (not shown). At step 399, the user will enter values into the input fields as previously shown in FIG. 2C. At step 400, if the user presses the back button 100 (FIG. 2C), the application logic 68 will go to entry point A on FIG. 18A to draw the home screen 88 shown in FIG. 2A. If not, the application logic 68 will determine if the user pressed the send button 106 as shown in FIG. 2C. If not, the application logic 68 waits a time period (e.g., 10 ms) at step 408. If yes, the application logic 68 will determine if the user input is valid at step 404. If not, the application logic 68 will notify the user that the input is not valid at step 410. If yes, the application logic 68 will send share location information to be stored on the first

12

server 10 and preferably on the database 24 at step 406. At step 412, the server will send a response to the mobile device then the application logic 68 exits to entry point A on FIG. 18A.

FIG. 18D illustrates another feature of the application that runs on the mobile device. FIG. 18D begins by entering from point D on FIG. 18A or FIG. 18E. At step 414, the application logic 68 will send a request with the identity of the user to the first server 10 (FIG. 1). The event logic 30 will use the user identity to look up all of the entries of that user in the user event table then prepare a find things list which will be returned in a response to the user's mobile device. The application logic 68 of the mobile device will parse the response at step 416. At step 418, the application logic 68 will draw the find things screen 108 in FIG. 2D. At step 420, the application logic 68 will update the status text in each entry of the find things screen 108. Referring to screen 108 on FIG. 2D, the entry 107 (e.g., Alan @ Concert) the status text is "200 feet NW." In contrast, the "Alan @ Concert" will not change and thus will not be updated. If not, at step 424, the application logic 68 determines if the second user 128 pressed any of the find buttons such as button 110, 112, 117, or 119 as shown in FIG. 2D. If yes, the application logic 68 will go to entry point E on FIG. 18E. If not, the application logic 68 goes to step 428 to determine if the second user 128 switched any visibility button on or off (FIG. 2D, button 111 is on, and button 113 is off). When the visibility switch 111 is "on" the second user 128 (e.g., Bob) is visible to the first user 126 (e.g., Alan) and if the switch 111 is "off" the second user 128 is not visible. The visibility switch could be referred to as a toggle button. At step 430, the application logic 68 uses communication interface 66 to call the first server 10 to change the visibility settings for the second user 128 in database 24. At step 432, the application logic 68 will wait for a time period (e.g., 10 ms) then proceed to step 420.

FIG. 18E illustrates another feature of the application that runs on the mobile device. FIG. 18E begins by entering from point E on FIG. 18D. At step 434, the application logic 68 uses the communication interface 66 to call the first server 10 to get user locations. At step 436, the application logic 68 calculates the distance between users and updates the compass 116 on the screen 114 shown in FIG. 2E. At step 440, the application logic 68 will determine if there is a beacon notification on the first mobile device 74. If yes, the application logic 68 will read a beacon sequence at step 442, and at step 448 draw the screen 122 shown in FIG. 2F. At step 450, the application logic 68 updates a segment of the beaconing sequence, then waits until the end of the segment at step 454 then determines if the beaconing sequence is finished at step 456. If not, the application logic 68 will repeat the loop beginning at step 450. If the beaconing sequence is finished, the application logic 68 will draw another screen (e.g., FIG. 2A, 2D, or 2E or a message screen (e.g., text or voice) to allow the first user 126 to communicate and assist in finding the second user 128 at step 457. At step 453, the application logic 68 will wait for a time period (e.g., 10 ms) then proceed to step 436.

FIG. 18F illustrates an embodiment of the application that runs on the mobile device. FIG. 18F begins by entering from point F on FIG. 18E. At step 458, the application logic 68 uses the communication interface 66 to call the first server 10 to get the beacon sequence for the beacon indicator 120 on the screen 114 as shown in FIG. 2E. At step 460, the application logic 68 reads the beacon sequence and updates the beacon indicator 120 (FIG. 2E) at step 464. At step 466, the application logic 68 will wait until the end of the current

13

segment of the beacon sequence then proceeds to step 468. At step 468, the application logic 68 will determine if it is the last segment of the beacon sequence, that is, the beacon sequence is finished. If yes, the application logic 68 will exit to entry point E on FIG. 18E.

What is claimed:

1. A method executed on a server for displaying a visible beacon sequence to a first user of a first mobile device and to a second user of a second mobile device at an event in a geographic area, wherein the server has identified the first mobile device and the second mobile device, comprising:

identifying a first mobile device to the server;
identifying a second mobile device to the server;
receiving a request from the first mobile device to share location at an event with the second mobile device;
sending a message to the second mobile device to notify the second user that the event was added to the second mobile device;

receiving a message from the second mobile device regarding the event at the location;

receiving the locations of the first mobile device and the second mobile device; and

after the server determines that the first mobile device and the second mobile device are located at the event in the geographic area, sending a visible beacon sequence to the first mobile device and to the second mobile device that is conspicuous and can be seen in the line of sight by the first user or the second user to enable them to locate each other.

2. The method of claim 1, further comprising using location information of the first mobile device and the second mobile device to determine the direction and/or distance from the second mobile device to the first mobile device.

14

3. The method of claim 2, further comprising displaying a compass on the second mobile device that indicates the location of the first mobile device.

4. The method of claim 3, further comprising updating coordinates for the compass on the second mobile device that indicates the location of the first mobile device.

5. The method of claim 1, wherein the assigned beacon sequence on the first mobile device is visibly different from any other beacon sequences used in the geographic area.

6. The method of claim 1, further comprising computing an offset for displaying the beaconing sequence at the same time on the first mobile device and the second mobile device.

7. The method of claim 6, wherein computing the offset includes comparing the clock of the first mobile device and the second mobile device with the clock of the server.

8. The method of claim 1, further comprising using venue or cell location to determine the geographic area.

9. The method of claim 1, wherein the second mobile device is an electronic wearable.

10. The method of claim 1, wherein the second mobile device is a smart watch.

11. The method of claim 1, wherein the first mobile device is an electronic wearable.

12. The method of claim 1, further comprising displaying a user selectable visibility button on the second mobile device.

13. The method of claim 1, wherein the server receives a request from the first user of the first mobile device.

14. The method of claim 1, wherein the server receives a request from the second user of the second mobile device.

* * * * *